

DISTRIBUTION STATEMENT A.
APPROVED FOR PUBLIC RELEASE
DISTRIBUTION IS UNLIMITED.

(F) REVIEWER ACTIVITIES: GS, 84, SM, EA, AR
PREPARING ACTIVITY: 69


(F) This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetive use shall be made from this document.

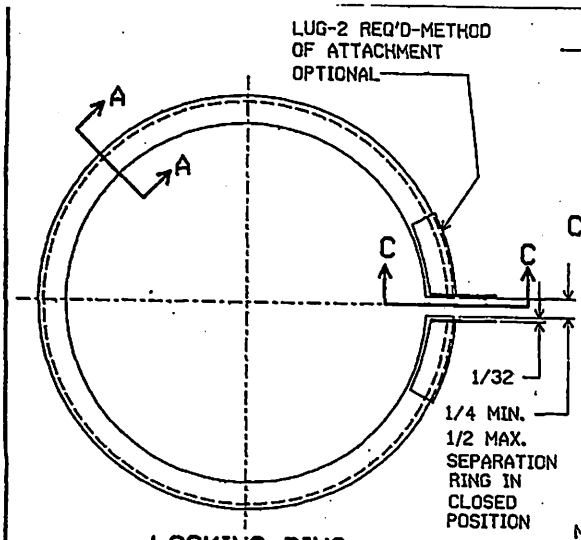


LOCKING RING

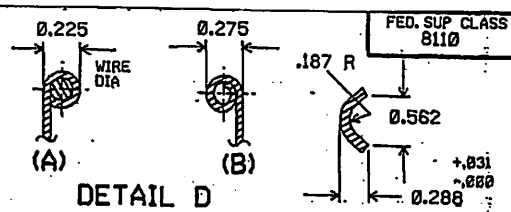

DETAIL D
CONSTR. OPTIONAL SECTION A-A

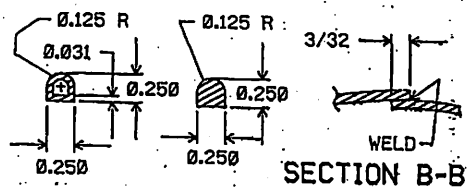


GASKET ALT. GASKET
SECTION B-B

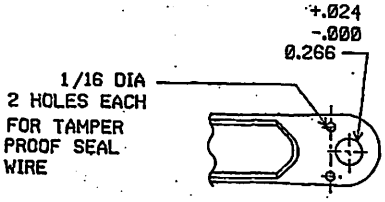


VIEW C-C (TYP)


NOTE: (F) NUT AND BOLT
FURNISH WITH TIN OR ZINC FLAKE/CHROMATE OR ELECTRO-PLATED ZINC; PLATED HEX HD 1/4-20 NC-2A X 1-1/2 LG BOLT THRD LGTH 1-1/2 IN., SCREWDRIVER SLOT 1/16 X 3/32 DP. WITH NUT OR 1/4-20 NC-2A X 1-1/2 LG. RD. HD. THRD LENGTH 1-1/2 SCREWDRIVER SLOT 1/16 X 3/32 DP. WITH NUT,
SEE FOLLOWING SPECIFICATIONS.
MIL-T-10727 (.0003 TO .0005 IN THICK)
MIL-C-87115 CLASS 3
ASTM B633 TYPE II - OLIVE DRAB, SC-2

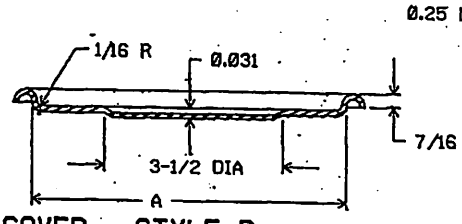


COVER - STYLE R

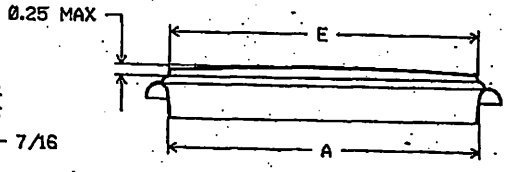

COVER - STYLE D

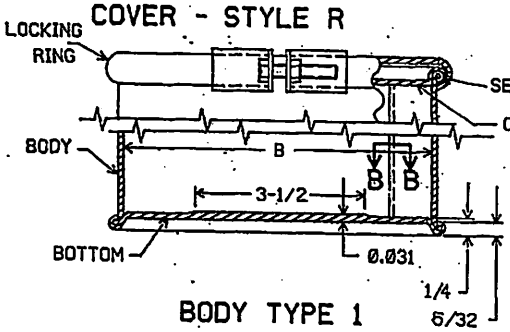

BODY TYPE 1

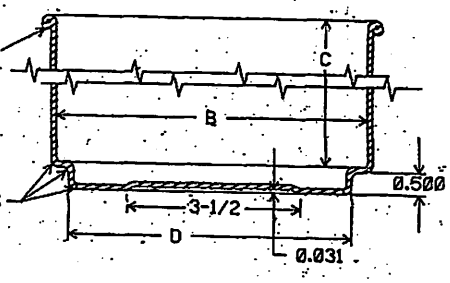

BODY TYPE II

REDRAWN

APPROVED 1 FEB 1956 REVISED (F) 15 DEC 1987

P.A. AIR FORCE 69 Other Cust ARMY - GL NAVY - SA	INTERNATIONAL INTEREST	TITLE: DRUMS, METAL, REUSABLE SHIPPING AND STORAGE	MILITARY STANDARD MS24347
PROCUREMENT SPECIFICATION: MIL-D-6055	SUPERSEDES: MS24347 REV E		SHEET 1 OF 3

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetive use shall be made from this document.

(F) REVIEWER ACTIVITIES: GS, 84, SM, EA, AR
PREPARING ACTIVITY: 69

DISTRIBUTION STATEMENT A.
APPROVED FOR PUBLIC RELEASE
DISTRIBUTION IS UNLIMITED.

DD FORM 672-1

P.A. AIR FORCE 69
Other Cust
ARMY - GL
NAVY - SA

INTERNATIONAL INTEREST

PROCUREMENT SPECIFICATION
MIL-D-6055

SUPERSEDES:
MS24347 REV E

TITLE

DRUMS, METAL, REUSABLE
SHIPPING AND STORAGE

REDRAWN

MILITARY STANDARD
MS24347

SHEET 2 OF 3

FED. SUP CLASS
8110

COMPONENTS TABLE II

DRUM ASSY (STYLE "R" COVER)	DRUM ASSY (STYLE "D" COVER)	CAPACITY (IN^3)	BODY TYPE I	BODY TYPE II	COVER STYLE "R"	COVER STYLE "D"	LOCKING RING	GASKET	A +0 -1\64 DIA	B +1/64 -0 DIA	C	D	E
MS24347-1	MS24347-11	88	MS24347-21		MS24347-41	MS24347-51	MS24347-61	MS24347-81	5	5	4-1/2	4-1/4	4-11/16
MS24347-1D	MS24347-11D			MS24347-31							8-1/2		
MS24347-2	MS24347-12	167	MS24347-22										
MS24347-2D	MS24347-12D			MS24347-32									
MS24347-3	MS24347-13	149	MS24347-23		MS24347-42	MS24347-52	MS24347-62	MS24347-82	6-1/2	6-1/2	4-1/2	5-3/4	6-3/16
MS24347-3D	MS24347-13D			MS24347-33							6-3/4		
MS24347-4	MS24347-14	224	MS24347-24								8-1/2		
MS24347-4D	MS24347-14D			MS24347-34									
MS24347-5	MS24347-15	282	MS24347-25										
MS24347-5D	MS24347-15D			MS24347-35									
MS24347-6	MS24347-16	340	MS24347-26		MS24347-43	MS24347-53	MS24347-63	MS24347-83	8-1/2	8-1/2	6	7-3/4	8-3/16
MS24347-6D	MS24347-16D			MS24347-36							7-1/2		
MS24347-7	MS24347-17	425	MS24347-27								9		
MS24347-7D	MS24347-17D			MS24347-37									
MS24347-8	MS24347-18	510	MS24347-28										
MS24347-8D	MS24347-18D			MS24347-38									

TYPE OF CONSTRUCTION: BODIES MAY BE FORMED AS SHOWN IN TYPE I OR DRAWN AS SHOWN IN TYPE II.
MS PART NUMBERS LISTED ARE FOR CLASS "S" (STEEL) FORMED DRUM ASSEMBLY AND COMPONENTS.
(F) FOR CLASS "A" (ALUMINUM ALLOY) DRUM ASSEMBLY AND COMPONENTS, ADD AN "A" IN PLACE OF THE DASH IN THE PART NUMBER, I.E. MS24347A3 OR MS24347A5I.
WHEN ORDERING A DRAWN DRUM (TYPE II), ADD A SUFFIX "D" TO THE NUMBER, I.E. MS24347-4D OR MS24347A18D.

(F) MATERIAL: STEEL, ASTM-A366 BODY, BOTTOM, AND COVER—5 INCH DIA DRUMS, 26 GAGE; 6-1/2 AND 8-1/2 INCH DIA DRUMS, 24 GAGE. STEEL, ASTM-A109, LOCKING RING, 20 GAGE. LUGS, 14 GAGE.
FOR ALUMINUM ALLOY, GASKETS, CUBIC CAPACITY, AND MARKING, SEE PROCUREMENT SPECIFICATION.

NOTES:
(F) REFERENCED GOVERMENT DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATION AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

FOR METRIC CONVERSION SEE TABLE III

APPROVED 1 FEB 1956 REVISED (F) 15 DEC 1987

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
8110

DISTRIBUTION STATEMENT A.
APPROVED FOR PUBLIC RELEASE
DISTRIBUTION IS UNLIMITED.

(F) REVIEWER ACTIVITIES: GS, 84, SM, EA, AR
PREPARING ACTIVITY: 69

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetive use shall be made from this document.

(F)

TABLE III			
FRACTION	DECIMAL	CENTIMETER	LOCATION
3/125	.024	.0610	MS24347
1/32	.031	.07874	" "
1/32	.03125	.07938	" "
1/16	.0625	.15875	" "
3/32	.09375	.23813	" "
1/8	.1250	.3175	" "
5/32	.156	.396	" "
3/16	.187	.4763	" "
3/16	.1880	.47752	" "
25/111	.225	.572	" "
1/4	.2500	.6350	" "
17/64	.266	.67564	" "
17/64	.2750	.6985	" "
100/347	.288	.732	" "
7/16	.4375	1.111	" "
1/2	.5000	1.270	" "
9/16	.5625	1.430	" "
1-1/2	1.5000	3.810	" "
3-1/2	3.5000	8.890	" "
4-1/4	4.2500	10.795	" "
4-11/16	4.6875	11.906	" "
5	5.000	12.700	" "
5-3/4	5.750	14.605	" "
6	6.000	15.240	" "
6-3/16	6.1875	15.716	" "
6-1/2	6.500	16.510	" "
6-3/4	6.7500	17.145	" "
7-1/2	7.500	19.05	" "
7-3/4	7.750	19.685	" "
8-3/16	8.1875	20.7963	" "
8-1/2	8.5000	21.59	" "
9	9.000	22.86	" "

DIMENSIONS IN INCHES
TOLERANCES

FRACTIONS	DECIMALS
+- 1/32	.X = +- .1
	.XX = +- .03
	.XXX = +- .003

APPROVED 1 FEB 1956 REVISED, (F) 15 DEC 1987

REDRAWN

P.A. AIR FORCE 69 Other Cust ARMY - GL NAVY - SA	INTERNATIONAL INTEREST	TITLE DRUMS, METAL, REUSABLE SHIPPING AND STORAGE	MILITARY STANDARD MS24347
PROCUREMENT SPECIFICATION MIL-D-6055	SUPERSEDES: MS24347 REV E		SHEET 3 OF 3

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.