FED. SUP CLASS
FSC 5935

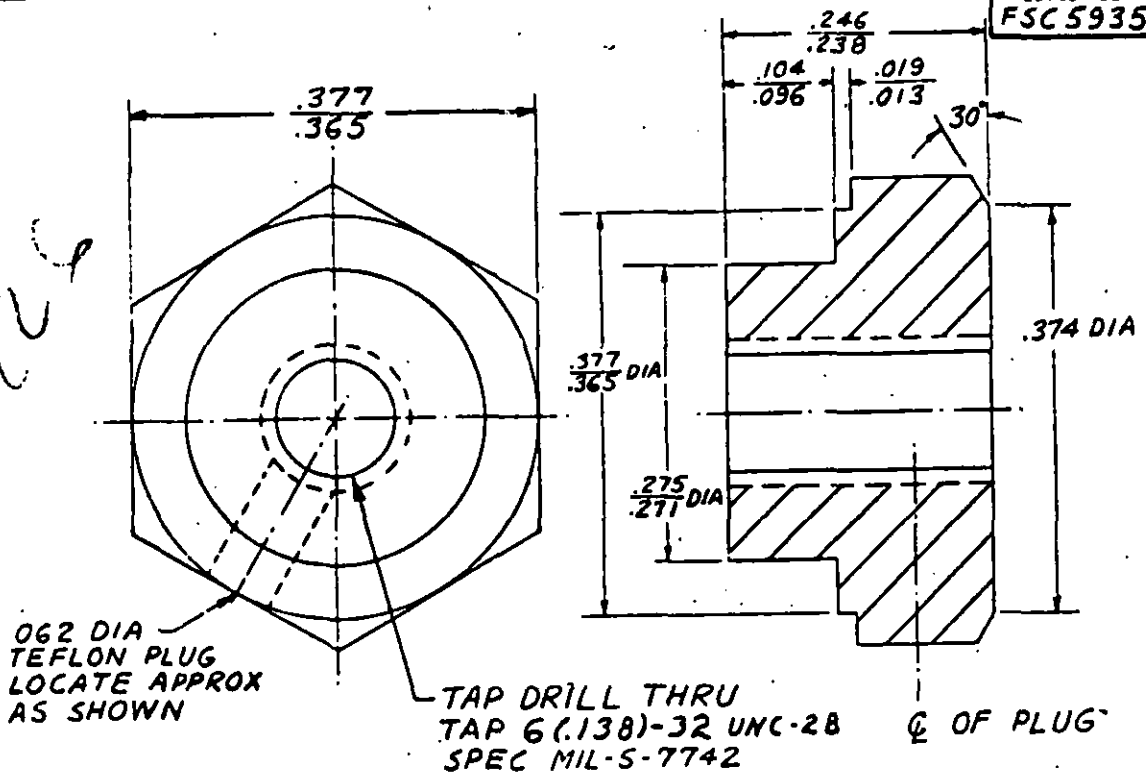


| | MS PART NUMBER | MATERIAL |
|---|---|---|
| (A) | MS 24700-1 | ALUMINUM ALLOY, SPEC. QQ-A-267, TEMPER-T4 |
| | MS 24700-2 | STAINLESS STEEL SPEC. QQ-S-763, TYPE 302 |

(A) MS24700-1 TO BE CADMIUM PLATED, SPEC. QQ-P-416 TYPE II, CLASS 3.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ± 2°.

ALL DIAMETERS TO BE CONCENTRIC WITH EACH OTHER WITHIN .002 T.I.R.

REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN

APPROVED 18 Oct 60 REVISED (A) 7 MAR 62

| P.A. USAF Other Cust | TITLE: BUSHING, FIXED, CONNECTOR, RACK AND PANEL, MINIATURE | MILITARY STANDARD MS24700 (USAF) |
|---|---|---|
| PROCUREMENT SPECIFICATION MIL-C-26518 | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

AF Hoover-Dayton Co., 20 April 1963 2800

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.