FED. SUP CLASS
5935

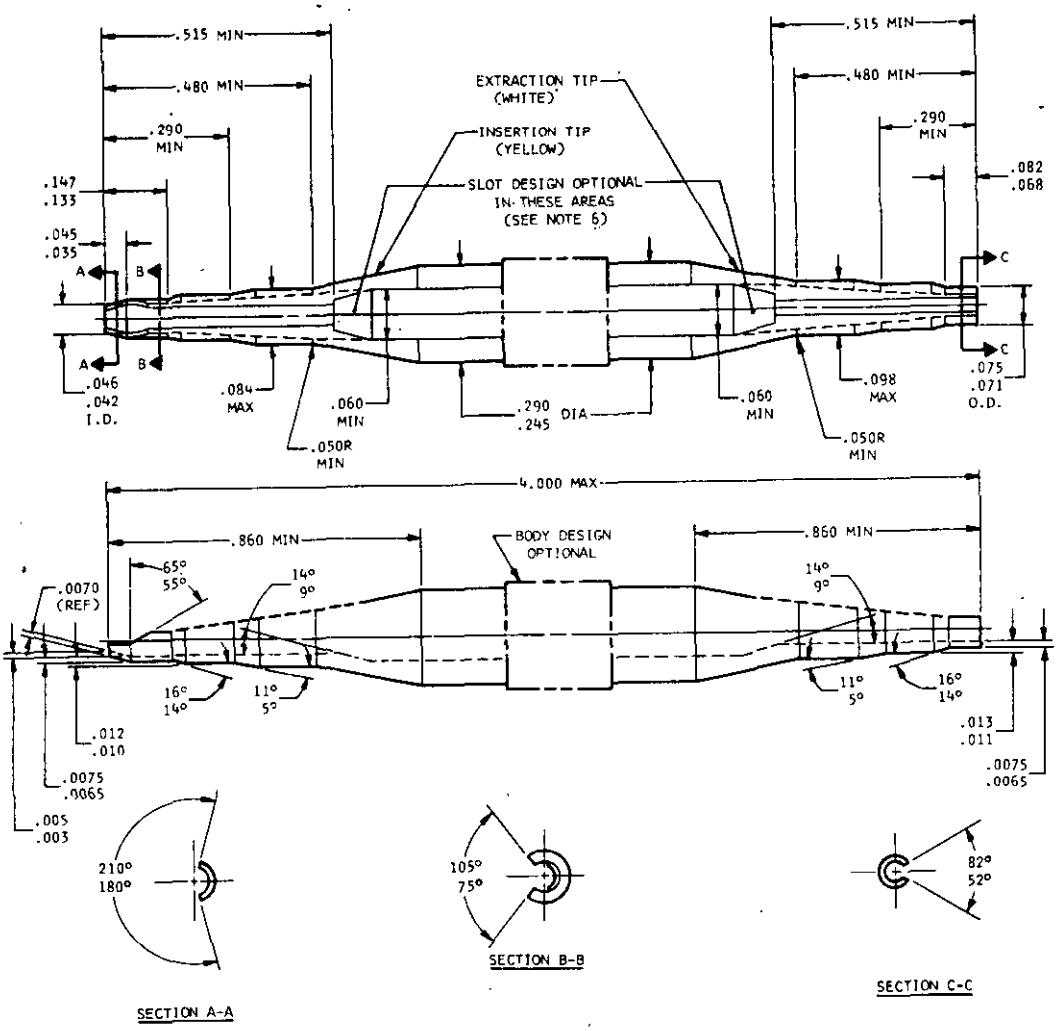

SECTION A-A

SECTION B-B

SECTION C-C

PART NO.	USE WITH CONTACTS
-22	M39029/15-22-28
	M39029/15-22-22
	M39029/16-23-28
	M39029/16-23-22
	M39029/17-23-28
	M39029/17-23-22
	M39029/18-23-28
	M39029/18-23-22

(A) CANCELED AFTER
20 JUNE 1979
USE MIL-I-81969/16

NOTES:
1. MATERIAL: INSERTION AND EXTRACTION TIP MOLDED ACETAL OR POLYAMIDE PLASTIC OR EQUIVALENT.
2. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
3. THE INSERTION AND EXTRACTION TIPS SHALL BE IDENTIFIED WITH THE WORD "INSERT" OR "EXTRACT", AS APPLICABLE, CLEARLY IMPRINTED ON THE OUTER SURFACE OF TIP.
4. PLASTIC TIPS MUST BE SMOOTH AND FREE FROM BURRS AND SHARP EDGES.
5. PART NUMBERS, INCLUDING DASH NUMBERS, SHALL BE PERMANENTLY MARKED ON THE SIDE OF TOOL BODY.
6. SLOT DESIGN SHALL ALLOW ALL APPLICABLE WIRE SIZES TO SNAP INTO TOOL FREELY.

Reviewer symbols:
Navy — EC

APPROVED 18 OCT 71 REVISED (A) 20 JUNE 1979

This standard has been approved by the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy — AS Other Cust	TITLE TOOL, INSERT-EXTRACT, ELECTRIC CONNECTOR, SIZE 22, 20, 16 AND 12	MILITARY STANDARD MS 3160 (NAVY)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 6

DD FORM 672-1 N LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 5935-N783-25

Source: https://assist.dla.mil -- Downloaded: 2026-10-23113:00Z
Check the source to verify that this is the current version before use.

*U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/2797