INTERIM FEDERAL SPECIFICATION

MARLINESPIKE (MANILA ROPE)

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D.C., 20407, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE

1.1 Scope. This specification covers one type and size marlinespike for use in opening and separating strands of manila rope for splicing.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, or request for proposals, form a part of this specification:

Federal Standards:
Fed. Std. No. 102 - Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:
MIL-H-15424 - Hand Tools, Packaging of.

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Material. The marlinespike shall be made of high carbon steel.

3.2 Design. The marlinespike shall conform to dimensions specified in figure 1. The pointed end of the spike shall be slightly oval shaped to assist in loosening and opening rope strands. The head shall be beveled to provide a comfortable grip in the palm of the hand. The eye shall be smooth and edges rounded to prevent cutting or chafing the lanyard used for hanging the spike.

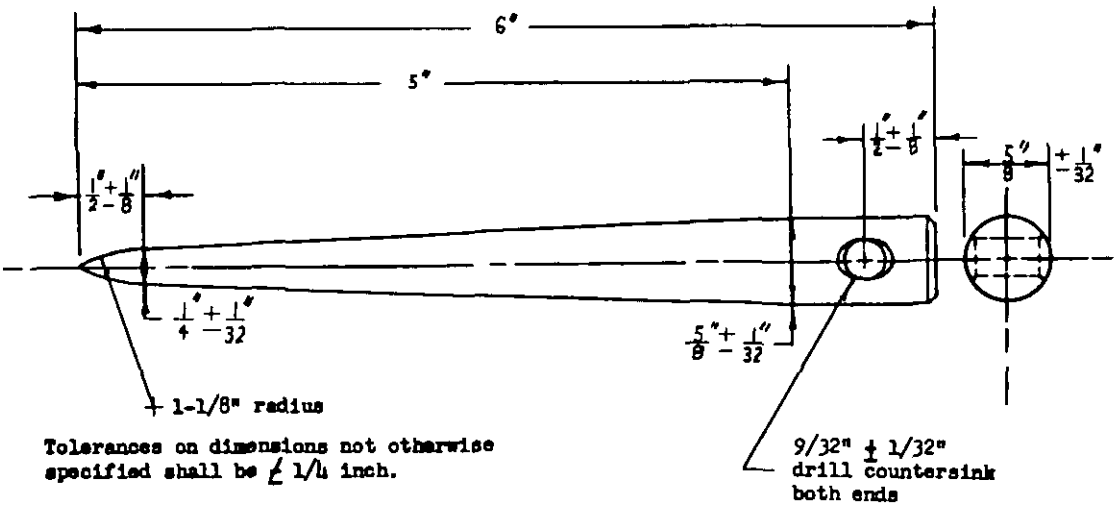


Figure 1. - Marlinespike.

3.3 Finish. The marlinespike shall be smoothly polished and free from burrs or other defects that might impair serviceability.

3.4 Workmanship. Workmanship shall be first class in every respect.

4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with provisions set forth in MIL-STD-105.

4.2.1 End product inspection. The sample unit shall consist of one marlinespike. A lot shall consist of tools of one type offered for acceptance at one time.

4.2.2 Sampling for visual examination. Sampling for visual examination shall have an inspection level of II with an acceptable quality level (AQL) of 4.0 defects per 100 units.

4.2.3 Sampling for dimensional examination. The inspection level for dimensional examination shall be level S-3 with an AQL of 2.5 defects per 100 units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

4.3 Inspection of marlinespikes.

4.3.1 Visual examination. Each sample marlinespike shall be visually examined for defects in material and workmanship. Any deviation from requirements specified herein shall be considered a defect.

4.3.2 Dimensional examination. Each sample marlinespike shall be examined for conformance with dimensional requirements specified herein. Any deviation shall be considered a defect.

4.4 Examination of preparation for delivery. Inspection to determine compliance with preparation for delivery shall be made in accordance with MIL-H-15424.

5. PREPARATION FOR DELIVERY
(Civil agencies should refer to Fed. Std. No. 102 for definitions and application of the various levels of packaging protection for supplies and equipment.)

5.1 Cleaning, preservation and packaging.

5.1.1 Level A. Level A cleaning, preservation, and packaging shall be in accordance with level A of MIL-H-15424.

5.1.2 Level C. Preservation and packaging which will afford adequate protection against corrosion, deterioration, and damage during shipment from supply source to the first receiving activity for immediate use. (vendor to user)

5.2 Packing.

5.2.1 Level A. Level A packing shall be in accordance with level A of MIL-H-15424.

5.2.2 Level B. Level B packing shall be in accordance with level B of MIL-H-15424.

5.2.3 Level C. Packing which will afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use.

5.3 Marking.

5.3.1 Military agencies. In addition to any special marking required by the contract or order (see 6.1), shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2 Civil agencies. In addition to any special marking required by the contract or order (see 6.1), interior and exterior shipping containers shall be marked in accordance with Fed. Std. No. 123.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Levels of preservation, packaging and packing required (see section 5).
(c) Special marking, if required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37
Check the source to verify that this is the current version before use.