
MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE, (FOR MIL-C-81511 SERIES 1 CONNECTORS)

INACTIVE FOR NEW DESIGN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contacts described herein shall consist of this specification sheet and the latest issue of MIL-C-39029.

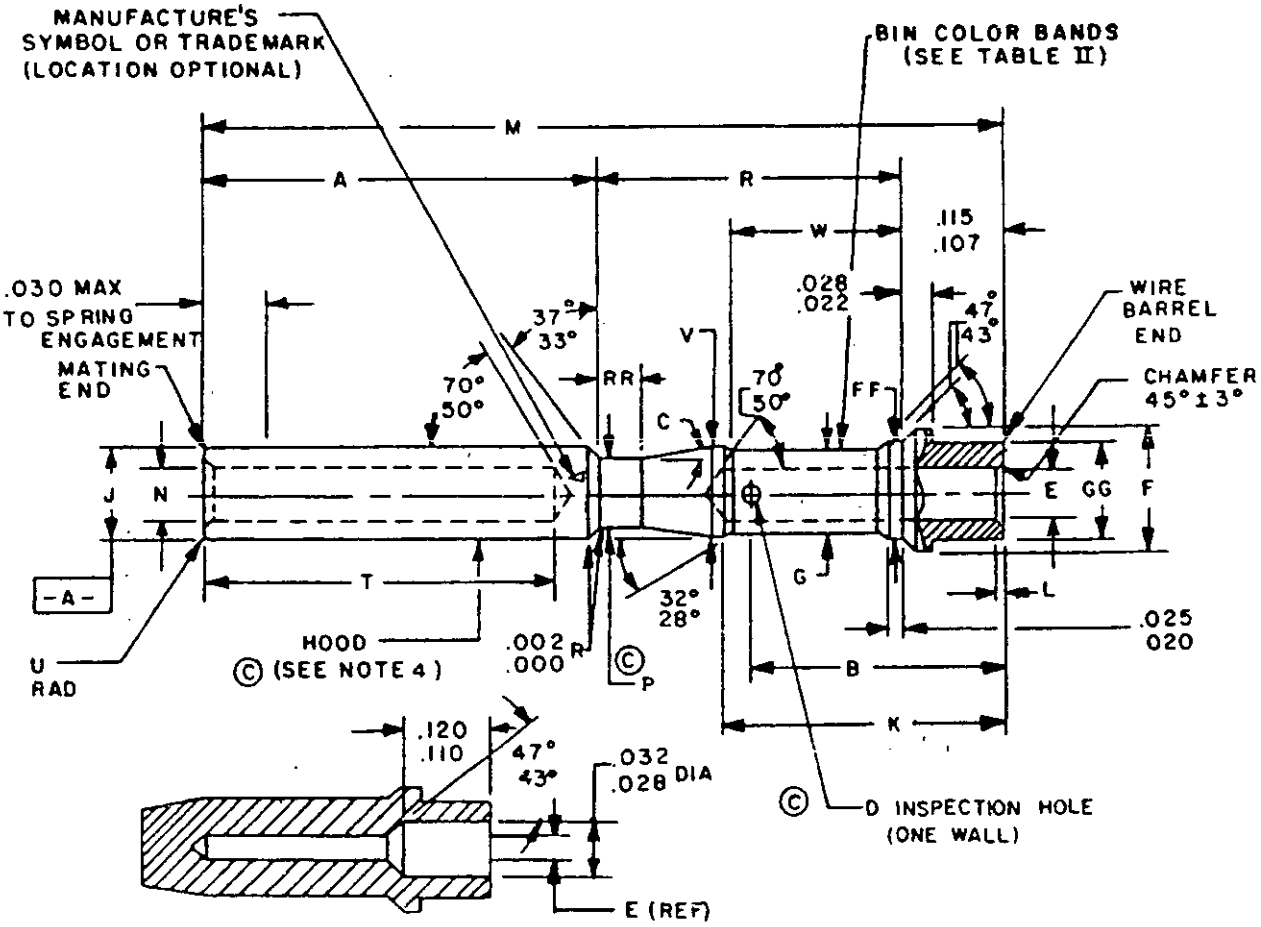

OPTIONAL WIRE BARREL FOR - 262

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses for overall length and diameter only.
© 4. Hood must butt against contact body.

© FIGURE 1. Connector contact.

© denotes changes

AMSC N/A

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:35Z
Check the source to verify that this is the current version before use.

Dimensions.

BIN code	A	B	C (DEG)	D DIA	E DIA	F DIA	FF DIA	G DIA	GG DIA	J DIA	K
262		.201	8	.022	.020 .018	.064 (1.63)	N/A	.0545	.050	.051	.235
264		.190	7	.018	.037 .035	.062 (1.57)		.052	.048	.049	.215
266	.686 .674	.252 .241			.050 .048	.103 (2.62) .100 (2.54)		.078 .075	.078 .076	.078 .076	.276 .256
268		.257	11 10	.032 .026	.068 .066	.133 (3.38) .130 (3.30)	.113 .110	.105 .101	.103 .101	.113 .110	.286 .266
270		.246			.102 .098	.190 (4.83) .187 (4.75)	.161 .158	.152 .148	.158 .155	.161 .158	.296 .276

©

BIN code	L	M (REF)	N MIN DIA ONLY	P DIA	R	RR	T	U RAD	V DIA	W	APPROX. WEIGHT (LBS)
262		1.043 (26.49)	.028	.039	.254		.220	.006	N/A		.00055
264				.036	.249		.170	.004			.00049
266	.006 .003		.0415	.065 .062		.040 .035	.320	.009 .007	.0805 .078	.120 .114	.00107
268		1.048 (26.62)	.064	.099 .096	.259 .254		.270	.012 .009	N/A	N/A	.00210
270	.010 .005		.0955	.145 .142			.270 .250	.017 .013			.00447

© FIGURE 1. Connector contact - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure 1 and table I.

Tools: See table II.

Vibration: Method 2005 of MIL-STD-1344, test condition IV. Exceptions specified in MIL-C-81511 shall also apply.

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition A. Exceptions specified in MIL-C-81511 shall also apply.

© Mating contact: MIL-C-39029/47 and MIL-C-39029/18.

NOTE: For MIL-C-81511 connectors, series 1 is intermateable with series 3 and series 2 is intermateable with series 4. The respective contacts for these connectors are required to be intermateable but are not interchangable.

© QPL evaluating activity: Naval Avionics Center, Code B-714, Indianapolis, Indiana 46218.

Military part number: See table III.

TABLE I. Design characteristics.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
262	Red	Blue	Red	23	28	A	B
264	Red	Blue	Yellow	23	22	A	B
266	Red	Blue	Blue	20	20	A	B
268	Red	Blue	Gray	16	16	A	B
270	Red	Violet	Black	12	12	A	B

© TABLE II. Tools.

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool
262	M22520/2-01	M22520/2-03	M81969/2-01	M81969/3-01
264	M22520/2-01	M22520/2-03	M81969/2-01	M81969/3-01
266	M22520/1-01 M22520/7-01	M22520/1-08 Red M22520/7-09	M81969/2-02	M81969/3-02
268	M22520/1-01 M22520/7-01	M22520/1-09 Blue M22520/7-10	M81969/2-03	M81969/3-03
270	M22520/1-01	M22520/1-09 Yellow	M81969/2-04	M81969/3-04

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:35Z
Check the source to verify that this is the current version before use.

TABLE III. Military part number.

BIN code	Military part number	Supersedes
262	M39029/33-262	M39029/33-261 MS3343A23-28 MS3343B23-28
264	M39029/33-264	M39029/33-263 MS3343A23-22 MS3343B23-22
266	M39029/33-266	M39029/33-265 MS3343A20-20 MS3343B20-20
268	M39029/33-268	M39029/33-267 MS3343A16-16 MS3343B16-16
270	M39029/33-270	M39029/33-269 MS3343A12-12 MS3343B12-12

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Navy - EC, MC, SH, TD
Air Force - 99
DLA - ES

User activity:
Navy - OS

Agent:
DLA - ES

Preparing activity:
Navy - AS

(Project 5935-3462-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:35Z
Check the source to verify that this is the current version before use.