
MS9176 (ASG)

FED. SUP CLASS 5340

MARK E10 ON SIZES -01 THRU -14, PART NUMBER ON SIZES -15 AND LARGER AND MANUFACTURERS IDENTIFICATION PER AS 478, CLASS 6 OR 7A

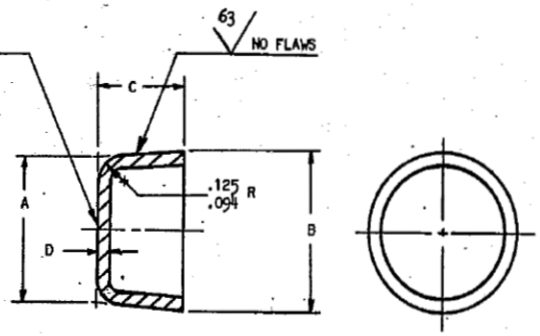

PART NO.	NOMINAL PLUG DIA	A DIA		B DIA		C		D		APPROX WEIGHT LB/100
		MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
MS9176-01	.281	.271	.281	.286	.289	.156	.188	.030	.040	0.160
MS9176-02	.312	.302	.312	.317	.320	.156	.188	.030	.040	0.185
MS9176-03	.344	.334	.344	.349	.352	.156	.188	.030	.040	0.213
MS9176-04	.375	.365	.375	.381	.384	.220	.260	.045	.055	0.422
MS9176-05	.406	.396	.406	.412	.415	.220	.260	.045	.055	0.476
MS9176-06	.438	.428	.438	.444	.447	.220	.260	.045	.055	0.529
MS9176-07	.469	.459	.469	.475	.478	.220	.260	.045	.055	0.587
MS9176-08	.500	.490	.500	.506	.509	.360	.400	.045	.055	0.937
MS9176-09	.531	.521	.531	.537	.540	.360	.400	.045	.055	1.005
MS9176-10	.562	.552	.562	.568	.571	.360	.400	.045	.055	1.064
MS9176-11	.594	.584	.594	.600	.603	.360	.400	.045	.055	1.117
MS9176-12	.625	.615	.625	.631	.634	.360	.400	.045	.055	1.270
MS9176-13	.656	.646	.656	.662	.665	.360	.400	.045	.055	1.355
MS9176-14	.688	.678	.688	.694	.697	.360	.400	.045	.055	1.444
MS9176-15	.719	.709	.719	.725	.728	.360	.400	.045	.055	1.540
MS9176-16	.750	.740	.750	.756	.759	.360	.400	.045	.055	1.640
MS9176-17	.812	.802	.812	.818	.821	.480	.520	.045	.055	2.250
MS9176-18	.875	.865	.875	.881	.884	.480	.520	.045	.055	2.465
MS9176-19	.938	.928	.938	.944	.947	.480	.520	.045	.055	2.743
MS9176-20	1.000	.990	1.000	1.006	1.009	.480	.520	.045	.055	3.000
MS9176-21	1.062	1.052	1.062	1.069	1.073	.480	.520	.045	.055	3.230
MS9176-22	1.125	1.115	1.125	1.132	1.136	.480	.520	.045	.055	3.540
MS9176-23	1.188	1.178	1.188	1.195	1.199	.480	.520	.045	.055	3.850
MS9176-24	1.250	1.240	1.250	1.257	1.261	.480	.520	.045	.055	4.100
MS9176-25	1.312	1.302	1.312	1.319	1.323	.480	.520	.045	.055	4.330
MS9176-26	1.375	1.365	1.375	1.382	1.386	.480	.520	.045	.055	4.725
MS9176-27	1.438	1.428	1.438	1.445	1.449	.480	.520	.045	.055	5.040
MS9176-28	1.500	1.490	1.500	1.507	1.511	.480	.520	.045	.055	5.380
MS9176-29	1.625	1.615	1.625	1.633	1.637	.480	.520	.045	.055	6.030
MS9176-30	1.750	1.740	1.750	1.758	1.762	.480	.520	.045	.055	6.710
MS9176-31	1.875	1.865	1.875	1.883	1.887	.480	.520	.045	.055	7.900
MS9176-32	2.000	1.990	2.000	2.008	2.012	.480	.520	.045	.055	8.350

1. MATERIAL: STEEL, AMS 5040
2. MATERIAL CODE E10 PER AS 269
3. FINISH: BLACK OXIDE PER AMS 2485
4. SURFACE ROUGHNESS: AS 291. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES.
5. BREAK SHARP EDGES .003-.015
6. DIMENSIONS IN INCHES.
7. DO NOT USE UNASSIGNED PART NUMBERS

AMS AND AS ARE SAE PUBLICATIONS

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 2 Feb 62 - REVISED

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Department of the ____ and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF - AFSC Other Cust Navy - Wep	TITLE PLUG, EXPANSION - TAPERED, AMS 5040	MILITARY STANDARD MS9176 (ASG)
PROCUREMENT SPECIFICATION None	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT E 25-90-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.