MILITARY STANDARD

MIL-STD-1320-181
(NAVY)

6 APRIL 1977


TRUCKLOADING


DOLLY, TRANSFER MK 7
ON PLATFORM, TRANSPORT MK 9 MOD O
DOMESTIC UNIT LOAD

UNIT LOAD DATA

DIMENSIONS
- LENGTH.....266
- WIDTH..... 66 3/4
- HEIGHT..... 59

WEIGHT (APPROX) ..... 1980 LBS
CUBE ..... 606.2 CU FT
DOT HAZARD CLASSIFICATION ... NONE
UNIT LOAD DWG WR-53/820

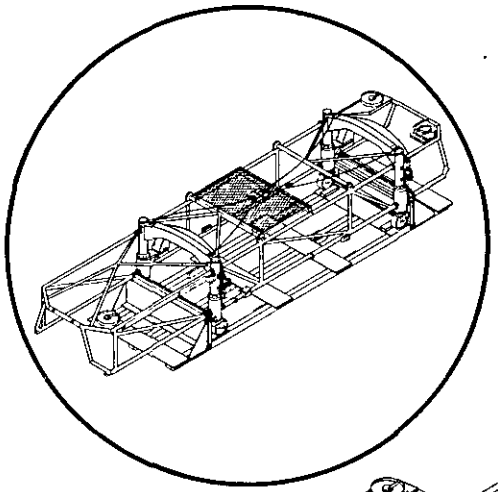

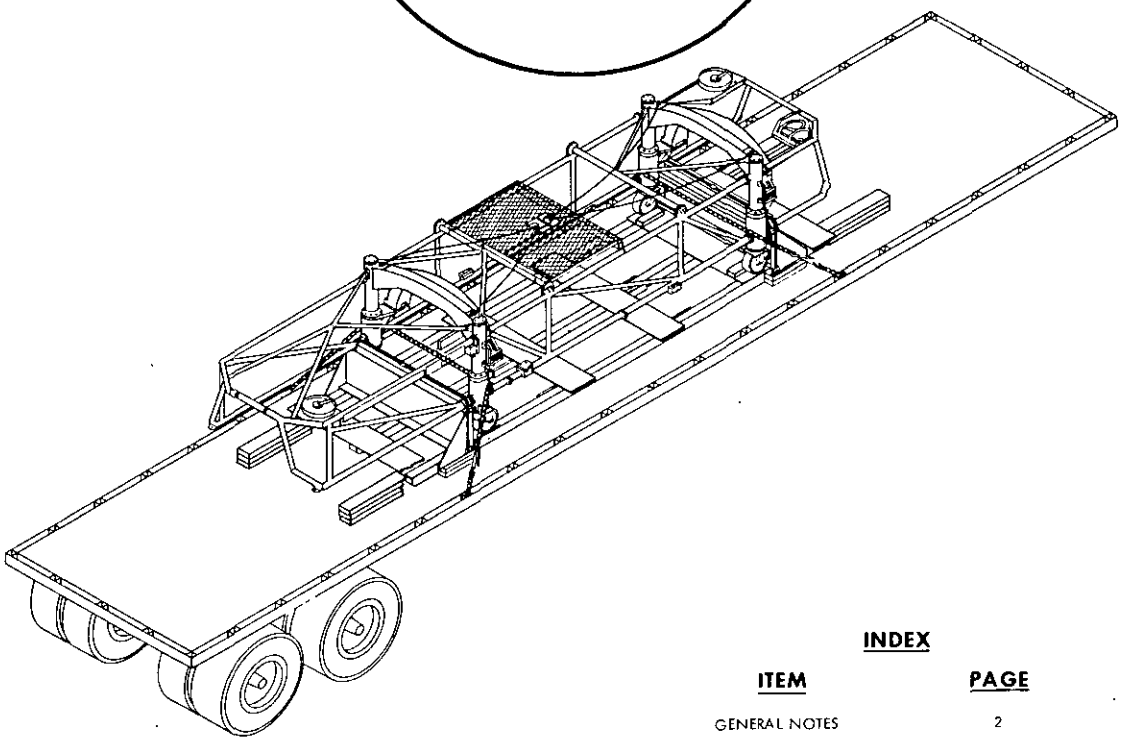

NOTES:
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

INDEX

ITEM	PAGE
GENERAL NOTES	2
LTL & FTL FLATBED	2 & 3

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

TECHNICAL DIRECTION AGENT (TDA) — DATE 3/25/77

SEASYSCOM BY DIRECTION — DATE 3/28/77

ORIGINATOR — DATE 3/29/77

NAVAL WEAPONS HANDLING CENTER
EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2022-03-23 23:44:02
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT PROVIDES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE MK 7 TRANSFER DOLLY WHEN THE DOLLY IS ON THE TRANSPORT PLATFORM MK 99 MOD 0 IN ACCORDANCE WITH WR-53/820.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR ALL LENGTHS OF FLATBED TRAILERS.
3. THE CHAIN FITTINGS AND LOADBINDERS SHALL MEET THE REQUIREMENTS OF MIL-STD-1320 (NAVY), PARAGRAPH 5.8.2.
4. PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS AND LOADBINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS AND LOADBINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOADBINDER.
5. BECAUSE OF THE LIGHT WEIGHT OF THE LOADED TRAILER, THE LOAD WEIGHT WILL NEVER EXCEED ANY WEIGHT RESTRICTION CRITERIA.
6. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO TRAILER IN AN ACCESSIBLE AREA.
7. APPLICABLE MATERIAL SPECIFICATIONS: DUNNAGE LUMBER, MM-L-751; NAILS, FF-N-105, TYPE II STYLE 10, COMMON BRIGHT.
8. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).


FTL AND LTL FLATBED TRAILERS (ALL LENGTHS)

1. EXERCISE CARE IN SECURING THE DOLLY TO THE FLATBED TRAILER WITH CHAIN AND LOADBINDERS. DO NOT USE A "CHEATERBAR" TO CLOSE THE LOADBINDER. THE CHAINS SHALL BE INSTALLED SO THAT THE LOADBINDERS CAN BE EASILY CLOSED BY HAND. SAFETY WIRE LOADBINDERS WITH 16 GAUGE SOFT ANNEALED IRON WIRE.
2. WHEN LOADED ON A 40 FT TRAILER, THE DOLLY MAY BE POSITIONED FORWARD OR AFT AS DESIRED TO ALLOW ROOM FOR OTHER LADING.
3. IN THOSE STATES PERMITTING DOUBLES, A DOLLY MAY BE LOADED ON A DOUBLES TRAILER AND TWO TRAILERS SHIPPED IN THE DOUBLE CONFIGURATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

TRUCKLOAD DATA

NO. OF DOLLYS 1
TRUCKLOAD WT. (APPROX.) ..... 1980 LBS

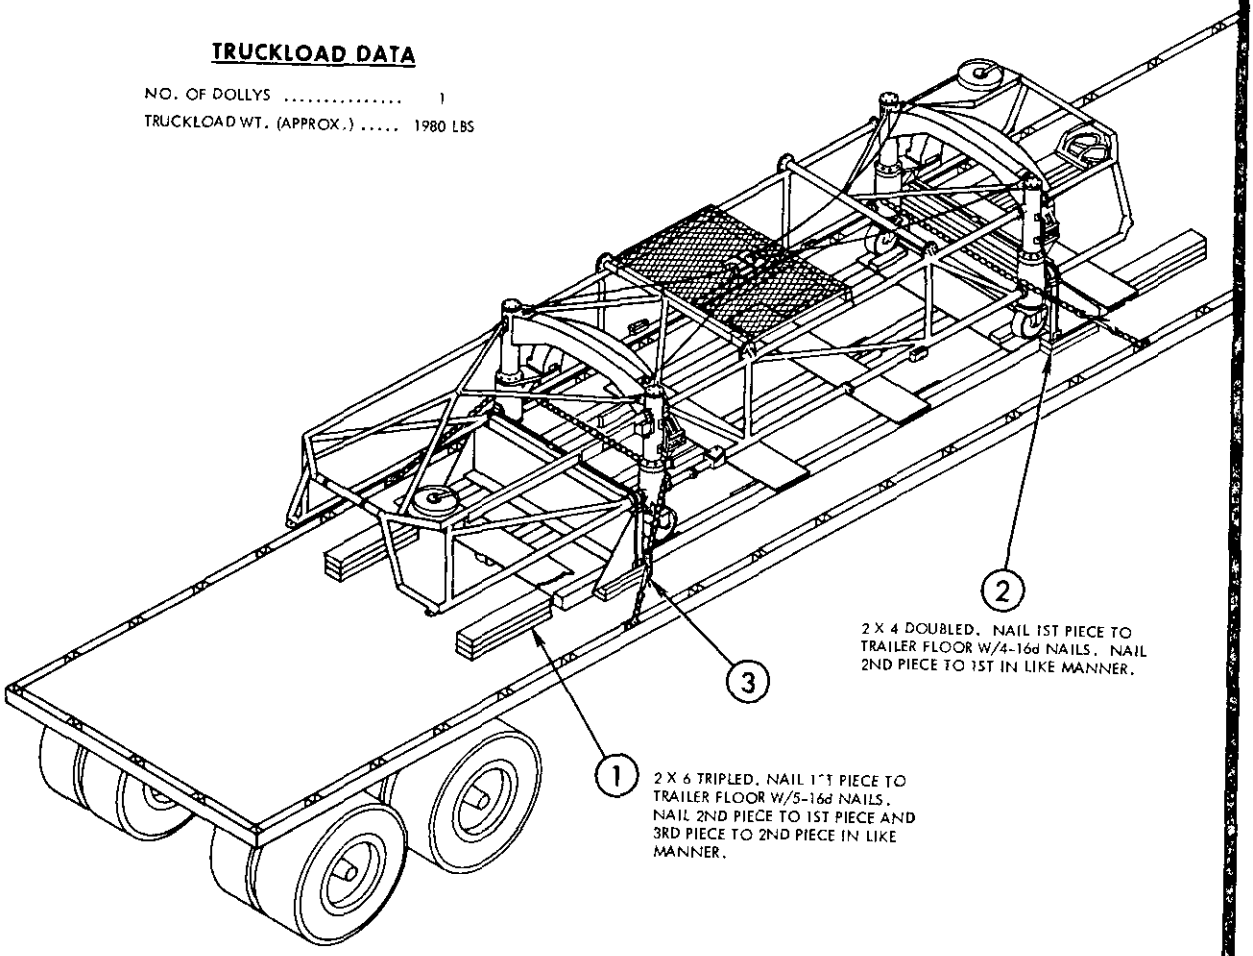

3	CHAIN & BINDER	5/16 OR 3/8	2	–	–	–
2	SLEEPER	2 X 4 X 18	8	SEE FIELD NOTE		
1	BACKUP CLEAT	2 X 6 X 30	12	SEE FIELD NOTE		

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	

LIST OF MATERIALS & NAILING DATA

TYPICAL FLATBED TRAILER LOAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23 23:43:32
Check the source to verify that this is the current version before use.