MILITARY STANDARD

MIL-STD-1322-833 (NAVY)

2 APRIL 1985

SUPERSEDING WR-53/833
16 MAY 1972


UNIT LOAD
FOR DOMESTIC AND OVERSEAS SHIPMENT
FAIRING, UNDERWATER MINE, MK 20 TYPE
FOR MINE MK 55

UNIT LOAD DATA DODIC/NALC ...R338


NUMBER OF ASSEMBLIES PER CONTAINER	1
NUMBER OF CONTAINERS PER UNIT LOAD	4
NUMBER OF ASSEMBLIES PER UNIT LOAD	4
GROSS WEIGHT OF ONE CONTAINER	160 LBS
WEIGHT OF PALLET	90 LBS
WEIGHT OF WOOD DUNNAGE	15 LBS
WEIGHT OF STRAPPING	5 LBS
GROSS WEIGHT OF UNIT LOAD	750 LBS △
CUBE	84.1 CU.FT.

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN 3
UNIT LOADS HIGH IN STORAGE

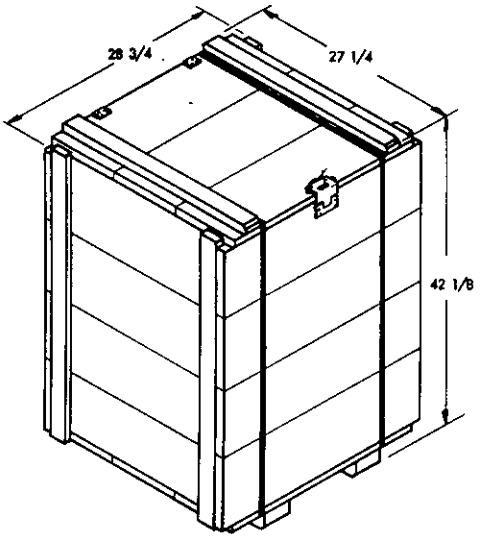

SHIPPING CONDITION
10001 - 2644586

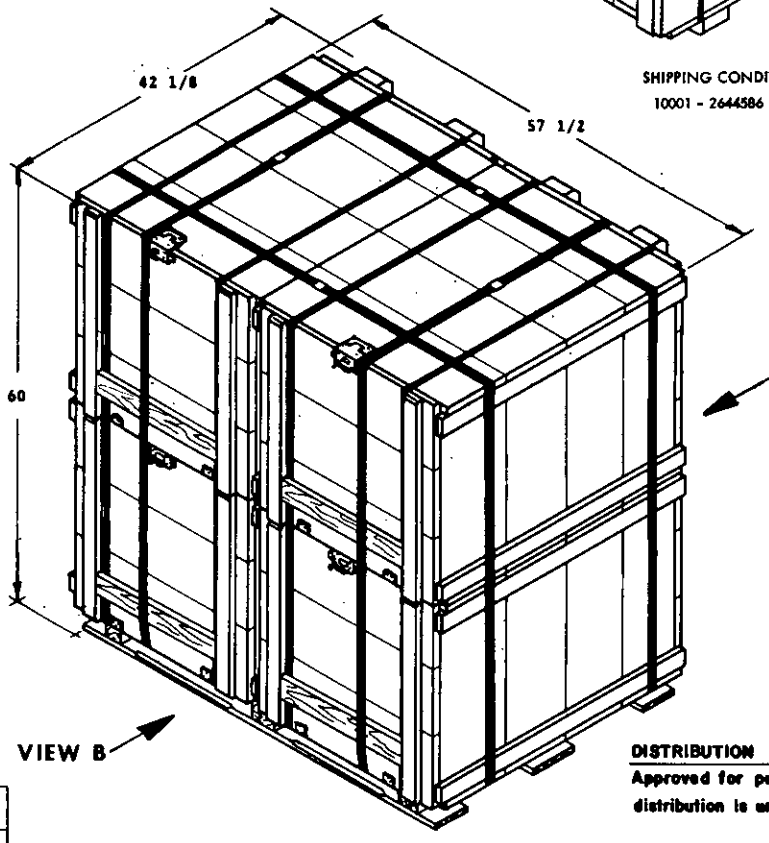

NOTES:
1. UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL - HDBK - 236 (NAVY) .

MIL STD	ROTATED CONTAINERS ON PALLET TO MAKE UNLOADING EASIER .
REV LTR	REVISION DESCRIPTION

DISTRIBUTION STATEMENT A
Approved for public release; distribution is unlimited.

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR DEPOT HANDLING AND STORAGE AND FOR SHIPMENT BY COMMON CARRIER

W.S. Gray NWHC 4/1/85
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE


JE Kelly 4/2/85
SIGNATURE SEASYSCOM BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1322 (NAVY)

ORIGINATOR 2 Apr 85
DATE


NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:55Z
Check the source to verify that this is the current version before use.

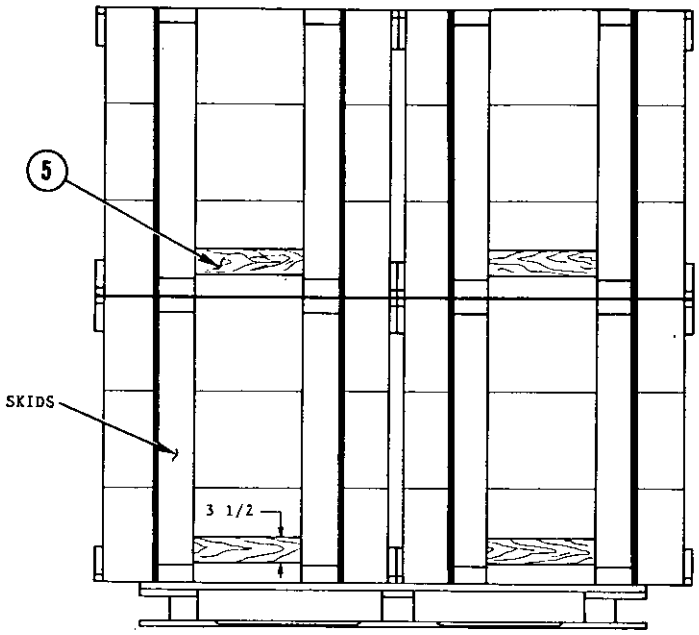

VIEW A

1. PLACE 4 CONTAINERS ON PALLET AS SHOWN ON PAGE 1.
2. CUT SKID GUARDS, ITEM 5 TO FIT SNUGLY BETWEEN SKIDS.
3. TAP SKID GUARDS INTO POSITION SO THAT THEY ARE FLUSH WITH THE SKIDS.

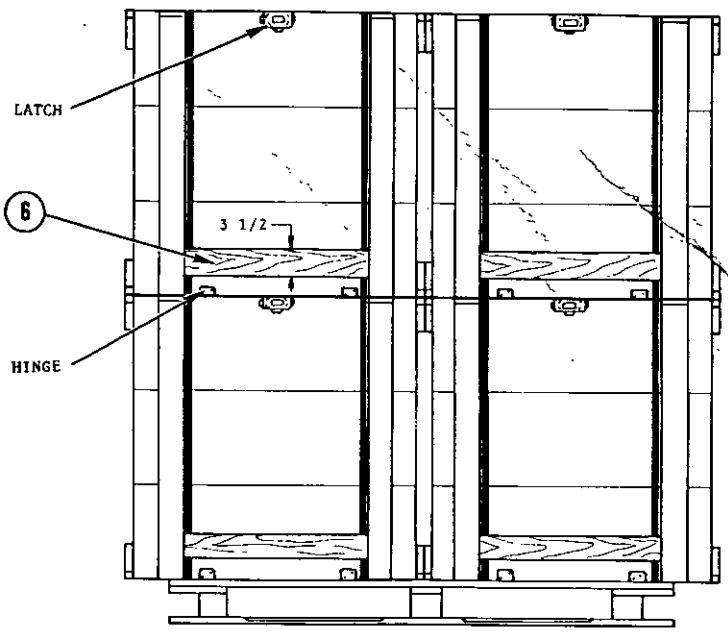

VIEW B

1. WITH CONTAINERS IN PLACE AND AFTER INSERTING SKID GUARDS, CUT COVER BATTENS TO FIT SNUGLY BETWEEN COVER CLEATS.
2. TAP COVER BATTENS INTO PLACE OVER THE 5/8 CONTAINER STRAPS AND FLUSH WITH COVER CLEATS.

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T23:55Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(A) THREAD STRAPPING, ITEM 2, BETWEEN DECK WIRES OF PALLET, ITEM 1, AS SHOWN IN DETAIL A.

(B) POSITION THE CONTAINERS ON THE PALLET DECK WITH EQUAL OVERHANGS ON BOTH SIDES AND ENDS.

(C) INSTALL THE SKID GUARDS, ITEM 5, AND THE COVER BATTENS, ITEM 6, AS SHOWN ON PAGE 2.


(D) POSITION STRAPPING, ITEM 3, UNDER THE PALLET DECK AND AROUND THE UNIT LOAD, TENSION AND DOUBLE NOTCH SEAL, ITEM 4.

(E) POSITION STRAPPING, ITEM 2, AROUND THE CONTAINERS, TENSION AND DOUBLE NOTCH SEAL.


(F) SECURE STRAPPING TO COVER BATTENS AND SKID GUARDS WITH STAPLES, ITEM 7.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1322.



DETAIL A

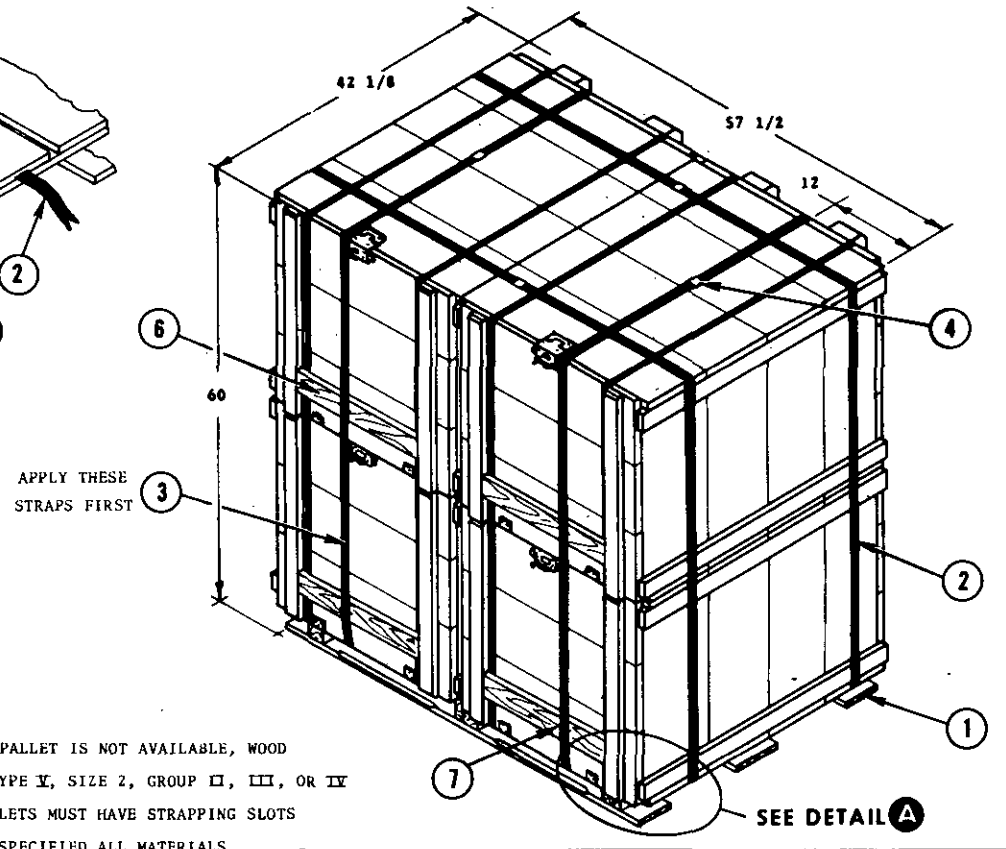

NOTES:

1. WHEN MIL-P-15011 PALLET IS NOT AVAILABLE, WOOD PALLET NN-P-71, TYPE I, SIZE 2, GROUP II, III, OR IV MAY BE USED. PALLETS MUST HAVE STRAPPING SLOTS
2. UNLESS OTHERWISE SPECIFIED ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1322.
3. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.

DEPALLETIZING PROCEDURE

(A) REMOVE STAPLES

(B) CUT AND REMOVE STRAPPING

(C) REMOVE BATTENS AND GUARDS

(D) REMOVE CONTAINERS

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
1 PER BATTEN	7	STAPLE	COM'L	3/4
4	6	COVER BATTEN	SEE NOTE 2	1 X 4 X TO FIT
4	5	SKID GUARD	SEE NOTE 2	3 X 4 X TO FIT
4	4	SEAL	SEE NOTE 2	3/4
2	3	STRAPPING, STEEL	SEE NOTES 2 & 3	3/4X.035X 17 FT 6
2	2	STRAPPING, STEEL	SEE NOTES 2 & 3	3/4X.035X 20 FT
1	1	PALLET, WOOD	MIL-P-15011,SEE STY1,CL1,NOTE 1	40 X 48 X 5 1/2

LIST OF MATERIALS

REVIEW ACTIVITY:
NAVY-OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N048)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1985 — 605-036/24503

Source: https://assist.dla.mil -- Downloaded: 2026-10-08T03:55Z
Check the source to verify that this is the current version before use.