# MILITARY STANDARD

## UNIT LOAD
## FOR UNDERWAY REPLENISHMENT
## 16 INCH 50 CAL. H.C./H.E. PROJECTILE MK 13 AND MK 19 IN PALLET ADAPTER MK 88 MOD 0

**MIL-STD-1323-149 A (NAVY)**

7 JUNE 1989

Superseding MIL-STD-1323-149
22 October 1982

### UNIT LOAD DATA


| | |
|---|---|
| NUMBER OF PROJECTILES PER UNIT LOAD | 2 |
| GROSS WEIGHT OF ONE PROJECTILE | 1900 LBS. |
| WEIGHT OF ADAPTERS (ESTIMATED) | 235 LBS. |
| WEIGHT OF PALLET | 94 LBS. |
| WEIGHT OF STRAPPING AND DUNNAGE | 25 LBS. |
| GROSS WEIGHT OF UNIT LOAD (ESTIMATED) | 4155 LBS. △ |
| CUBE | 42.6 CU. FT. |

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN
6 UNIT LOADS HIGH IN STORAGE

HAZARD CLASSIFICATION

| DODIC/NALC | DOT | CG |
|---|---|---|
| D875/D877 | CL. A | CL. VII |
| D874/D878/ D879/D880/ D882 | CL. A | CL. V |

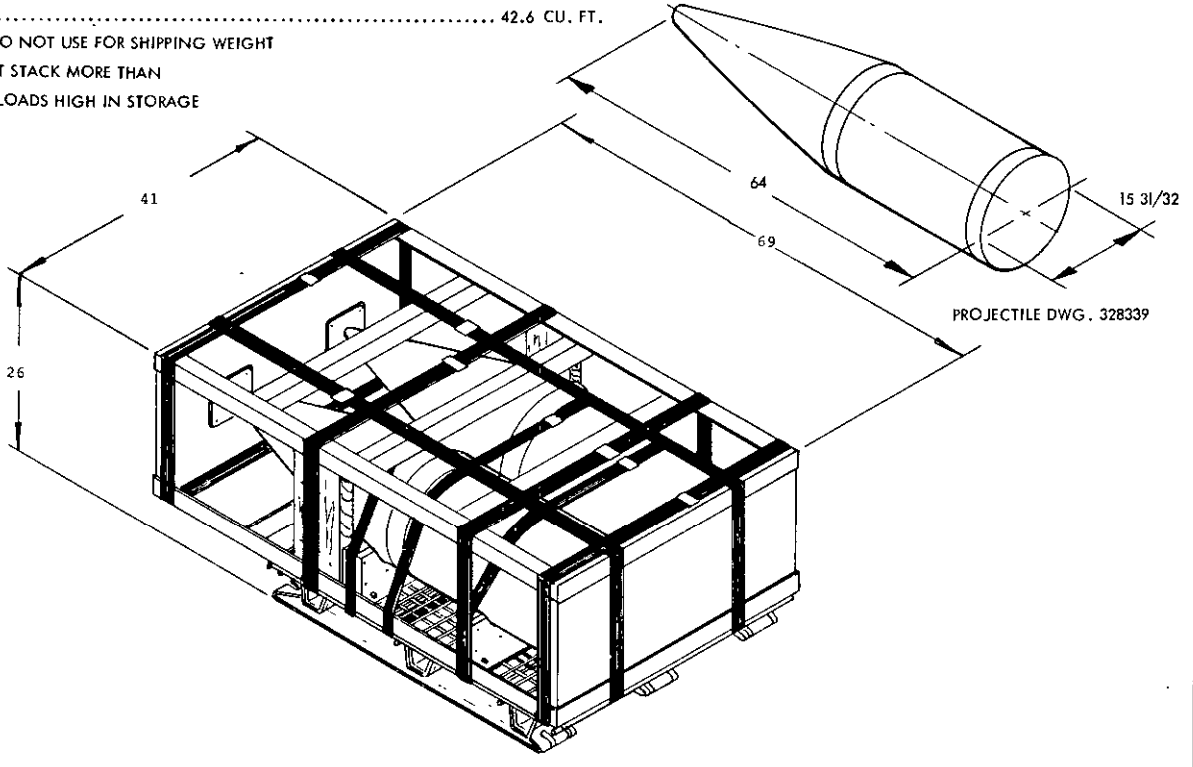


PROJECTILE DWG. 328339

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

| REV LTR | REVISION DESCRIPTION | DATE | TDA | SYSCOM |
|---|---|---|---|---|
| A | Added Hazard Classifications, | 6/7 | CPC | KLC |
| | | | APPROVAL | |

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

**THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR** SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

M.S. Gray, NWHC 10/26/82
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

L.E. Kelly 10/26/82
SIGNATURE SEASYSCOM BY DIRECTION DATE

**REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).**

ORIGINATOR S R Peters 10/26/82
DATE

WPNSTA EARLE, NEW JERSEY



Source: https://assist.dla.mil -- Downloaded: 2026-10-25 20:36Z
Check the source to verify that this is the current version before use.

# PALLETIZING PROCEDURE

(a) THREAD STRAPPING, ITEM 2, BETWEEN 5TH AND 6TH DECK WIRES OF PALLET, ITEM 1, AS SHOWN IN DETAIL A.

(b) POSITION BASE END OF THE BOTTOM FRAME, ITEM 6, 1" BEHIND THE END OF PALLET WITH EQUAL OVERHANG ON BOTH SIDES, ALIGN THE PROJECTILES ON CRADLE.

(c) POSITION THE END CAP AFT AND END CAP FWD, ITEM 7 AND 8, ON THE BOTTOM FRAME.

(d) POSITION STRAPPING, ITEM 3, UNDER PALLET DECK AROUND THE BOTTOM FRAME AND CRADLE AND OVER THE PROJECTILES, TENSION AND DOUBLE NOTCH SEAL, ITEM 5.

(e) PLACE 2 X 8 VERTICAL STRUTS, ITEM 10, AS SHOWN BELOW AND IN DETAIL B WITH CHAMFER AGAINST LOWER ANGLE FILLET AND STRUTS BUTT AGAINST FWD EDGE OF ANGLE.


(f) PLACE TOP FRAME, ITEM 9, OVER VERTICAL STRUTS AND UNIT LOAD AS SHOWN.

(g) POSITION STRAPPING, ITEM 4, UNDER PALLET DECK OR BOTTOM FRAME AND AROUND UNIT LOAD. LOCATE STRAPPING ON STRUT AS SHOWN IN DETAIL B, DRIVE IN STAPLES, ITEM 11 HALFWAY, TENSION AND DOUBLE NOTCH SEAL, THEN DRIVE IN STAPLES TO SECURE STRAPPING IN POSITION.

(h) POSITION STRAPPING, ITEM 2, AROUND THE UNIT LOAD, TENSION AND DOUBLE NOTCH SEAL.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323.

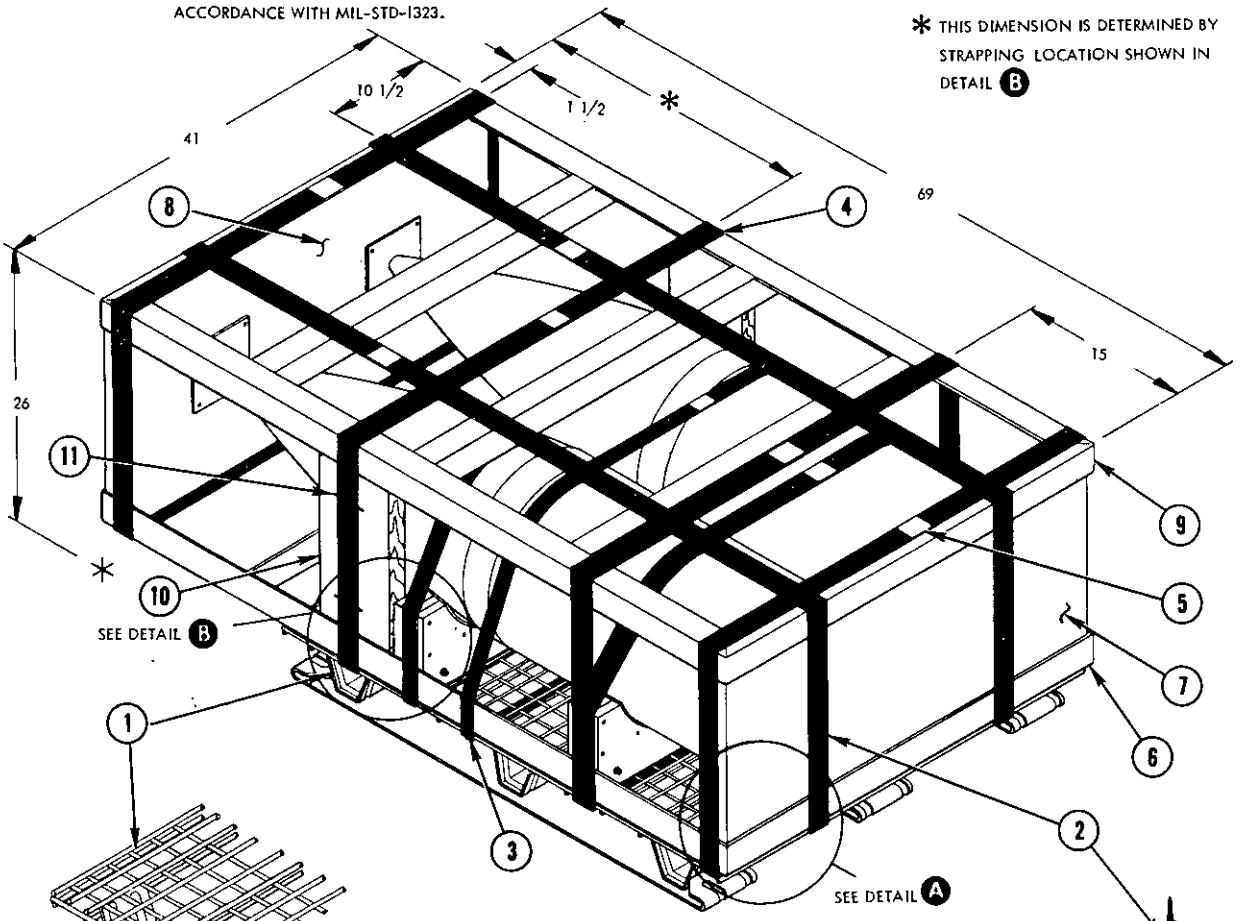


**WARNING**

LATERAL STRAPS MUST NOT BE PLACED OVER DECK WIRES SHOWN OR STRAPS MAY FAIL.

## DEPALLETIZING PROCEDURE


(a) CUT AND REMOVE STRAPPING, ITEMS 2 & 4

(b) REMOVE TOP FRAME AND END CAPS, AND VERTICAL STRUTS.

(c) CUT AND REMOVE STRAPPING, ITEM 3.

(d) REMOVE PROJECTILES.


(e) REMOVE BOTTOM FRAME.

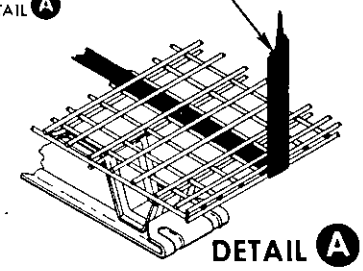

DETAIL A



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.

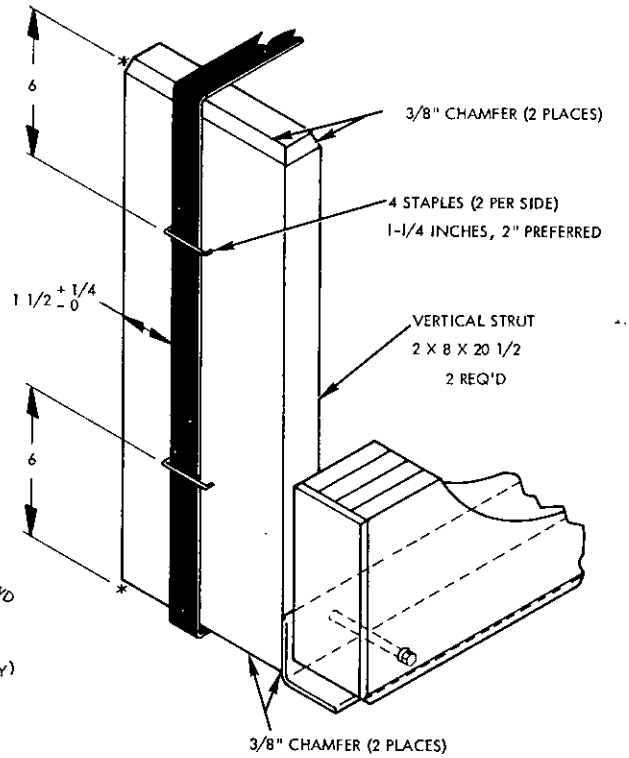


**DETAIL B**

(BOTTOM FRAME RIM OMITTED FOR CLARITY)

NOTE: STRAPPING DIMENSION IS SELECTED SO THAT WHEN STRUT IS INSTALLED STRAPPING CAN BE SATISFACTORILY PASSED UNDER PALLET DECK WITHOUT INTERFERENCE WITH DECK WIRES. SEE WARNING ON PG. 2.

* UNLESS OTHERWISE SPECIFIED, ALL MATERIALS WILL BE IN ACCORDANCE WITH MIL-STD-1323.

| REQ'D | ITEM | DESCRIPTION | MAT'L/DWG | DIMENSIONS |
|---|---|---|---|---|
| 4 | 11 | STAPLES | COM'L | FOR 2" STRAP PREFERRED FOR 1 1/4 " STRAP MAY BE USED |
| 2 | 10 | VERTICAL STRUT | SEE DETAIL B | 2 X 8 X 20 1/2 |
| 1 | 9 | TOP FRAME | 2642995 | - |
| 1 | 8 | END CAP FWD | 2643002 | - |
| 1 | 7 | END CAP AFT | 2643003 | - |
| 1 | 6 | BOTTOM FRAME ASSY. | 2643174 | - |
| 9 | 5 | SEAL | COM'L | 1 1/4 |
| 4 | 4 | STRAPPING | SEE* | 1 1/4 X .035 X 11 FT6 |
| 3 | 3 | STRAPPING | SEE* | 1 1/4 X .035 X 11 FT |
| 2 | 2 | STRAPPING | SEE* | 1 1/4 X .035 X 16 FT |
| 1 | 1 | PALLET, MK 3 MOD 0 | 564200 | 40 X 48 X 4 3/4 |

## LIST OF MATERIALS

REVIEW ACTIVITY:

NAVY-OS

PREPARING ACTIVITY:

NAVY-OS

(PROJECT NO. 8140-N831)



☆ U.S. GOVERNMENT PRINTING OFFICE 1989: - 604-033/13851

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.