MILITARY STANDARD

MIL-STD-1323-404
(NAVY)
15 MAY 1997

UNIT LOAD
FOR UNDERWAY REPLENISHMENT

NULKA ELECTRONIC DECOY CARTRIDGE (EDC)
MK 234 MODS 0 AND 1
IN CONTAINER, SHIPPING AND STORAGE,
MK 779 MOD 0


UNIT LOAD DATA

CONTAINER DIMENSIONS:	SINGLE	2-PACK	4-PACK
LENGTH	103.66	103.66	103.66
WIDTH	17.24	17.24	34.48
HEIGHT	18.66	37.32	37.32
NUMBER OF EDC'S PER CONTAINER	1	1	1
NUMBER OF CONTAINERS PER UNIT LOAD	1	2	4
NUMBER OF EDC'S PER UNIT LOAD	1	2	4
WEIGHT OF STEEL STRAPPING	0	2 LBS	9 LBS
GROSS WEIGHT ■	324 LBS	650 LBS	1,305 LBS
CUBE	19.30 CU FT	38.60 CU FT	77.20 CU FT

■ DO NOT USE FOR SHIPPING WEIGHT.

FOR HAZARD CLASSIFICATION SEE
SW020-AC-SAF-010/020/030.

FOR UNIT LOAD QUALIFICATION
SEE NWSE TEST REPORT NO. 97012.

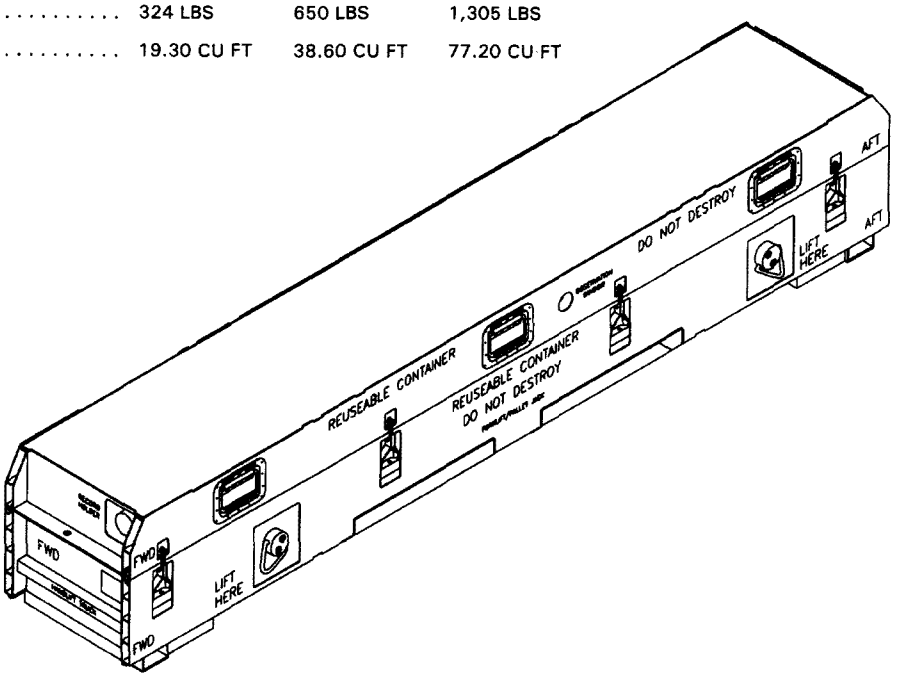

AMSC NO.-NA

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING, AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236.

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED.

REV	REVISION DESCRIPTION	DATE	TDA	SYSCOM

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE, AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

SIGNATURE — TDA, WPNSTA EARLE — DATE 16 May 97

5/19/97

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR 5/19/97
DATE

NAVAL WEAPONS STATION EARLE
COLTS NECK, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.


UNITIZING PROCEDURE FOR 2 CONTAINERS.

(A) STACK TWO CONTAINERS AS SHOWN. BE SURE TO ALIGN THE STACKING FEATURES.

(B) POSITION STRAPPING, ITEM 1, THROUGH FORK POCKETS OF LOWER CONTAINER AND OVER TOP OF UPPER CONTAINER. STRAPS SHALL BE POSITIONED IN SLOTS ON COVER OF UPPER CONTAINER AS SHOWN.

(C) TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 3.

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129-1 (NAVY).

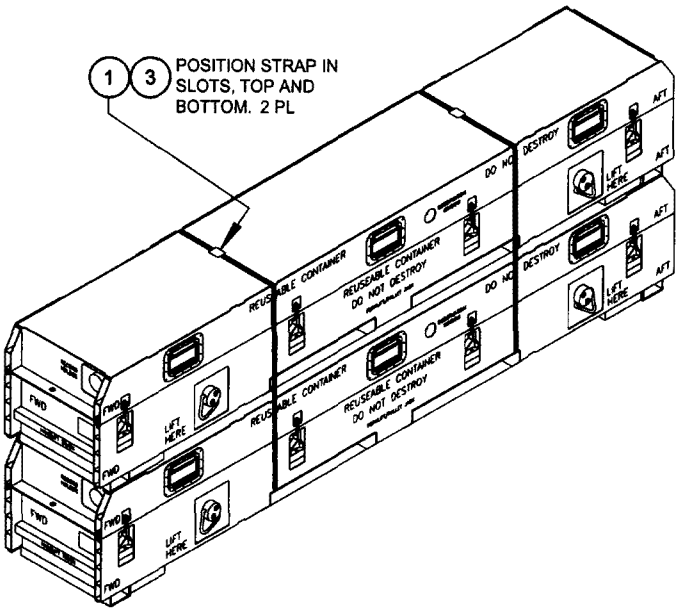


UNITIZING PROCEDURE FOR 4 CONTAINERS

(A) POSITION TWO 2-CONTAINER UNIT LOADS, UNITIZED AS DETAILED ABOVE, SIDE BY SIDE WITH SPACERS, ITEM 4, BETWEEN THEM TO PROTECT HANDLES.

(B) POSITION STRAPPING, ITEM 2, THROUGH SLOT UNDER BOTTOM OF LOWER CONTAINER AND THROUGH SLOT ON COVER OF UPPER CONTAINER AS SHOWN.

(C) TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 3.

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129-1 (NAVY).

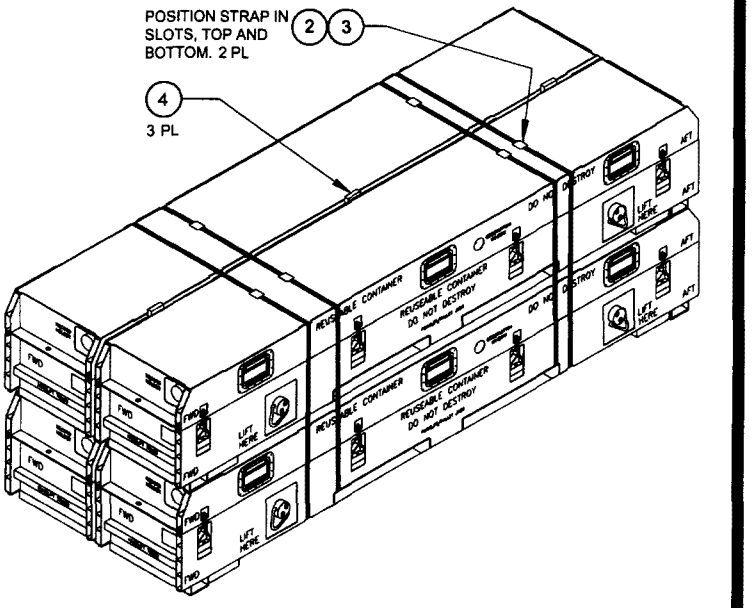

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1323.

DEUNITIZING PROCEDURE:

(A) CUT AND REMOVE ALL STRAPPING.

(B) SEPARATE CONTAINERS.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
3	4	SPACER	WOOD	1 X 3 X 37
6	3	STRAP SEAL	STEEL	3/4" SIZE
2	2	STRAPPING, 4-PACK	STEEL	3/4 X .035 X 14 FT
2	1	STRAPPING, 2-PACK	STEEL	3/4 X .035 X 11 FT

REVIEW ACTIVITY
NAVY-OS

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO. 8140-N1139)

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.