INCH-POUND

MIL-A-23595/3C(AS)
27 July 2000
SUPERSEDING
MIL-A-23595/3B(AS)
15 June 1988

MILITARY SPECIFICATION SHEET

AMPLIFIER ASSEMBLY, AUDIO FREQUENCY, AM 7067A/A

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the unit described herein shall consist of this specification and the latest issue of MIL-A-23595(AS).

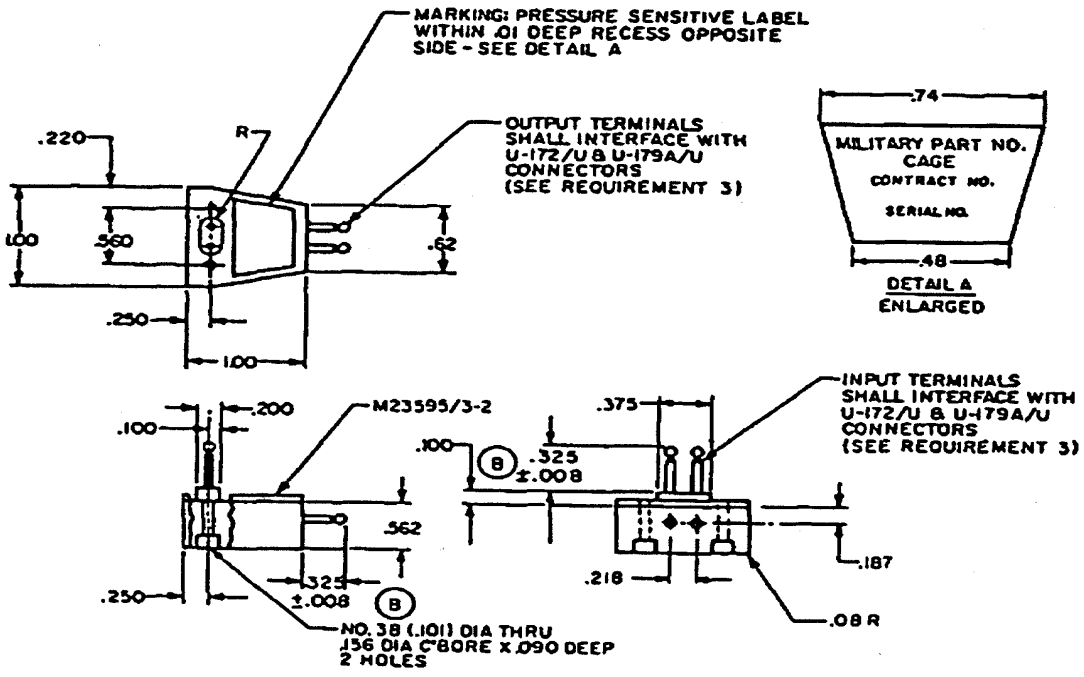

*FIGURE 1. Amplifier AM-7067A/A, PIN M23595/3-3.

AMSC N/A FSC 5831

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:19Z
Check the source to verify that this is the current version before use.

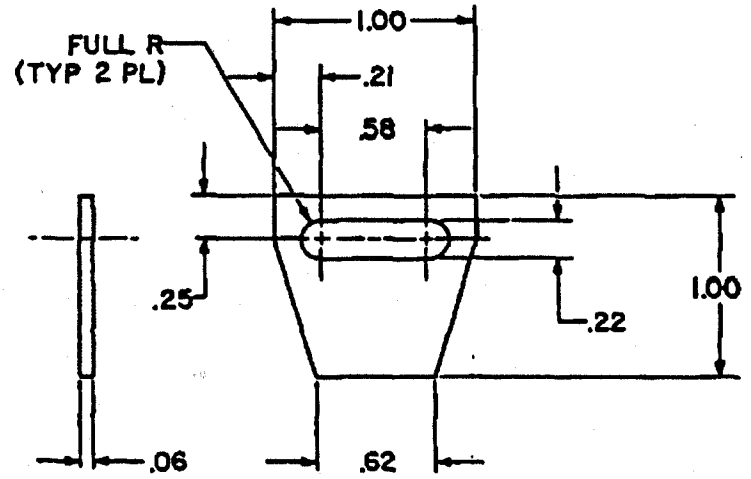

FIGURE 2. Gasket PIN M23595/3-2.

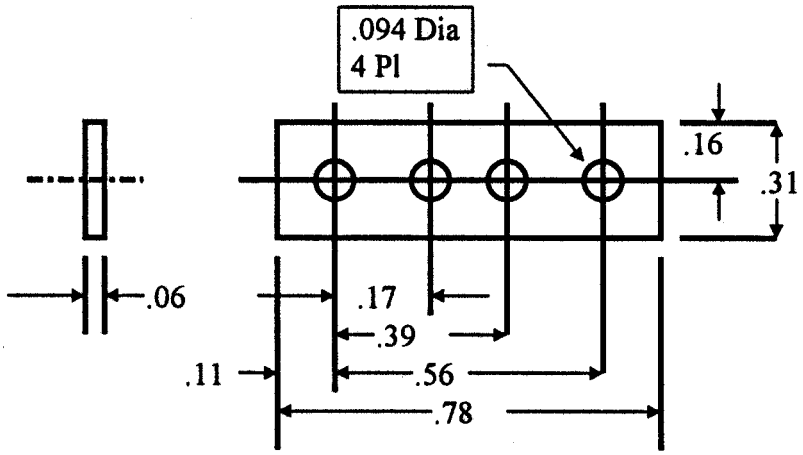

*FIGURE 3. Gasket PIN M23595/3-4.

REQUIREMENTS:

*1. The amplifier assembly PIN M23595/3-5 shall consist of the following:

1. 1 each-M23595/3-3 Amplifier
2. 1 each-M23595/3-2 Gasket
3. 2 each-NASM35275-210 Screw, Machine, Fillister Head (2-56 x 7/8 in)
4. 1 each-M23595/3-4 Gasket

2. The gaskets shall be silicone rubber commercial grade.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:19Z
Check the source to verify that this is the current version before use.

3. The output terminals shall contain two pins made in accordance with Air Force Drawing 57812664. The pins shall be arranged to form a U-173/U type connector with the dimensions as specified in Air Force Drawing 57B 12662.

*4. The screw mounting holes are to be constructed in such a manner that the amplifier shall not be damaged when the mounting screws are torqued to 3 in-lbs.

NOTES:

1. When connected to grounded source or measuring system, the red dot denotes the common lead.

2. Do not ground connections to the input and output at the same time.

3. All dimensions are in inches.

4. Tolerances are two place ±0.02 three place ±0.005.

5. This specification supersedes Naval Air Systems Command drawing 765AS287-1.

*6. PIN M23595/3-3 supersedes P/N M23595/3-1, and has been designed to eliminate EMI susceptibility which existed in P/N M23595/3-1.

Changes from previous issue. The margins of this amendment are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - AS

(Project No. 5831-N127)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:19Z
Check the source to verify that this is the current version before use.