DOD-B-24531/2(SH) METRIC
AMENDMENT-1
19 December 1977

MILITARY SPECIFICATION

BATTERY, STORAGE, SILVER-ZINC ALKALINE (EMERGENCY),

FOR DSRV: TYPE 25 V - 70 Ah (METRIC)

This amendment forms a part of Military Specification sheet DOD-B-24531/2(SH), dated 23 February 1976 and is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Table I, under "Rate ampere": Delete "7" and substitute "10".

Under "Mass": Add "Maximum 21.5 kilograms(dry)."

Add: "Zinc electrodes: Mercury shall not be used. A NAVSEC substitute will be specified."

PAGE 3

Figure 2: Delete and substitute the attached figure 2.


PAGE 4

Figure 3: Delete and substitute the attached figure 3.

Preparing activity:
Navy - SH
(Project 6140-N472-2)

FSC 6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:23Z
Check the source to verify that this is the current version before use.

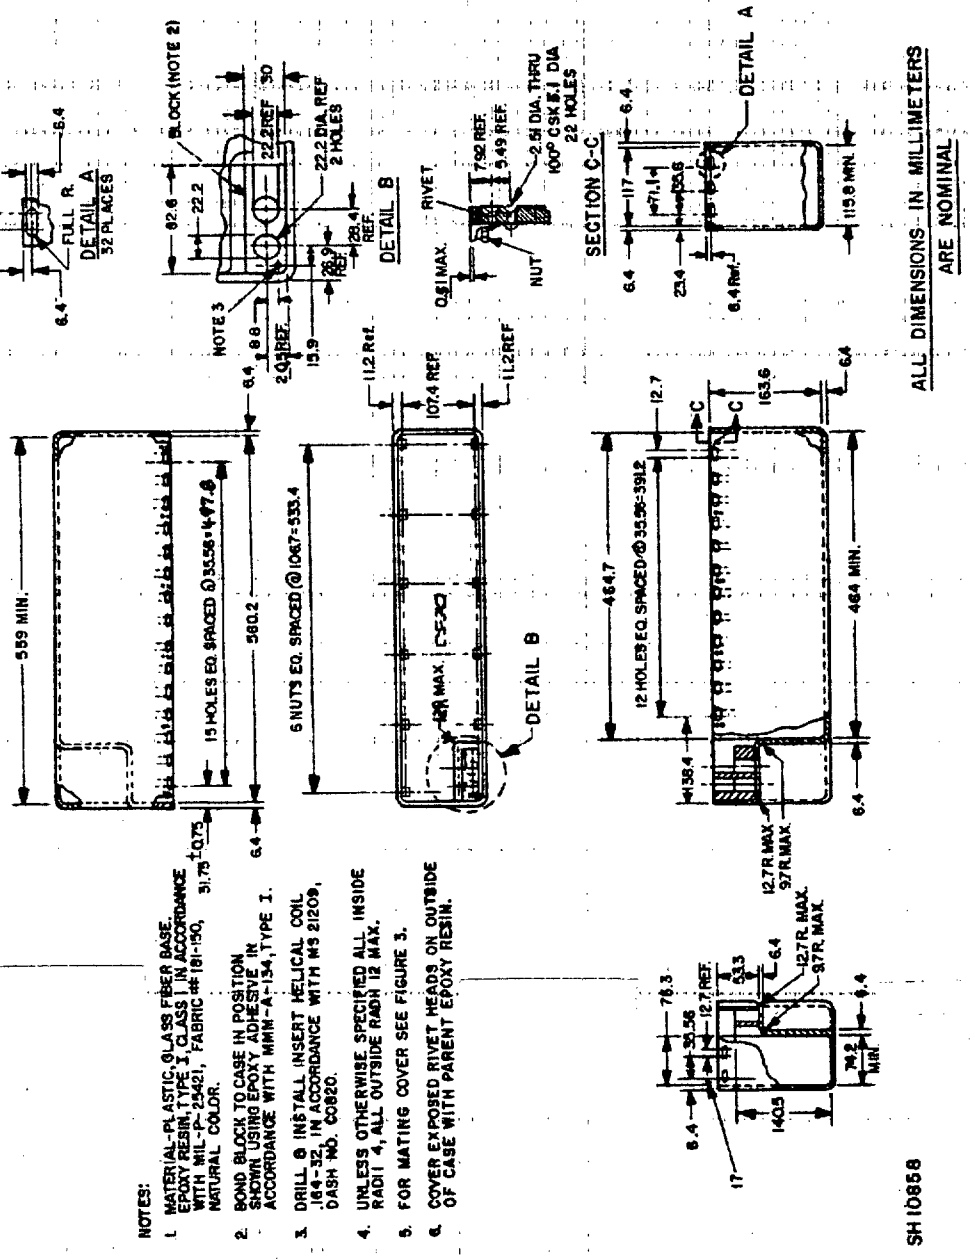

NOTES:


1. MATERIAL-PLASTIC, GLASS FIBER BASE, EPOXY RESIN, TYPE I, CLASS I IN ACCORDANCE WITH MIL-P-25421, FABRIC # 181-150, NATURAL COLOR.
2. BOND BLOCK TO CASE IN POSITION SHOWN USING EPOXY ADHESIVE IN ACCORDANCE WITH MMM-A-134, TYPE I.
3. DRILL Ø INSTALL INSERT HELICAL COIL .164-32, IN ACCORDANCE WITH MS 21209, DASH NO. C0820.
4. UNLESS OTHERWISE SPECIFIED ALL INSIDE RADII 4, ALL OUTSIDE RADII 12 MAX.
5. FOR MATING COVER SEE FIGURE 3.
6. COVER EXPOSED RIVET HEADS ON OUTSIDE OF CASE WITH PARENT EPOXY RESIN.

FIGURE 2. Battery case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:23Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL, PLASTIC SHEET, LAMINATED, GLASS FIBER BASE, EPOXY RESIN IN ACCORDANCE WITH MIL-P-18177, TYPE GEE, NATURAL COLOR.
2. 22.2 DIA. HOLES SHALL ALIGN WITH HOLES IN CASE AFTER ASSEMBLY OF CASE AND COVER.

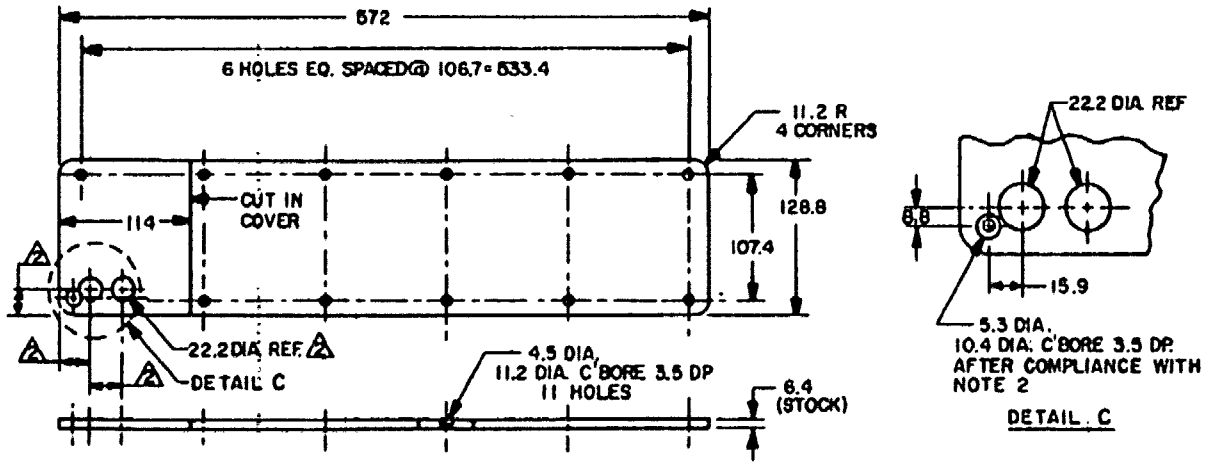

SH 10859

ALL DIMENSIONS IN MILLIMETERS ARE NOMINAL

FIGURE 3. Battery cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:23Z
Check the source to verify that this is the current version before use.