METRIC

DOD-B-24531/2(SH)
23 February 1976

MILITARY SPECIFICATION SHEET

BATTERY, STORAGE, SILVER-ZINC ALKALINE (EMERGENCY), FOR DSRV:

TYPE 25 V - 70 Ah (METRIC)

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the battery described herein shall consist of this document and the latest issue of DOD-B-24531.

REQUIREMENTS:

Electrical rating: The rating of each 17-cell battery shall be not less than that shown in table I.

Table I - Electrical rating.

Rate ampere (A)	Time hours (h)	Capacity ampere-hour (Ah)	Minimum battery voltage (V)	Minimum average cell voltage 1/ (V)	Minimum cell voltage (V)
7	10.0	70	22.0	1.45	1.30
30	2.0	60	22.0	1.45	1.30
80	0.7	56	18.0	1.35	1.10
300	1 sec	--	15.0	0.95	0.88

1/ The "average voltage" is defined as the average of voltage readings taken at 1/4-hour intervals, starting with the first reading taken between 1/2 and 1 minute after applying the load and including the cut-off voltage.

Life: 3000 Ah total output or 1 year, whichever occurs first, before the capacity drops below 70 percent of rated capacity.

Dimensions as shown on figure 1:

Mass: Maximum 25.5 kilograms (wet).

Terminals:

Size: 5/16-24 (two nuts per terminal post for each cell are required). Maximum height - 17 mm above cell cover.

Location: See view B-B of figure 1 and detail C of figure 3.

Case and cover: As shown on figures 2 and 3.

Cell and intercell connection layout: As shown on figure 4.

Preparing activity:
Navy - SH
(Project 6140-N422-2)

FSC 6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:23Z
Check the source to verify that this is the current version before use.

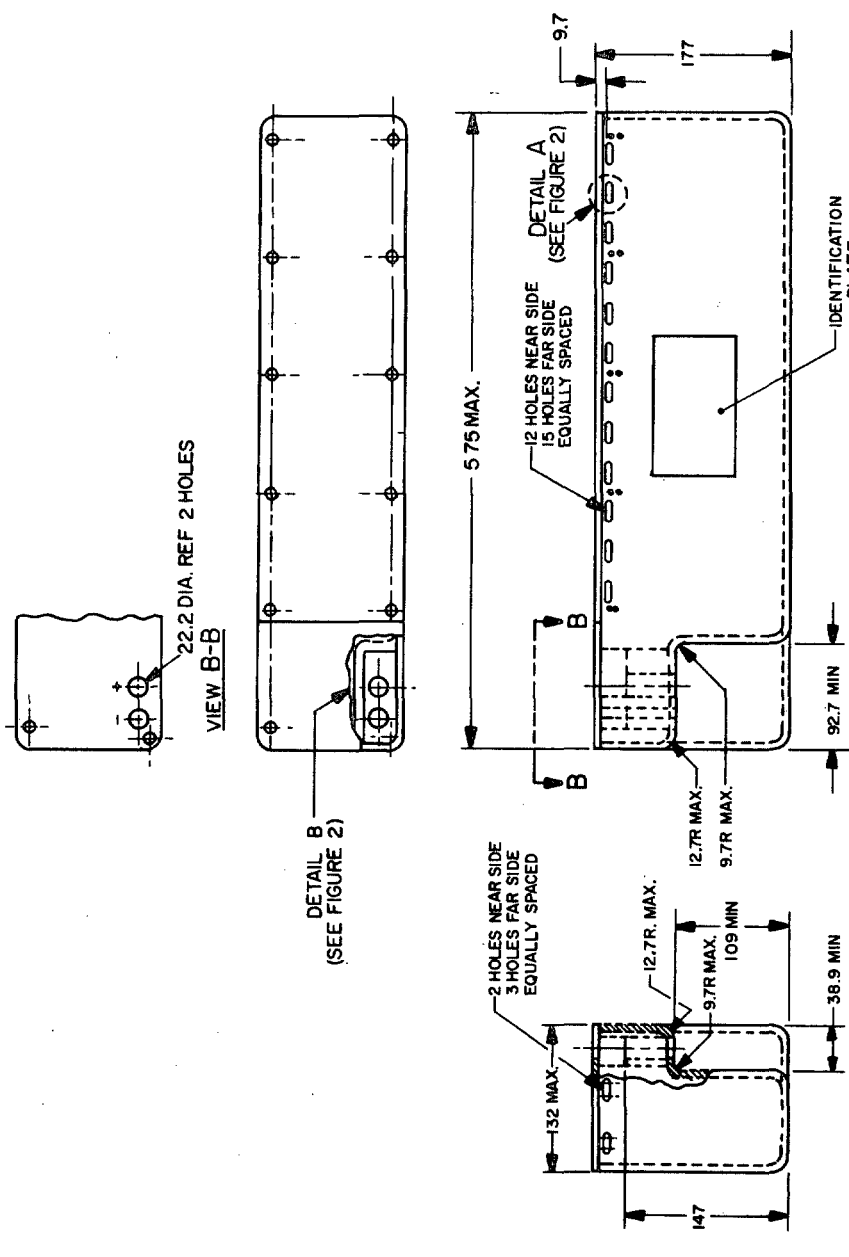


Figure 1 - Battery, type 25 V - 70 Ah.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:23Z
Check the source to verify that this is the current version before use.

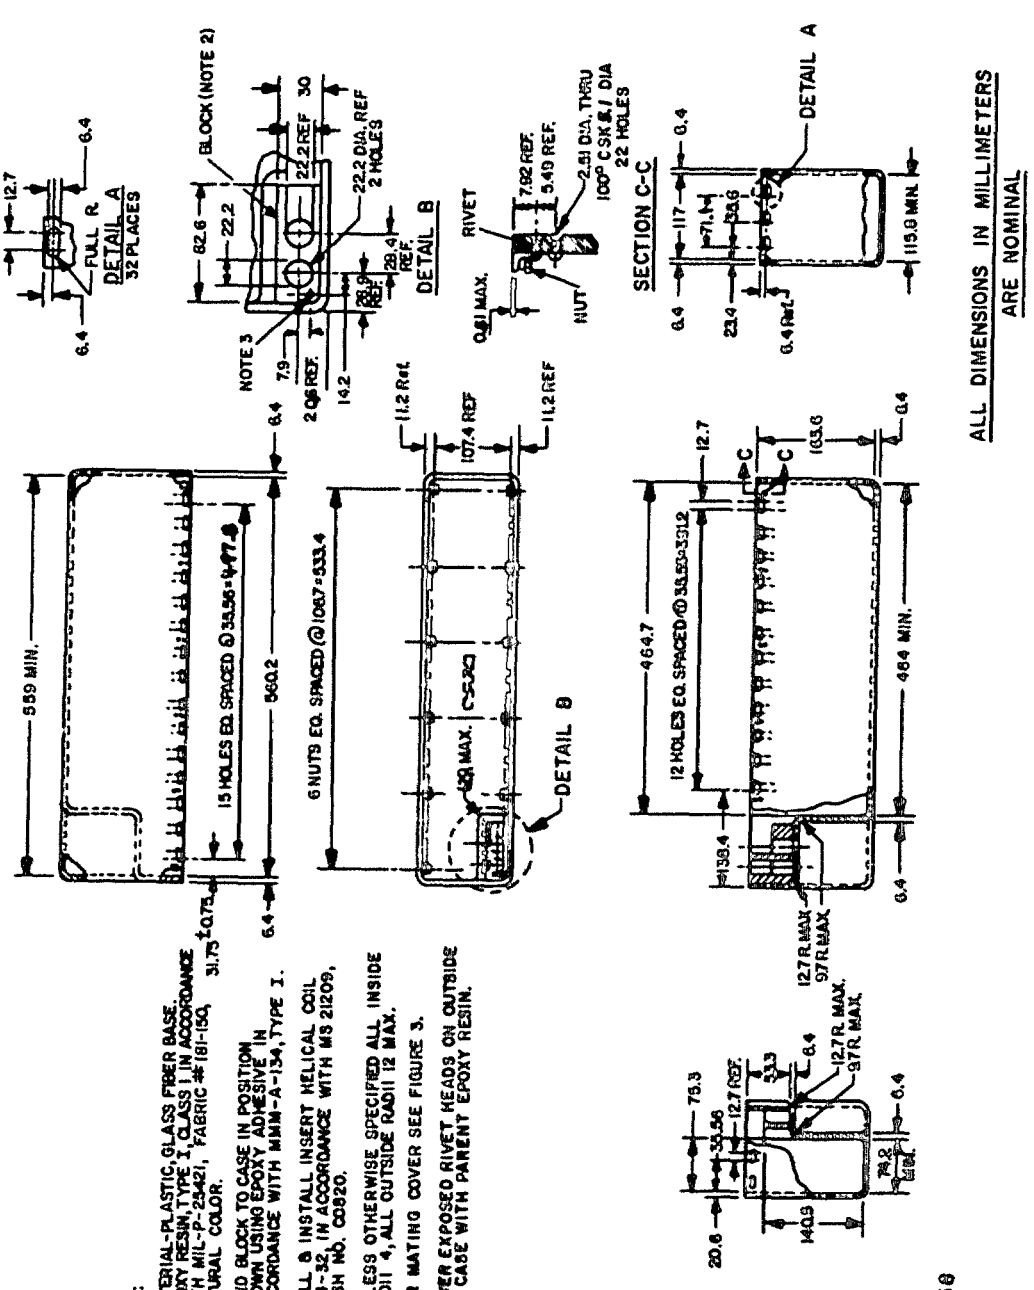


Figure 2 - Battery case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:
Check the source to verify that this is the current version befor


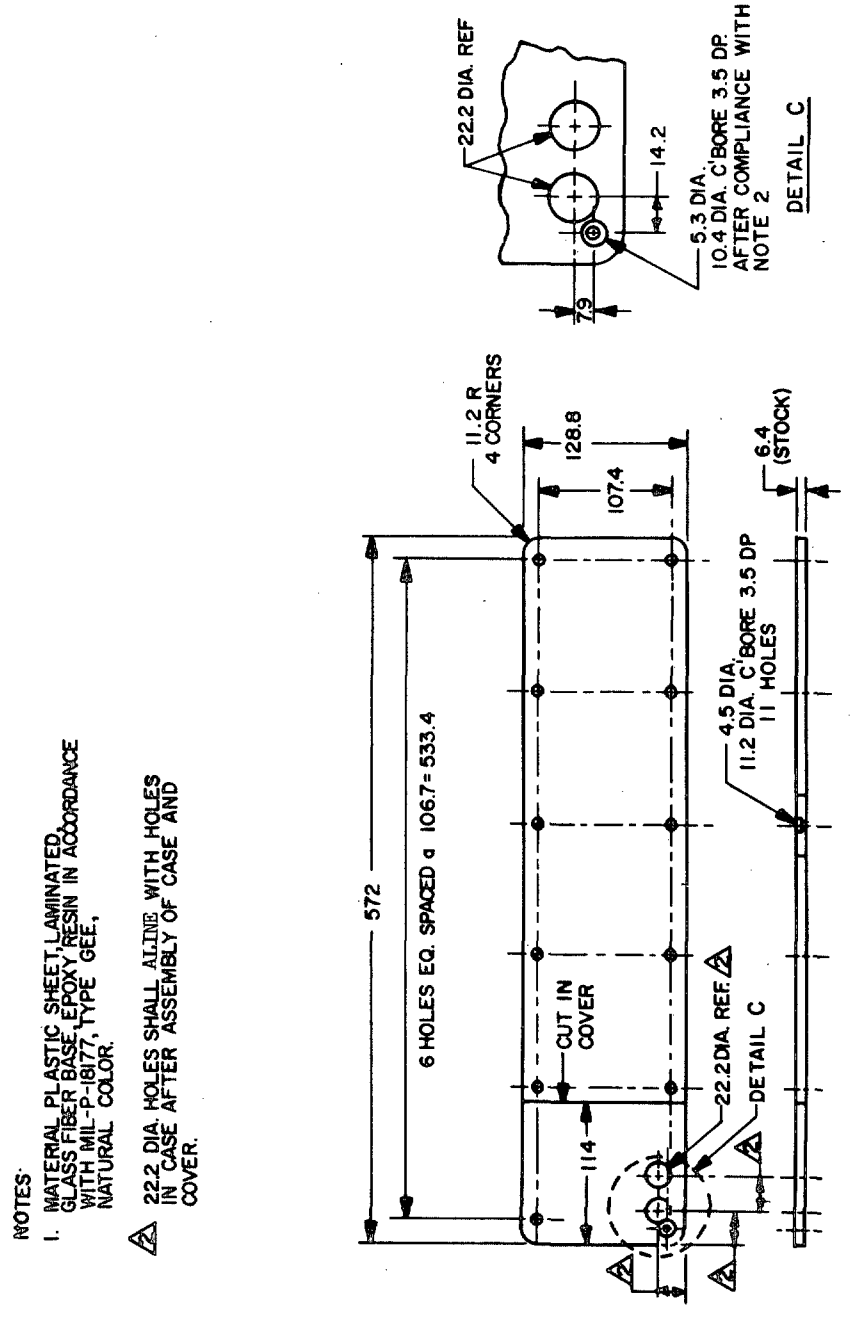


Figure 3 - Battery cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:23Z
Check the source to verify that this is the current version before use.

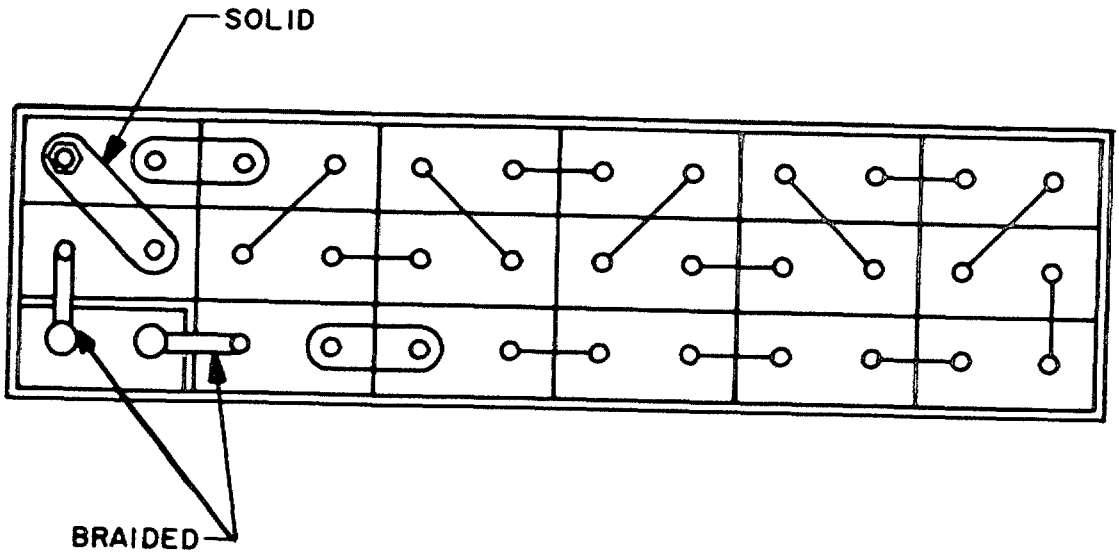

SCALE: NONE

SH 11014

Figure 4 - Cell and intercell connection layout.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:23Z
Check the source to verify that this is the current version before use.