INCH-POUND

A-A-55118

11 JANUARY 1993

COMMERCIAL ITEM DESCRIPTION

FOOTWEAR COVERS, RADIOACTIVE CONTAMINANTS PROTECTIVE

The General Service Administration has authorized the use of this Commercial Item Description in preference to MIL-F-82240D.

Abstract. This Commercial Item Description covers the requirements for one type and size of protective footwear cover fabricated from flexible vinyl chloride plastic film. The Footwear Covers are intended for the protection of military personnel working in the presence of low level radioactive material.

Salient Characteristics. The covers shall be manufactured by electronically heat sealing together the two profile sections of vinyl plastic at the sides and bottom, and die cutting to the proper size and shape. The heat seal shall be continuous along its entire length. The width of the fused zone shall be 3/32 inch ± 1/64 inch along the sides and bottom except at the top opening of the cover where the width of reinforcing fuse zone shall be 3/16 inch ± 1/16 inch for a distance of 3/4 to 1 inch (see figure 1).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8430

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Material. The basic material shall be plastic film, flexible, vinyl chloride and shall conform to type I, class 2 of L-P-375, 0.004 inch + 0.0001 - 0.0004 inches thick, except that the requirements for extraction in soapy water, volatility, resistance to weathering, cold crack, lacquer lifting, crocking and dimensional stability shall not apply. The color shall be yellow and acceptable to the approved sample.

Finished dimensions. The finished dimensions of the covers shall be as listed below for A,B,C AND D which refer to Figure 1. Measurements are expressed in inches and shall be taken with the footwear cover laid flat.

		Inches	
A	Length of foot	15-1/8 to 15-3/4	
B	Width of top opening	10-1/4 to 10-3/4	
C	Center height	17-1/8 to 18-1/8	
D	Choke width	10-1/4 to 10-3/4	1/

1/ Taken 10 inches from the bottom edge.

NOTE: Any inconsistencies between the commercial item description and the figure, the Commercial Item Description shall govern.

Workmanship. After completion, the finished footwear cover shall be thoroughly cleaned, and any cover having surface finish defects of the following: i.e., cracking, blistering, pitting, bubbling and permanent wrinkling. Any hole, cut, tear, rupture, burn, thin spots. Any repair patches or mends, and any excess material. Any imbedded foreign matter, open seam, inadequate heat seal and any dimensions that are not in accordance with this Commercial Item Description will be considered defects.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics and the requirements of this Commercial Item Description, and where certificates of compliance are submitted, the government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be provided for, under provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Examination. Lots of Footwear Covers, Radioactive, shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The inspection level for visual examination shall be II and the AQL 2.5. The sample unit is one pair .

Dimensional Examination. The finished Footwear Cover shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one pair; the inspection level shall be S-3 and the AQL shall be 2.5.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL shall be 2.5.

Examination	Defect
Material	Any component missing, damaged, not as specified.
Content	Number of covers per shipping container is more or less than required.
Mar Marking	Omitted, incorrect, illegible, of impro size, location, sequence or method of application.
Workmanship	Incomplete closure of container flaps, loose or inadequate strapping.
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Defects. The Footwear Cover shall be examined for the following defects: any hole, cut, tear, color not as specified; any spot or stain (outside); cracking, blistering, pitting, bubbling and permanent wrinkling. Any hole, cut, tear, rupture, burn, thin spots. Any repair patches or mends, and any excess material. Any imbedded foreign matter, open seam, inadequate heat seal and any dimensions that are not in accordance with this Commercial Item Description.

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

ASTM-D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Custodian:
Navy - NU
Air Force - 99

Review Activity:
Navy - SH
Air Force - 82
Air Force - 45

User Activity:
Navy - AS, OS
Coast Guard - CG

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8430-0410

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

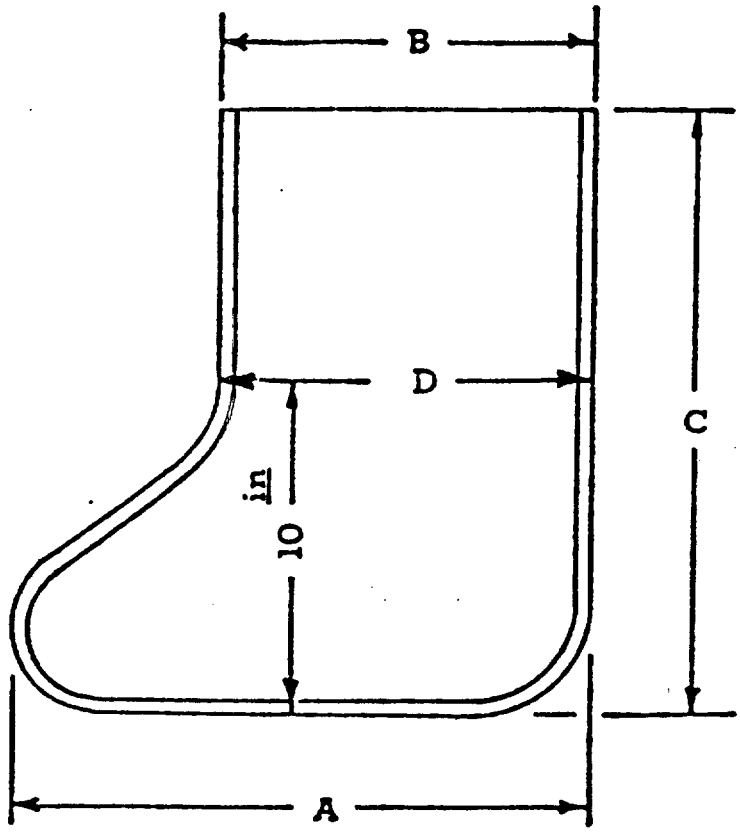


FIGURE 1

FOOTWEAR, COVER, RADIOACTIVE CONTAMINANTS, PROTECTIVE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-55118	2. DOCUMENT DATE (YYMMDD) 11 JANUARY 1993

3. DOCUMENT TITLE
FOOTWEAR COVERS, RADIOACTIVE CONTAMINATS PROTECTIVE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b. TELEPHONE *(Include Area Code)* (1) Commercial: 215-737-8105 (2) AUTOVON: 444-8105
c. ADDRESS *(Include Zip Code)* 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.