MILITARY SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING,

TYPES FHL17G1 AND FHL17G2

The complete requirements for acquiring the fuseholders described herein shall consist of this specification and the latest issue of MIL-F-19207.

INCHES	MM
.005	.13
.02	.51
.03	.76
.040	1.18
.09	2.29
.10	2.54
.11	2.79
.12	3.05
.20	5.05
.26	6.74
.28	7.15
.31	7.87
.34	8.64
.44	11.18
.50	12.70
.515	13.08
.53	13.46
.560	14.22
.569	14.45
.570	14.48
.575	14.52
.625	15.88
.635	16.13
.81	20.57
.82	20.83
.84	21.34
.94	23.88
1.19	30.23
2.38	60.45
2.84	72.14

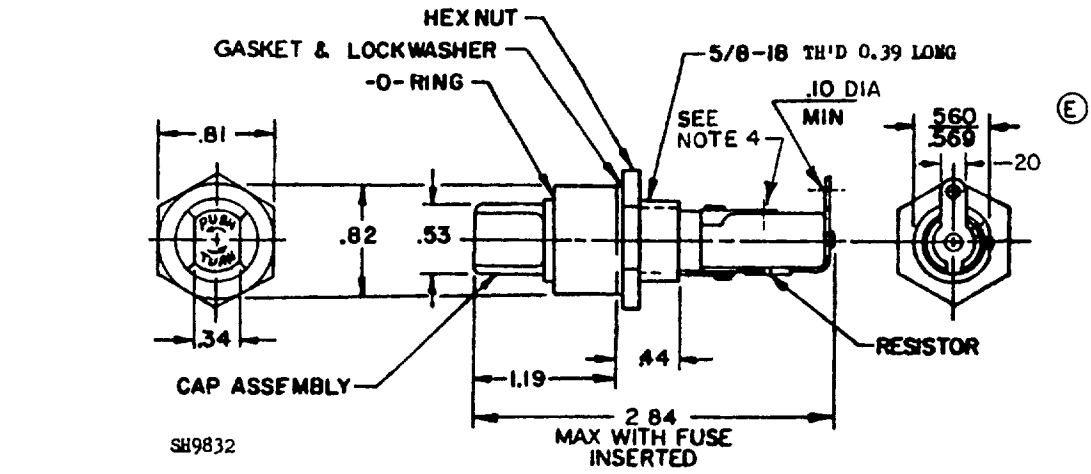



FIGURE 1. Type FHL17G1.



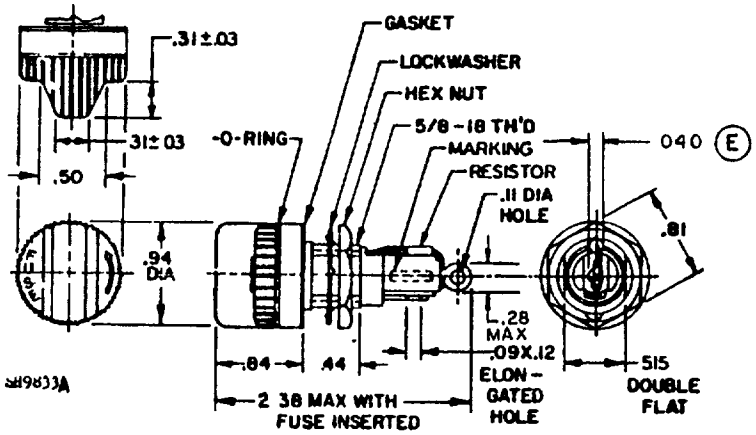


FIGURE 2. Type FHL17G2.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances for two place decimals shall be ±.02 (.5 mm) and for three place decimals ±.005 (.13 mm).
4. Terminal is .20 inch wide with a .10 inch minimum diameter solder hole.

(E) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Body material: Molded plastic compound, SDG-F of MIL-M-14.

Fuse accommodation:

Ferrule type

Size: 0.250 inch diameter, 1.250 inch length.

Style: MIL-F-15160/2, /3, and MIL-F-23419/9.

Poles: One.

Rating: 20 amperes, 90-250 volts.

Panel thickness: 0.187 inch maximum.

Gaskets and o-rings: ZZ-R-765.

Indicating type: Neon lamp with clear cap.

(E) Lamp series resistor: MIL-R-39008/2 or MIL-R-39017/2, 120,000 ohms, 0.5 watt.

Terminals: Solder lug type.

Enclosure: Dripproof.

Test fuses:

Temperature rise: F03A125V20A of MIL-F-15160/3.

Short circuit: F03A250V15A of MIL-F-15160/3.

Mechanical shock: Method II of MIL-F-19207.

Terminal strength: 5 pounds.

Torque: Mounting - 30 pounds-inch.

Salt spray (corrosion): MIL-STD-202, method 101, test condition B.

Patent notice: The US Government has a royalty-free license only under claims 3 through 6, 11 and 12 of US Patent No. 2,854,549 owned by McGraw Electric Company only for the benefit of manufacturers of the items called for in this specification sheet either for the Government or for use in equipment to be delivered to the Government.

Custodians:
Army - ER
Navy - SH
Air Force - 11

Review activities:
Army - AR, ME, MI
Navy - EC, OS
Air Force - 17, 85

User activities:
Army - AT
Navy -AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - SH

(Project 5920-0404-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:27Z
Check the source to verify that this is the current version before use.