MILITARY STANDARD

MIL-STD-1323-187
(NAVY)
20 MARCH 1989


UNIT LOAD
FOR UNDERWAY REPLENISHMENT
CARTRIDGE, 20MM, M50 SERIES
BELTED WITH MK 7 OR M-14 LINKS
IN CONTAINER, M548

UNIT LOAD DATA

NUMBER OF CARTRIDGES PER CONTAINER..... 100
NUMBER OF CONTAINERS PER UNIT LOAD..... 24
NUMBER OF CARTRIDGES PER UNIT LOAD..... 2400
WEIGHT OF WOOD FRAMES..... 24 LBS
WEIGHT OF STEEL STRAPPING..... 6 LBS
WEIGHT OF PALLET..... 90 LBS
CUBE..... 40.2 CU FT


△DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN
5 UNIT LOADS HIGH IN STORAGE

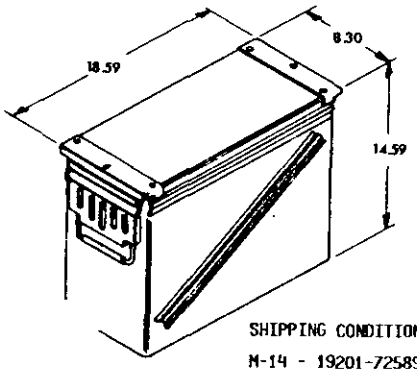

SHIPPING CONDITION
M-14 - 19201-7258969
MK 7 - 53711-5871720
53711-5172157

HAZARD CLASSIFICATION			
DODIC/NALC	WT. UNIT LOAD △	DOT	CG
A661	2210 LBS	C	I
A675	2210 LBS	C	I
A676	2210 LBS	C	I
A929	2210 LBS	INERT	INERT
A658	1956 LBS	A	IV
A665	2210 LBS	A	IV
A896	2114 LBS	C	I
A919	2210 LBS	A	IV
A926	1956 LBS	C	I

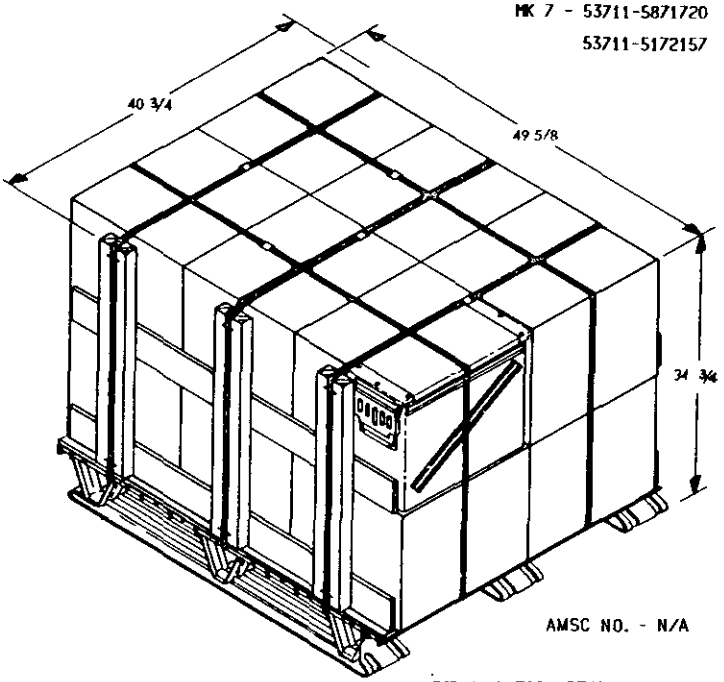

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, *CONTAINERLOADING AND CARLOADING MILITARY* STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

E. Kingsley 3/20/89
SIGNATURE TDA, WPNSTA EARLE DATE

SIGNATURE NAVSEASYSCOM BY DIRECTION 3/20/89 DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR S. R Peter 3/20/89
DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(A) THREAD STRAPPING, ITEM 2, BETWEEN DECK WIRES OF PALLET, ITEM 1, AS SHOWN IN DETAIL A.

(B) POSITION CONTAINERS ON PALLET DECK WITH EQUAL UNDERHANG ON BOTH SIDES AND EQUAL OVERHANG ON BOTH ENDS.


(C) POSITION STRAPPING AROUND CONTAINERS, TENSION AND DOUBLE NOTCH SEAL, ITEM 4.


(D) POSITION STRAPPING, ITEM 3, UNDER THE PALLET DECK AND AROUND THE PREFABRICATED SIDE FRAME ASSEMBLIES. TENSION AND DOUBLE NOTCH SEAL.

(E) SECURE STRAPPING TO VERTICAL BATTENS OF THE SIDE FRAMES WITH STAPLES, ITEM 5, AS SHOWN.


MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323.

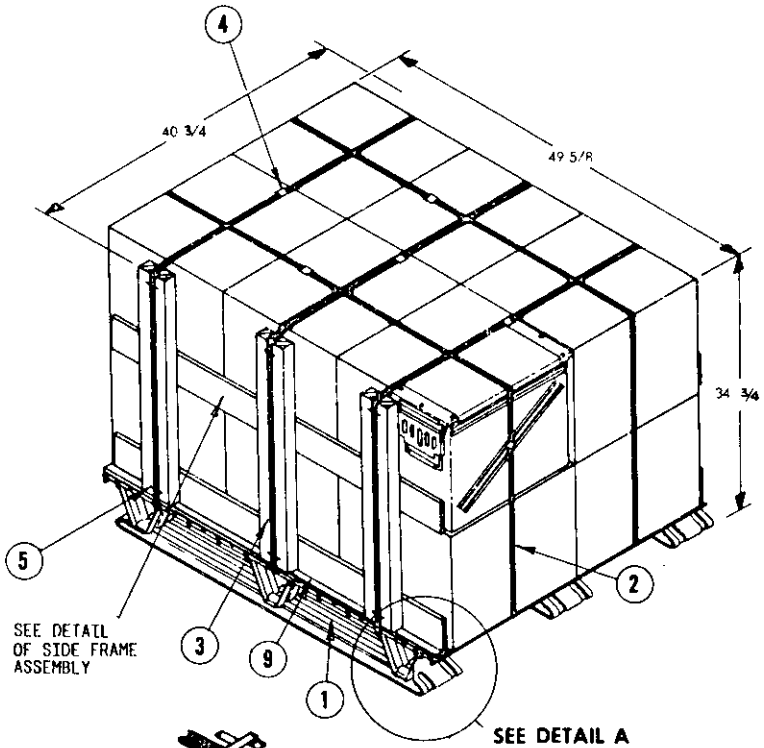

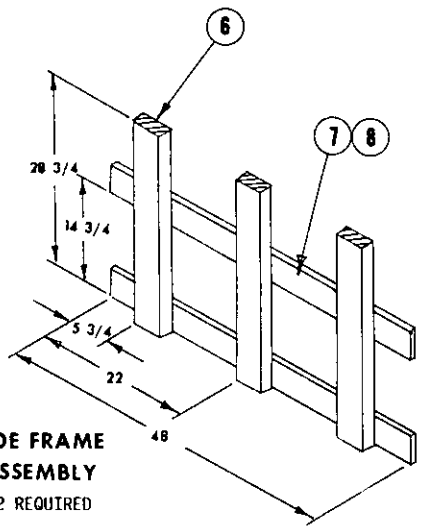

SIDE FRAME ASSEMBLY
2 REQUIRED

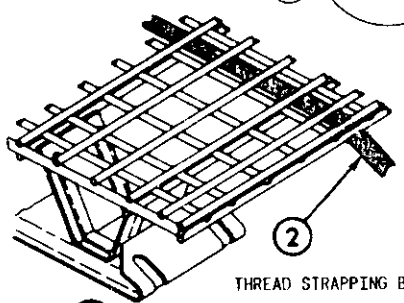

DETAIL A

THREAD STRAPPING BETWEEN THE 6TH AND 7TH WIRE.

DEPALLETIZING PROCEDURE

(A) REMOVE STAPLES.

(B) CUT AND REMOVE STRAPPING.

(C) REMOVE SIDE FRAMES.

(D) REMOVE CONTAINERS.

* UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH BASIC DOCUMENT, MIL-STD-1323 (NAVY).

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
1	9	BASE SHEET	PLYWOOD	40 X 48 X 3/4
3 PER JOINT	8	NAIL, STD BOX	STEEL *	6d
4	7	HORIZONTAL BATTEN	PLYWOOD *	1/2 X 4 X 48
6	6	VERTICAL BATTEN	WOOD DRESSED *	2 X 4 X 28-3/4
12	5	STAPLES	STEEL *	3/4
5	4	SEAL	STEEL COATED *	3/4
3	3	STRAPPING	STEEL *	3/4 X .035 X 12 FT 6
2	2	STRAPPING	STEEL *	3/4 X .035 X 14 FT 6
1	1	PALLET, MK 3 MOD 0	564200 STEEL	40 X 48 X 4-3/4

LIST OF MATERIALS

REVIEW ACTIVITY:
NAVY-OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N808)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.