MILITARY STANDARD

MIL-STD-1323-268A
(NAVY)

17 JUNE 1993

SUPERSEDING MIL-STD-1323-268
11 JANUARY 1988

UNIT LOAD
FOR UNDERWAY REPLENISHMENT DISPENSER AND BOMB, AIRCRAFT MK 20 AND MODS, CBU-100/B, -100A/B, -99/B, -99A/B (ROCKEYE) AND CBU-78/B, -78A/B (GATOR) IN CONTAINER, CNU-238/E

UNIT LOAD DATA

DISPENSERS PER CONTAINER	2
CONTAINERS PER UNIT LOAD	2
DISPENSERS PER UNIT LOAD	4
GROSS WEIGHT OF ONE CONTAINER	1707 LBS.
WEIGHT OF BATTENS	7.5 LBS.
WEIGHT OF STRAPPING	3.5 LBS
GROSS WEIGHT OF UNIT LOAD	3425 LBS. △
CUBE	121.2 CU FT

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN
3 UNIT LOADS HIGH IN STORAGE

FOR HAZARD CLASSIFICATION
SEE SW020-AC-SAF-010/020/030

CONTAINER DIMENSIONS: (DWG. 930AS100)

LENGTH	104
WITH	38
HEIGHT (OVERALL)	27
(STACKING)	26

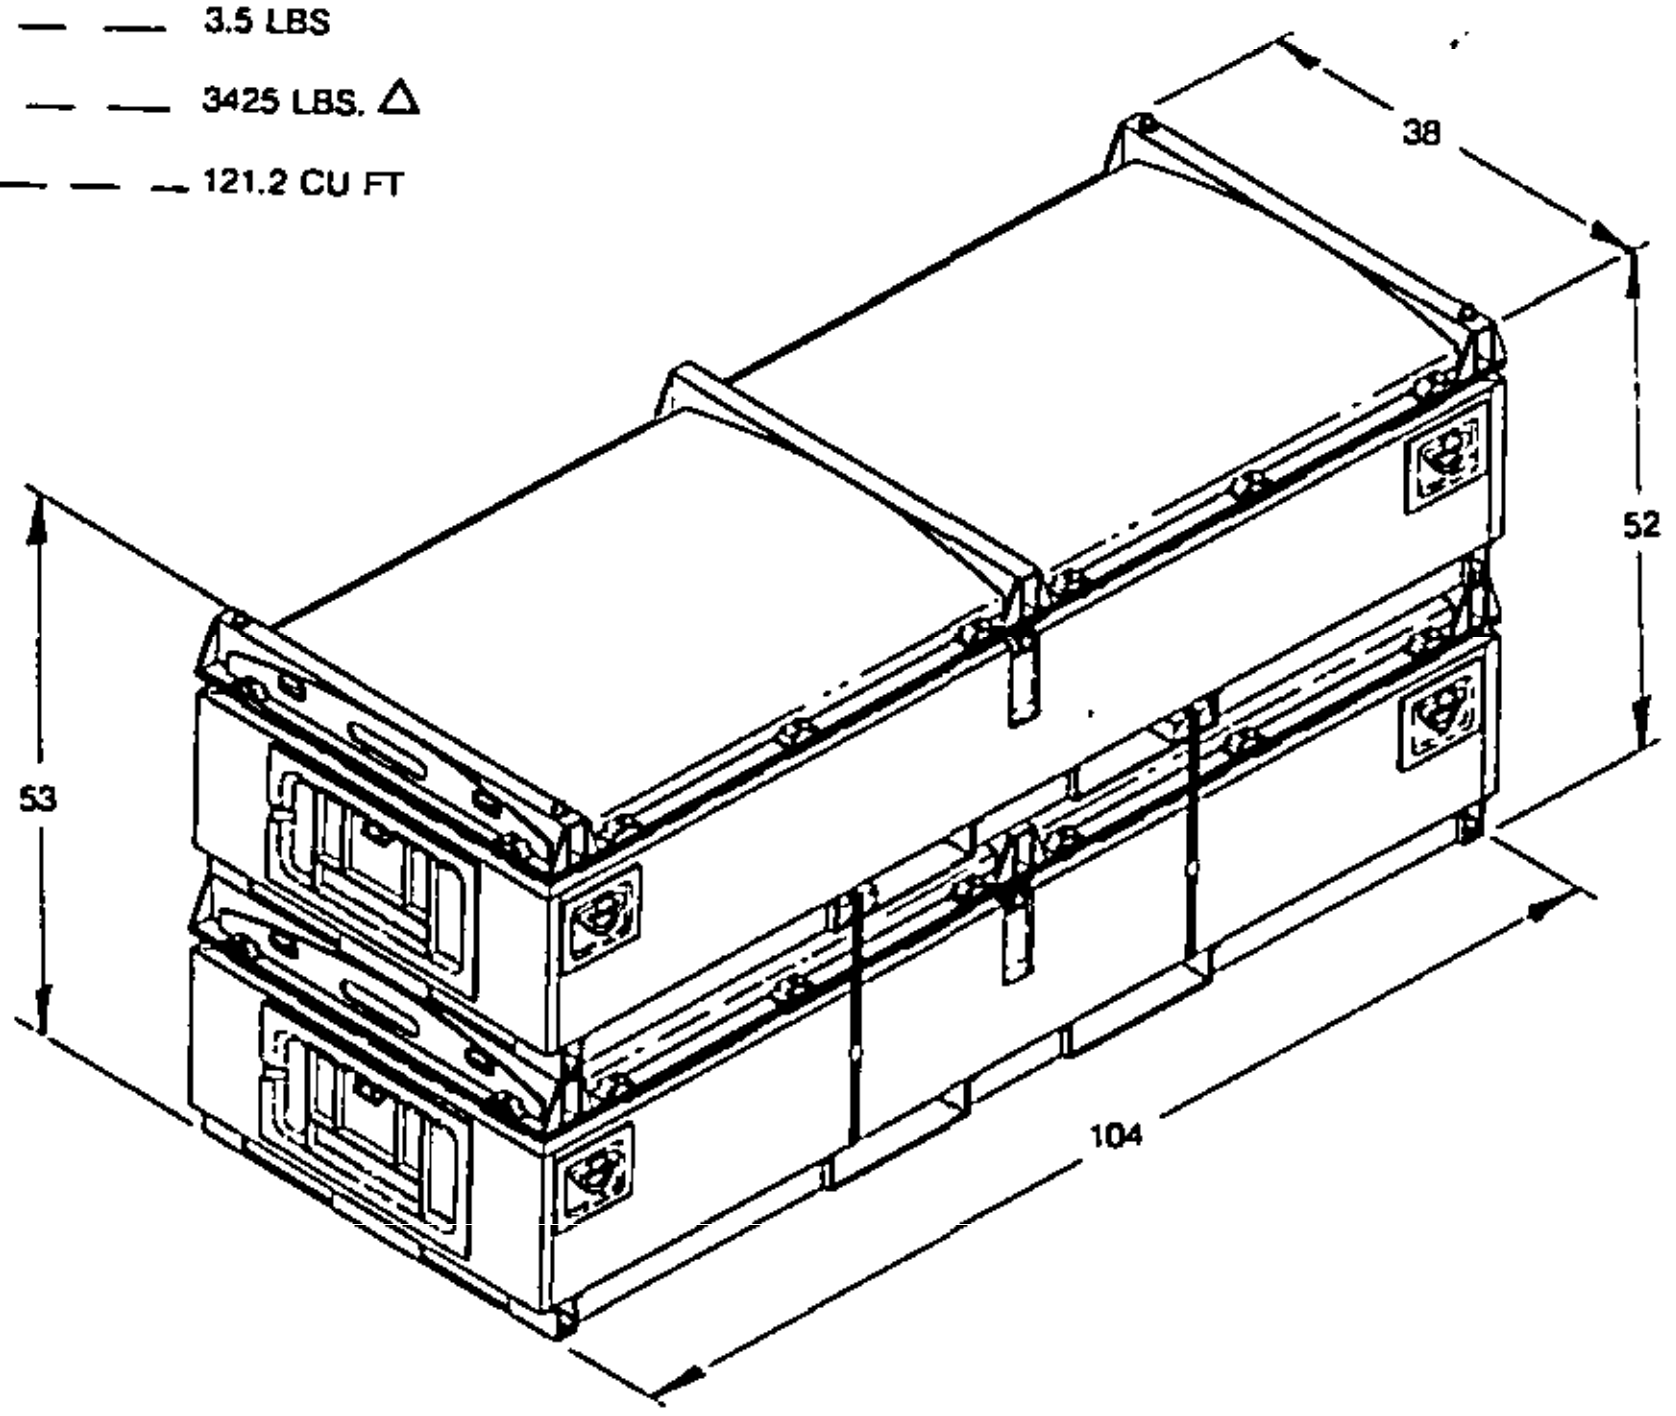

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCK-LOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA APPROVAL	SYSCOM APPROVAL
A	UPDATED SH 1 & 2	[illegible]	[illegible]	[illegible]

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY)

1-11-88
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

1-11-88
SIGNATURE AIRSYSCOM, BY DIRECTION DATE

ORIGINATOR Charles McBride 1/11/88
SIGNATURE DATE
NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:58Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

(A) STACK TWO CONTAINERS SO THAT STACKING LUGS ARE ENGAGED. IT IS NOT NECESSARY TO KEEP ANY PARTICULAR ORIENTATION OF THE CONTAINER ENDS WHILE STACKING.

(B) POSITION BATTENS, ITEM 3, IN FORK POCKETS OF TOP CONTAINER AS SHOWN.

(C) POSITION STRAPPING, ITEM 1, THROUGH FORK POCKETS OF TOP AND BOTTOM CONTAINERS AND CENTERED ON BATTENS, ITEM 3. TENSION AND DOUBLE NOTCH THE SEALS, ITEM 2.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

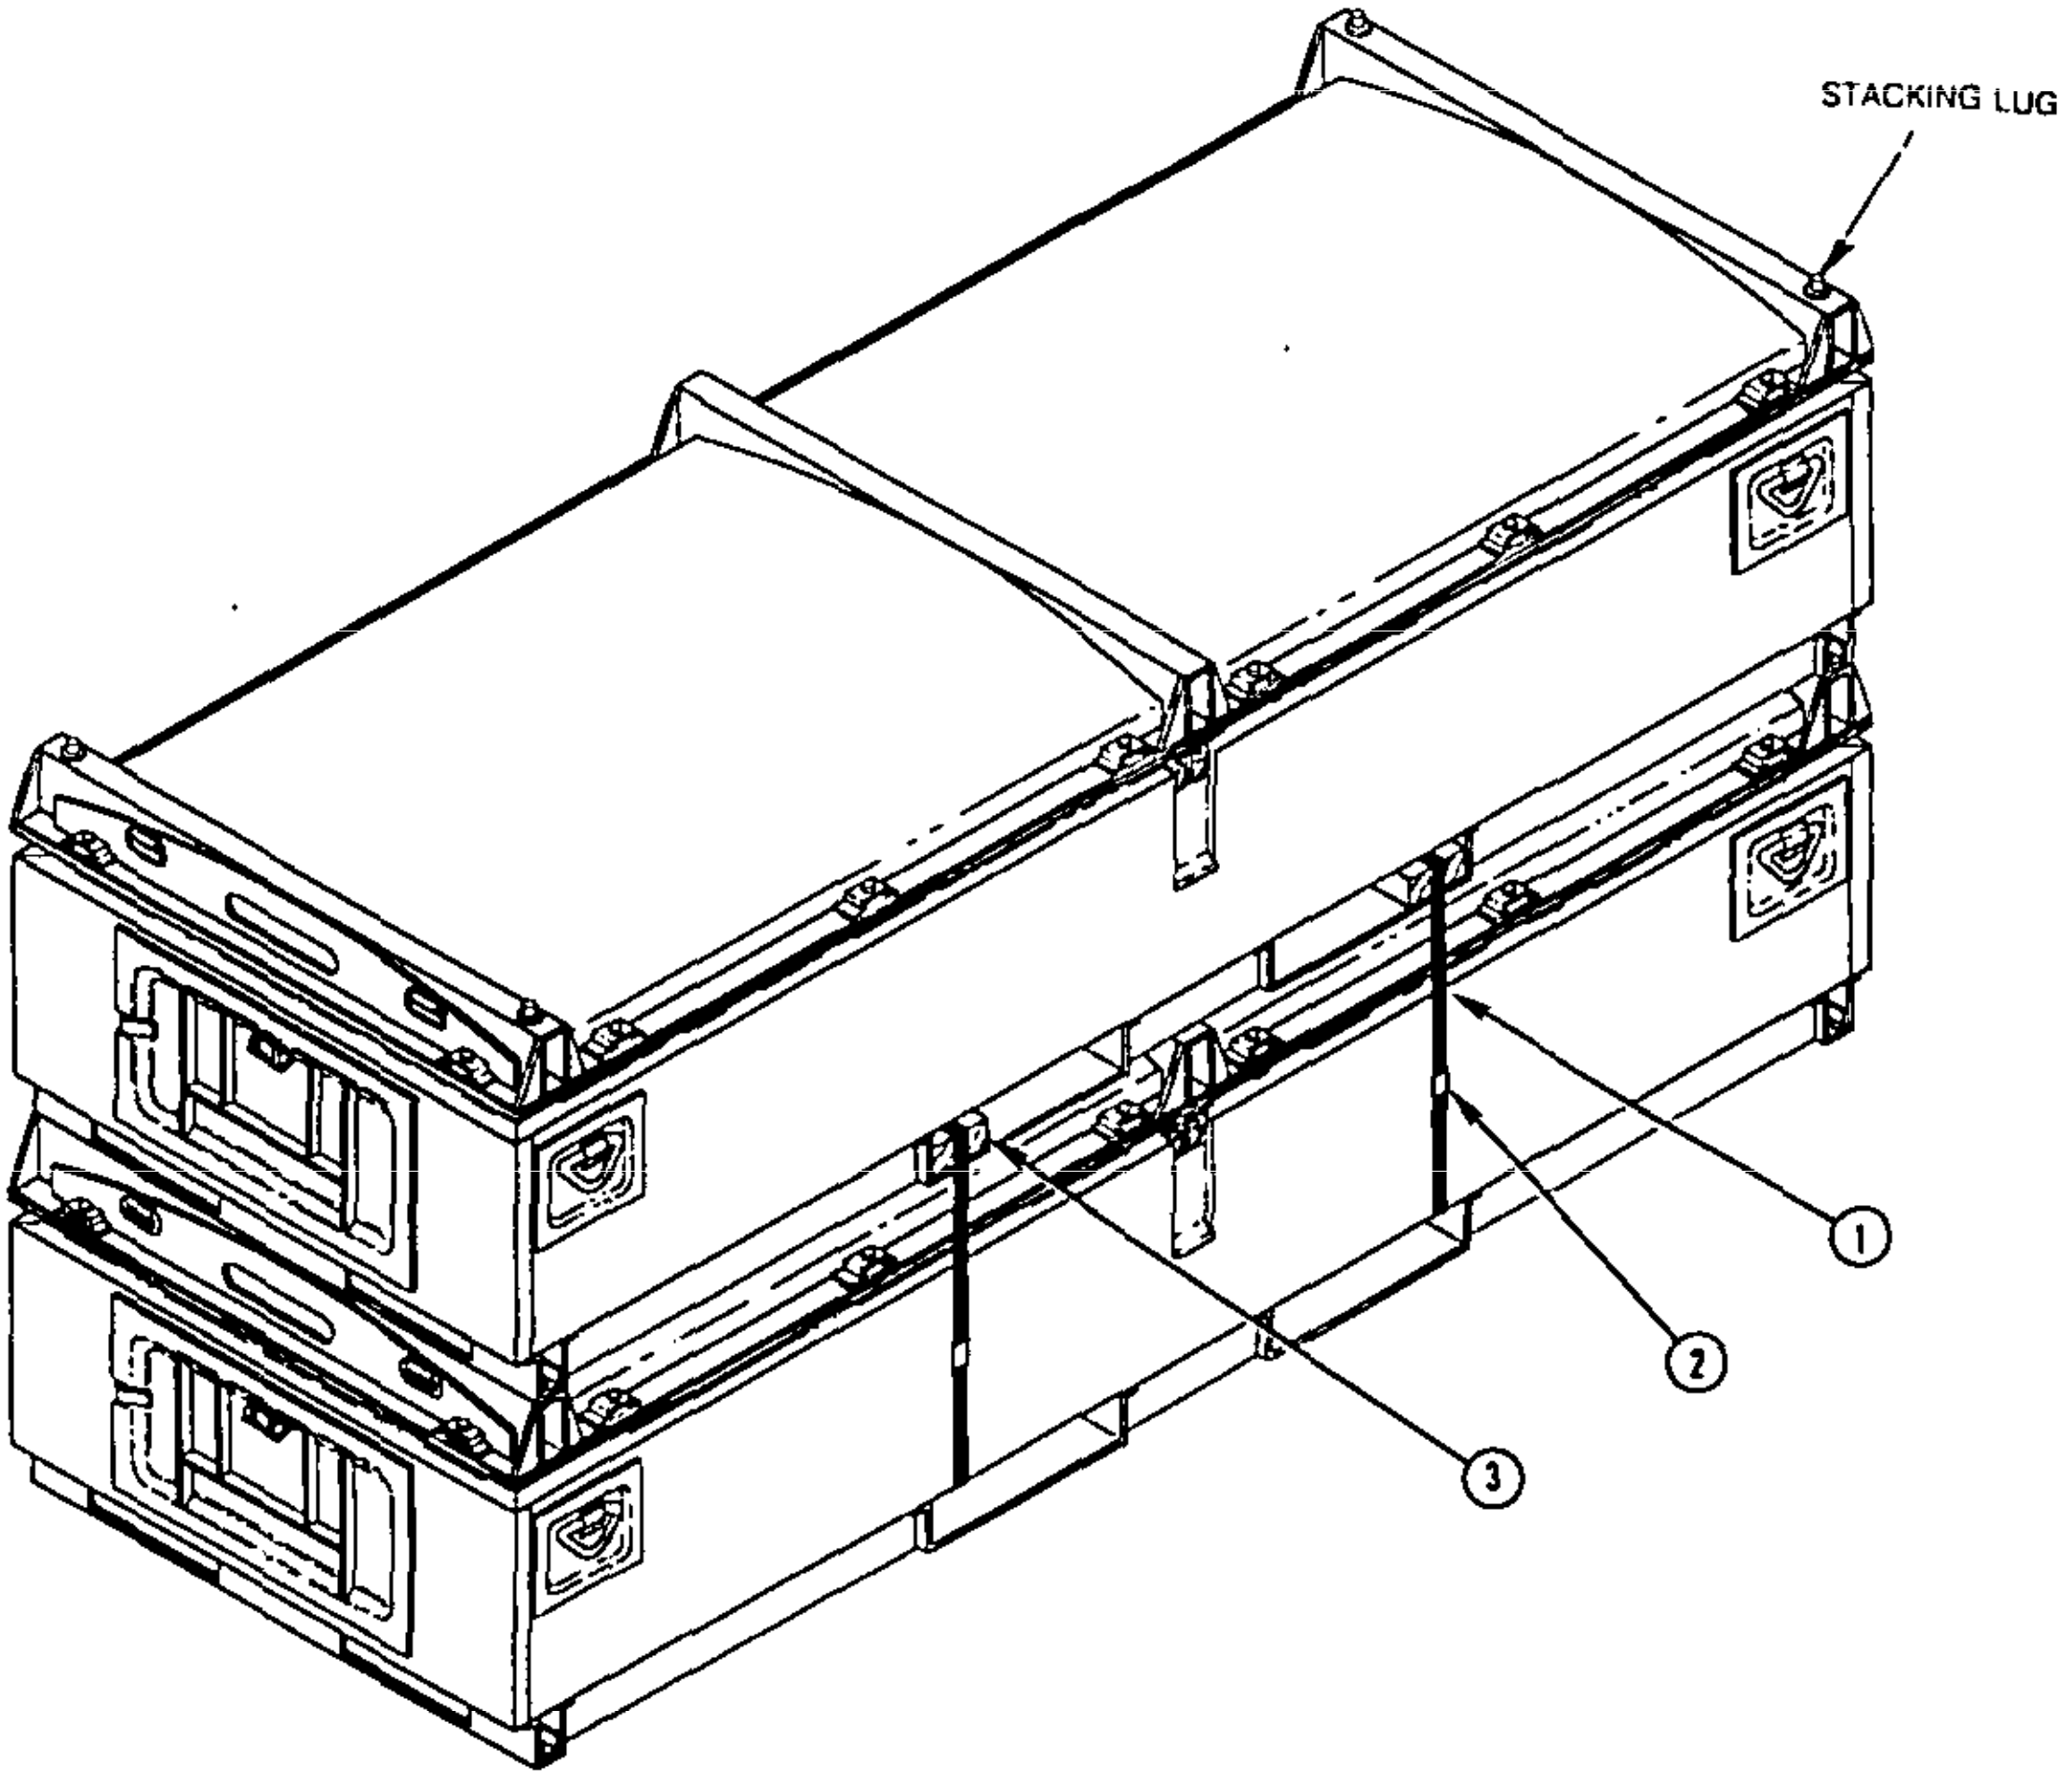

NOTE:

1. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS TO BE IAW MIL-STD-1323 (NAVY)

DEUNITIZING PROCEDURE

(A) CUT AND REMOVE STRAPPING.

(B) REMOVE BATTENS.

(C) REMOVE TOP CONTAINER.

REQ	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
2	3	BATTEN	WOOD	2 X 4 X 38
2	2	SEAL	STEEL	FOR 1 1/4 STRAPPING
2	1	STRAPPING	STEEL	1 1/4 X .035 X 11 FT 6

LIST OF MATERIALS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-0111)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:58Z
Check the source to verify that this is the current version before use.