MILITARY STANDARD

MIL-STD-1323-305
(NAVY)
18 NOVEMBER 1988

UNIT LOAD
FOR UNDERWAY REPLENISHMENT

BLU-80/B BALLONETTE
IN CONTAINER, CNU-388/E

UNIT LOAD DATA

NUMBER OF BALLONETTES PER CONTAINER	2	
NUMBER OF CONTAINERS PER UNIT LOAD	12	
NUMBER OF BALLONETTES PER UNIT LOAD	24	
GROSS WEIGHT OF ONE CONTAINER	161	LBS
WEIGHT OF STEEL STRAPPING	6	LBS
WEIGHT OF PALLET	90	LBS
GROSS WEIGHT OF UNIT LOAD	2028	LBS △
CUBE	101.5	CU FT

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN
4 UNIT LOADS HIGH IN STORAGE.

SHIPPING AND STORAGE CONTAINER, CNU-388/E
30003-8394575


CONTAINER DIMENSIONS

LENGTH	79 3/4
WIDTH	16 3/8
HEIGHT (OVERALL)	11 1/2
(STACKING)	10

UNIT LOAD DIMENSIONS

LENGTH	79 3/4
WIDTH	49 1/8
HEIGHT (OVERALL)	44 3/4
(STACKING)	43 1/4

HAZARD CLASSIFICATION			
DODIC/NALC	ITEM NAME	DOT	CG
3W76	BLU-80/B	CLASS C	CLASS X-A

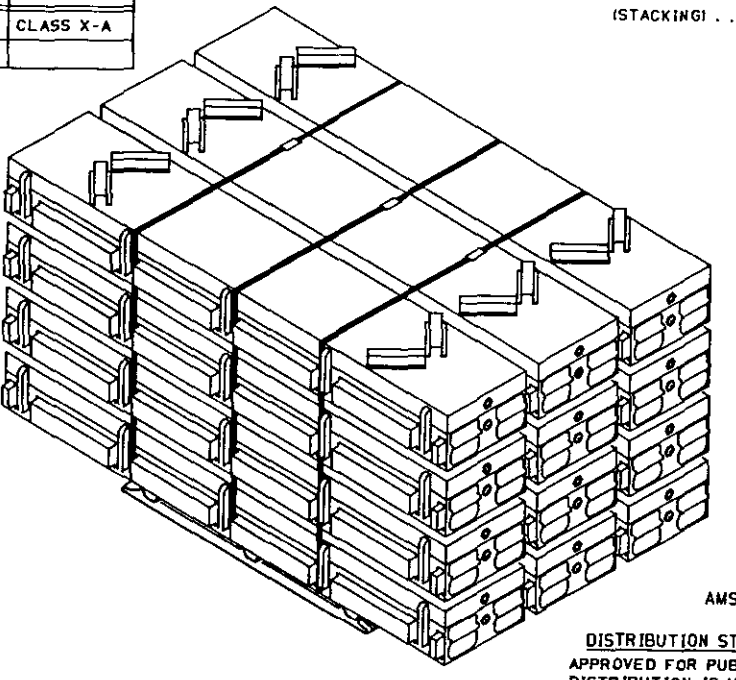

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

SIGNATURE — TDA, WPNSTA EARLE — DATE 11-15-88

SIGNATURE — AIRSYSCOM BY DIRECTION — DATE 11-18-88

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR — DATE 10/31/88

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 202640-23T23:58Z
Check the source to verify that this is the current version before use.


PALLETIZING PROCEDURE

(A) POSITION THE CONTAINERS ON THE PALLET DECK, ITEM 1, WITH EQUAL OVERHANG ON BOTH SIDES AND ENDS. NOTE: ALL CONTAINERS SHALL BE POSITIONED WITH THEIR BREATHER VALVES AT THE SAME END OF THE UNIT LOAD.

(B) POSITION SRAPPING, ITEM 2, UNDER THE PALLET DECK AND OVER THE UNIT LOAD. TENSION AND DOUBLE NOTCH THE SEALS, ITEM 3. NOTE: THE STRAPPING MUST BE POSITIONED BETWEEN THE LATCHES AHD CHANNELS ON THE SIDES OF THE UNIT LOAD AS SHOWN.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323 (NAVY).

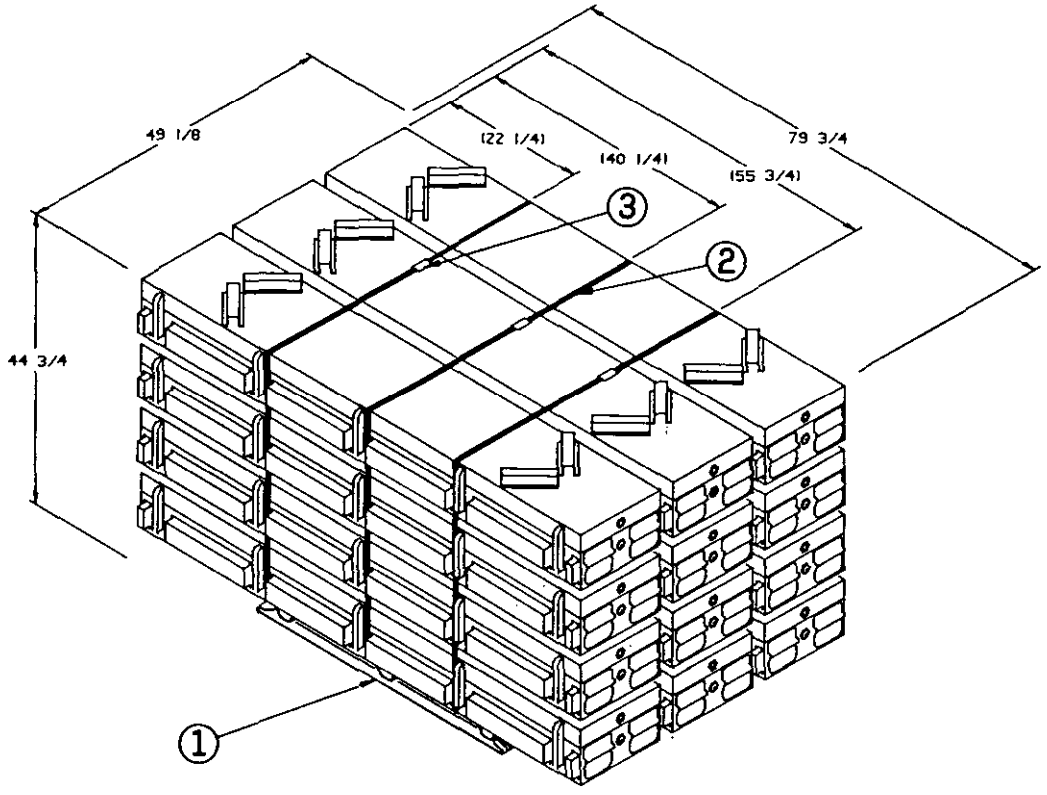

NOTES:

1. ALL MATERIALS SHALL BE IN ACCORDANCE WITH THE BASIC DOCUMAENT, MIL-STD-1323 (NAVY).
2. DO NOT USE TYPE I STRAPPING WITH POWER TOOLS.

DEPALLETIZING PROCEDURE

(A) CUT AND REMOVE STRAPPING.
(B) REMOVE CONTAINERS.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
2	3	SEAL	SEE NOTE 1	3/4
2	2	STEEL STRAPPING	SEE NOTES 1 & 2	3/4 X .035 X 15 FT 6
1	1	PALLET, MK 3 MOD 0	564200	40 X 48 X 4 3/4

LIST OF MATERIALS

REVIEW ACTIVITY:
NAVY-OS, AS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N5651

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:58Z
Check the source to verify that this is the currentversion before use.