MILITARY STANDARD

MIL-STD-1323-324

(NAVY)

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
BATTERY,MERCURY MK 130 TYPE IN
SMALL ARMS AMMUNITION BOX MK 1 MOD 0


13 SEPTEMBER 1985

UNIT LOAD DATA


	MK 12 - 0	MK 12 - 1
NUMBER OF BATTERIES PER BOX	45	45
NUMBER OF BOXES PER UNIT LOAD	20	20
NUMBER OF BATTERIES PER UNIT LOAD	900	900
GROSS WEIGHT OF ONE BOX	74 LBS	74 LBS
WEIGHT OF PALLET	110 LBS	72 LBS
WEIGHT OF STRAPPING	8 LBS	8 LBS
GROSS WEIGHT OF UNIT LOAD	1598 LBS△	1560 LBS△
CUBE	35.6 CU.FT.	35.2 CU.FT.

DO NOT STACK MORE THAN 5 UNIT LOADS HIGH IN STORAGE

△ DO NOT USE FOR SHIPPING WEIGHT

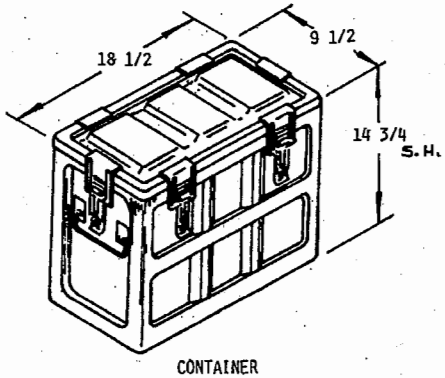

CONTAINER
SHIPPING AND STORAGE
30003-67A210F1

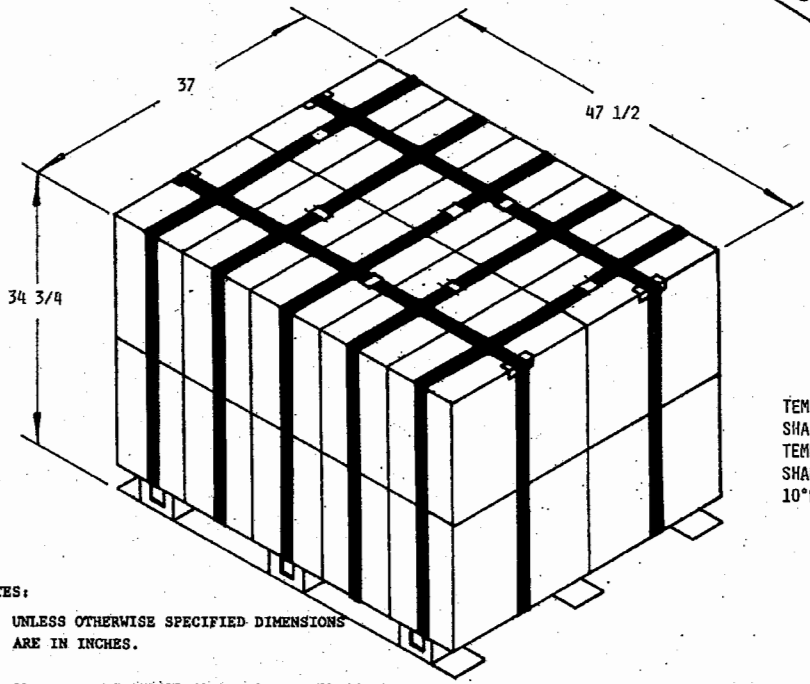

-CAUTION-
TEMPERATURE DURING SHIPMENT SHALL NOT EXCEED 85°F. TEMPERATURE DURING STORAGE SHALL BE MAINTAINED BETWEEN 10°F AND 40°F.

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

DISTRIBUTION STATEMENT A
Approved for public release; distribution is unlimited.

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS

H.J. Gray NWSE 9/12/85
SIGNATURE, TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Fell 9/12/85
SIGNATURE SEASYSCOM, BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY)

ORIGINATOR
NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil — Downloaded: 2026-10-23T13:36:12Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(A) THREAD STRAPPING, ITEM 2, BETWEEN DECK WIRES OF PALLET, ITEM 1, AS SHOWN IN DETAIL A.


(B) PLACE CONTAINERS ON PALLET DECK WITH EQUAL OVERHANG ON ALL SIDES.

(C) POSITION STRAPPING, ITEM 2, AROUND UNIT LOAD AND EDGE PROTECTORS, ITEM 5, TENSION AND DOUBLE NOTCH SEAL, ITEM 4.


(D) POSITION STRAPPING, ITEM 3, UNDER PALLET DECK AND AROUND UNIT LOAD, TENSION AND DOUBLE NOTCH SEAL.


MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323.



DETAIL A



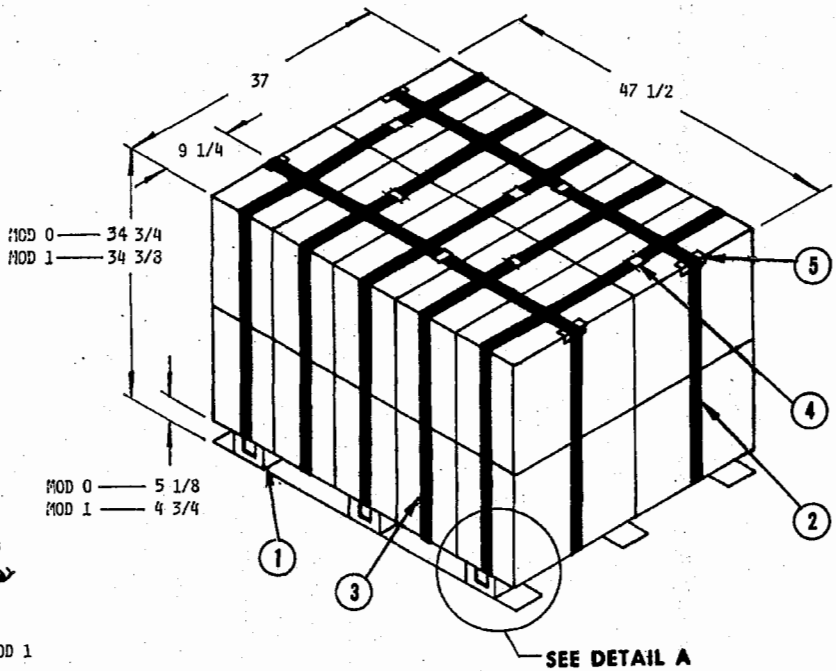

A. FOR MK 12 MOD 0 - THREAD STRAPPING BETWEEN 3RD AND 4TH WIRES AS SHOWN.

B. FOR MK 12 MOD 1 - THREAD STRAPPING BETWEEN 4TH AND 5TH WIRES AS SHOWN.

NOTES: 1. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1323.

2. DO NOT USE TYPE I STRAPPING WITH POWER TOOLS.

DEPALLETIZING PROCEDURE

(A) CUT AND REMOVE STRAPPING
(B) REMOVE EDGE PROTECTORS
(C) REMOVE CONTAINERS

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	5	EDGE PROTECTOR	SEE NOTE 1	FOR 3/4 STRAP
7	4	SEAL	SEE NOTE 1	3/4
5	3	STRAPPING	SEE NOTES 1 AND 2	3/4 X .035 X 12FT
2	2	STRAPPING	SEE NOTES 1 AND 2	3/4 X .035 X14FT
1	1	PALLET MOD 1 MK 12 MOD 2	DWG 2845217 DWG 2086479	35X 45 1/2X 4 3/4 35X 45 1/2X 5 1/8

LIST OF MATERIALS

REVIEW ACTIVITY:
NAVY-OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N672)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:59Z
Check the source to verify that this is the current version before use.