INCH-POUND

A-A-51175B
18 August 2005
SUPERSEDING
A-A-51175A
4 December 1996

COMMERCIAL ITEM DESCRIPTION

WHEEL, BUFFING (BUFFS), FULL DISC, CLOTH TYPE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the requirements for full disc, cloth type, buffing wheels intended for use on automatic, semi-automatic, and hand-held machinery in the coloring, cutting, buffing, and finishing of metal and plastic surfaces.

2. CLASSIFICATION. The buffing wheels shall be of the following classes, styles, wheel diameters, and arbor hole diameters:

2.1 Class. The class to be furnished shall be as specified (see 7.3(b)).

Class 1 - Loose sewn
Class 2 - Spiral sewn
Class 3 - Concentric sewn
Class 4 - Bias-cut

2.2 Style. The style to be furnished shall be as specified (see 7.3(c)).

Style A - Muslin
Style B - Industrial cotton sheeting
Style C - Domet flannel
Style D - Canton flannel
Style E - Sisal with alternating cloth layers (available only for class 2)

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: STDZNMGT@dla.mil or Defense Supply Center Richmond (DSCR), ATTN: DSCR-VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616.

AMSC N/A FSC 3460

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

2.3 Wheel diameter. The wheel diameter to be furnished shall be one of the sizes listed in table I (see 7.3(d)).

TABLE I. Wheel diameter.

Size code	Diameter (inches)	Size code	Diameter (inches)
0	4	5	14
1	6	6	16
2	8	7	18
3	10	8	20
4	12		

2.4 Arbor hole diameter. The arbor hole diameter to be furnished shall be one of the sizes listed in table II (see 7.3(e)).

TABLE II. Arbor hole diameter.

Size code	Diameter (inch)	Size code	Diameter (inch)
1	1/8	6	7/8
2	3/8	7	1
3	1/2	8	1-1/4
4	5/8	9	2-1/2
5	3/4		

3. SALIENT CHARACTERISTICS

3.1 General requirements. The wheel shall be new, free from blemishes and defects, and capable of operation in accordance with the requirements herein. The wheel shall have a uniform, balanced, concentric, and true finishing surface. Sewn wheels shall be stitched with high quality industrial thread. Unless otherwise specified (see 7.3 (f)), hubs or inserts shall be furnished as an integral part of the buff.

3.2 Sewing. Loose sewn buffing wheels (class 1) shall have one row of stitching around the arbor hole. The stitch spacing on class 2 and 3 wheels shall be as specified (see 7.3 (g)).

3.3 Ply. Unless otherwise specified (see 7.3 (h)), class 1, 2, and 3 wheels shall be 20 ply. Class 4 wheels shall be 14 ply for wheels under 10 inches in diameter and 16 ply for wheels 10 inches in diameter and greater.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Environmental protection. The item shall meet all applicable Environmental Protection Agency restrictions in effect on the date of the contract. These regulations apply to the emission of materials hazardous to the environment or the user's health and shall be met during the manufacturing, service, transportation, storage, and operation/use of the item.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.


5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the acquisition order (see 7.3(i)).

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

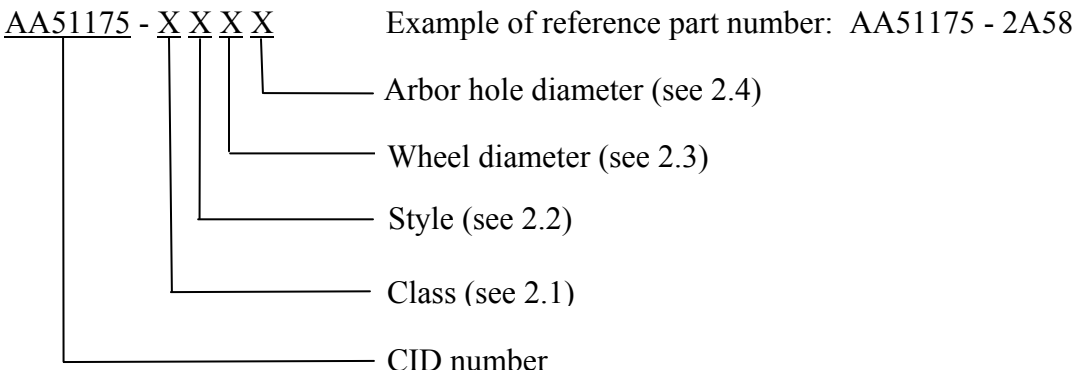

AA51175 - 2A58 identifies a spiral sewn, muslin buffing wheel with a diameter of 14 inches and an arbor hole diameter of 1-1/4 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

7.2 Sources of documents.

7.2.1 FAR. The FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies of FAR documents may be obtained from http://www.arnet.gov/far/.

7.2.2 EPA restrictions. Copies of EPA restrictions may be obtained from the Environmental Protection Agency, Ariel Rios Building, 1200 Pennsylvania Avenue N.W., Washington, DC 20460.

7.3 Ordering data. The acquisition order should specify the following:

a. CID document number, revision, and CID PIN.
b. Class (see 2.1).
c. Style (see 2.2).
d. Wheel diameter (see 2.3).
e. Arbor hole diameter (see 2.4).
f. Hubs or inserts, if different (see 3.1).
g. Stitch spacing (see 3.2).
h. Ply, if different (see 3.3).
i. Preservation, packing, and marking (see 6.1).

7.4 Subject term (key word) listing.

arbor hole
hubs
ply
sewn
stitch spacing

MILITARY INTERESTS:	CIVIL AGENCY COORDINATING ACTIVITY:
Custodian: Air Force - 99	GSA - FSS
Review Activity: Air Force - 84	Preparing Activity: DLA - GS6
	(Project 3460-0214)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.