INCH-POUND
A-A-51189A
30 May 2000
SUPERSEDING
A-A-51189
29 January 1991

# COMMERCIAL ITEM DESCRIPTION

## SOCKET, TAPER, REDUCING SLEEVE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) establishes the government acquisition requirements for reducing sleeve taper sockets used to adapt small taper shank tools to larger size spindles.

2. CLASSIFICATION. The tapers shall be of the sizes listed in table I. The size to be furnished shall be as specified (see 7.3(b)).

2.1 Taper sizes. The taper sizes listed in table I correspond to dimensions of internal and external Morse taper sleeves.

TABLE I. Morse taper sleeves – internal and external sizes.

| Size code | Size | Morse taper | | Size code | Size | Morse taper | |
|---|---|---|---|---|---|---|---|
| | | External | Internal | | | External | Internal |
| 01 | 2 by 1 | No. 2 | No. 1 | 11 | 6 by 1 | No. 6 | No. 1 |
| 02 | 3 by 1 | No. 3 | No. 1 | 12 | 6 by 2 | No. 6 | No. 2 |
| 03 | 3 by 2 | No. 3 | No. 2 | 13 | 6 by 3 | No. 6 | No. 3 |
| 04 | 4 by 1 | No. 4 | No. 1 | 14 | 6 by 4 | No. 6 | No. 4 |
| 05 | 4 by 2 | No. 4 | No. 2 | 15 | 6 by 5 | No. 6 | No. 5 |
| 06 | 4 by 3 | No. 4 | No. 3 | 16 | 7 by 3 | No. 7 | No. 3 |
| 07 | 5 by 1 | No. 5 | No. 1 | 17 | 7 by 4 | No. 7 | No. 4 |
| 08 | 5 by 2 | No. 5 | No. 2 | 18 | 7 by 5 | No. 7 | No. 5 |
| 09 | 5 by 3 | No. 5 | No. 3 | 19 | 7 by 6 | No. 7 | No. 6 |
| 10 | 5 by 4 | No. 5 | No. 4 | | | | |

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 3460

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS. The socket design shall be similar to the configuration shown in figure 1. A drift (tang) slot shall penetrate the tapered bore. The material quality shall be sufficient to ensure product compliance with the requirements of this document.

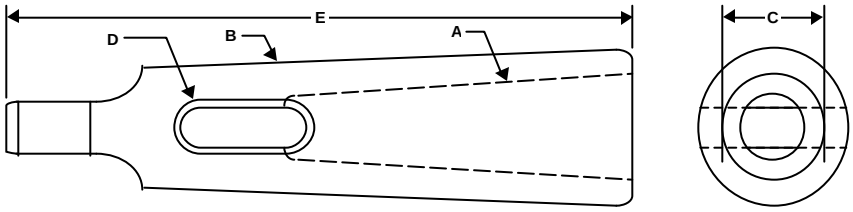


FIGURE 1. Socket, taper, reducing sleeve.

3.1 Dimensions. The internal taper (A) and external taper (B) shall be selected from table I. The gage line diameter (C) and tang slot (D) shall comply with the taper dimensions specified in American Society of Mechanical Engineers (ASME) B5.10, "Machine Tapers (Self Holding and Steep Taper Series)" (DoD adopted). Unless otherwise specified in the acquisition order (see 7.3(c)), socket length (E) shall be the standard length.

3.2 Concentricity. The external taper shall be concentric with the internal taper within 0.002 inch total indicator reading (TIR) projected five inches from the socket mouth.

3.3 Hardness. Unless otherwise specified in the acquisition order (see 7.3(d)), socket hardness shall not be less than "30" on the Rockwell "C" hardness scale when tested in accordance with the American Society for Testing and Materials (ASTM) E 18, "Standard Test Methods for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials" (DoD adopted).

3.4 Finish. The external taper shall have a ground finish.

3.5 Special use (broken tool). If specified in the acquisition order (see 7.3(e)), the socket provided shall have a flattened surface on the inner taper to allow the socket to be used with small taper shank tools with broken tangs and flattened shanks.

3.6 Marking. The socket shall be permanently marked with the manufacturer's name or with a well-known trademark. The socket shall also be permanently marked with the American Society of Mechanical Engineers (ASME) numbers (see table I) designating the socket internal and external tapers.

4. REGULATORY REQUIREMENTS

4.1 Recovered material. The offeror or contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

## 5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

## 6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the sockets supplied shall be preserved, packed, and marked as specified in the acquisition order (see 7.3(f)).

## 7. NOTES

7.1 Part or identification number (PIN). The following part or identification or numbering procedure is for government purposes and does not constitute a requirement for the contractor.




7.2 Sources of documents.

7.2.1 FAR. The FAR may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.

7.2.2 ASME standards. Copies of ASME standards may be obtained from the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.

7.2.3 ASTM standards. Copies of ASTM standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

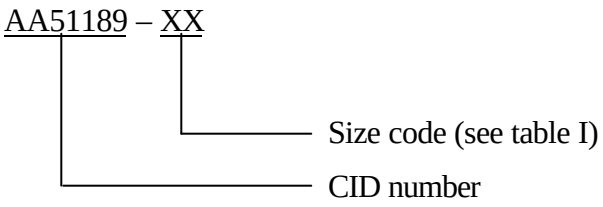

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

7.3 Ordering data. Acquisition documents must specify the following information:

a. CID document number, revision, and CID PIN
b. Taper size (see 2)
c. Taper sleeve length, if different (see 3.1)
d. Hardness, if different (see 3.3)
e. Flattened inner taper for use with broken tools, if required (see 3.5)
f. Packaging requirements (see 6.1)

7.4 Sources of supply. The manufacturers and/or suppliers listed below are known to supply products which meet the salient characteristics requirements of this document. Competition is not limited to the listed firms.

Koebert Tool Sales Incorporated
121 Holly Drive
Hatboro, PA 19040-1516

Black and Company
5351 W. Minnesota Street
Indianapolis, IN 46241-3817

7.5 National stock number (NSN). The NSNs listed below are assigned to this document. Other NSNs may also correspond with this document.

| | | |
|---|---|---|
| 3460-00-140-4996 | 3460-00-227-7507 | 3460-00-237-8450 |
| 3460-00-140-4997 | 3460-00-227-7520 | 3460-00-248-3893 |
| 3460-00-224-8637 | 3460-00-227-7521 | 3460-00-516-4147 |
| 3460-00-224-8641 | 3460-00-232-8117 | 3460-00-517-5897 |
| 3460-00-224-8643 | 3460-00-232-8118 | 3460-01-286-9112 |
| 3460-00-227-7500 | 3460-00-232-9115 | |

MILITARY INTERESTS:

Custodians:
Army - AL
Air Force - 99

Reviewer:
Air Force - 84

CIVIL AGENCY
COORDINATING ACTIVITY:
GSA - 6FET

Preparing activity:
DLA - GS

(Project 3460-0197)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.