FED. SUP CLASS
3455

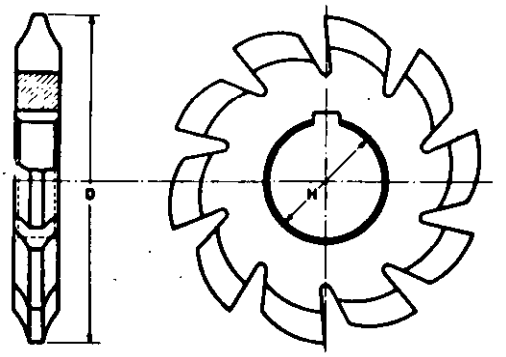

DASH NO.	Diametral Pitch	Cutter No.	Diameter of Cutter (D)	Diameter of Hole (H)
-33	2	1	5-3/4	1-1/2
-34	2	2	5-3/4	1-1/2
-35	2	3	5-3/4	1-1/2
-36	2	4	5-3/4	1-1/2
-37	2	5	5-3/4	1-1/2
-38	2	6	5-3/4	1-1/2
-39	2	7	5-3/4	1-1/2
-40	2	8	5-3/4	1-1/2
-69	3	5	4-3/4	1-1/4
-73	3	1	5-1/4	1-1/2
-74	3	2	5-1/4	1-1/2
-75	3	3	5-1/4	1-1/2
-76	3	4	5-1/4	1-1/2
-77	3	5	5-1/4	1-1/2
-78	3	6	5-1/4	1-1/2
-79	3	7	5-1/4	1-1/2
-80	3	8	5-1/4	1-1/2
-90	4	2	3-5/8	1
-94	4	6	3-5/8	1
-97	4	1	4-1/4	1-1/4
-98	4	2	4-1/4	1-1/4
-99	4	3	4-1/4	1-1/4
-100	4	4	4-1/4	1-1/4
-101	4	5	4-1/4	1-1/4
-102	4	6	4-1/4	1-1/4
-103	4	7	4-1/4	1-1/4
-104	4	8	4-1/4	1-1/4
-105	4	1	4-1/2	1-1/2
-107	4	3	4-1/2	1-1/2
-108	4	4	4-1/2	1-1/2
-109	4	5	4-1/2	1-1/2
-111	4	7	4-1/2	1-1/2
-129	5	1	3-3/4	1-1/4
-130	5	2	3-3/4	1-1/4
-131	5	3	3-3/4	1-1/4
-132	5	4	3-3/4	1-1/4
-133	5	5	3-3/4	1-1/4
-134	5	6	3-3/4	1-1/4
-135	5	7	3-3/4	1-1/4
-136	5	8	3-3/4	1-1/4

DASH NO.	Diametral Pitch	Cutter No.	Diameter of Cutter (D)	Diameter of Hole (H)
-153	6	1	3-1/8	1
-154	6	2	3-1/8	1
-155	6	3	3-1/8	1
-156	6	4	3-1/8	1
-157	6	5	3-1/8	1
-158	6	6	3-1/8	1
-159	6	7	3-1/8	1
-160	6	8	3-1/8	1
-185	7	1	2-7/8	1
-186	7	2	2-7/8	1
-187	7	3	2-7/8	1
-188	7	4	2-7/8	1
-189	7	5	2-7/8	1
-190	7	6	2-7/8	1
-191	7	7	2-7/8	1
-192	7	8	2-7/8	1
-209	8	1	2-7/8	1
-210	8	2	2-7/8	1
-211	8	3	2-7/8	1
-212	8	4	2-7/8	1
-213	8	5	2-7/8	1
-214	8	6	2-7/8	1
-215	8	7	2-7/8	1
-216	8	8	2-7/8	1
-233	9	1	2-3/4	1
-234	9	2	2-3/4	1
-235	9	3	2-3/4	1
-236	9	4	2-3/4	1
-237	9	5	2-3/4	1
-238	9	6	2-3/4	1
-239	9	7	2-3/4	1
-240	9	8	2-3/4	1
-249	10	1	2-3/8	7/8
-250	10	2	2-3/8	7/8
-251	10	3	2-3/8	7/8
-252	10	4	2-3/8	7/8
-253	10	5	2-3/8	7/8
-255	10	7	2-3/8	7/8
-256	10	8	2-3/8	7/8
-262	10	6	2-3/4	1

(B) CANCELED after 31 March 1981. For procurement use American National Standards Institute ANSI B94.19.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/2094

APPROVED 29 Oct 57 REVISED (A) 30 Mar 77 (B) 31 Mar 81

Review activity:
DLA-CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection of all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AL Other Cust 99	TITLE CUTTERS, MILLING, INVOLUTE GEAR, 14-1/2 DEGREE PRESSURE ANGLE	MILITARY STANDARD MS15701
PROCUREMENT SPECIFICATION GGG-C-755	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1 (Continuation) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Project No. 3455-0073

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:50Z
Check the source to verify that this is the current version before use.