FED. SUP CLASS
6610

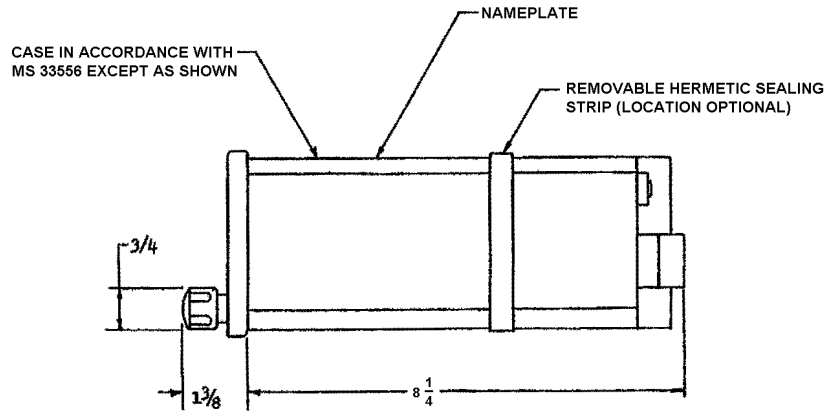

SIDE

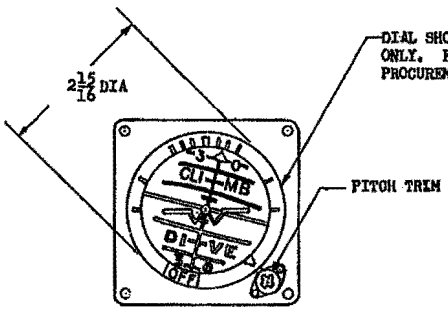

FRONT

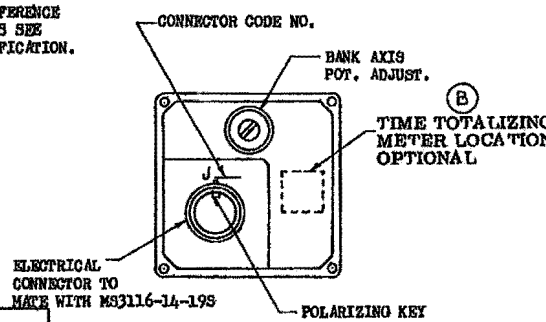

REAR

MS PART NO.
MS 17400-1

CONNECTOR TABLE

ELECTRICAL PINS	CONNECTIONS
A	115 V 400 cps neutral
B	115 V 400 cps single-phase power
D, E, F	Stator leads for roll synchro control device
R, H, P	Stator leads for pitch synchro control device
J	Power failure warning (connect to pin A to complete circuit)
K, L	Internal lighting power input 5 volts (ac or dc)
M	Pitch null test terminal (pitch error voltage between this pin and pin A)
N	Roll null test terminal (pitch error voltage between this pin and pin A)
C-G-S	No connections
T-U-V	

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: FRACTIONS $\pm 1/16$ DECIMALS $\pm$ 0.005 .
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 1 JUNE 1962 REVISED (A) 15 NOV. 1962 (B) 15 JULY 1964

P.A. Navy - Wep Other Cust	TITLE INDICATOR, ATTITUDE, REMOTE 3 INCH CASE	MILITARY STANDARD MS 17400 (WEP)
PROCUREMENT SPECIFICATION MIL-I-23084 (WEP)	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:08Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 57 672-1 (Limited coordi