When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS, 5310

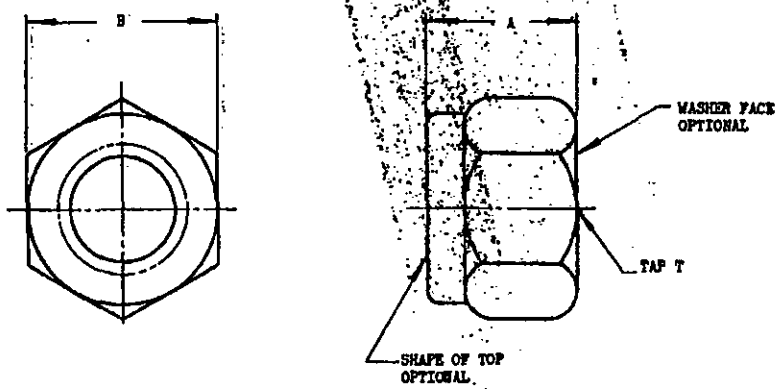

FINE THREAD

DASH NUMBER			TAP T	(a) A +.016	B +.002 -.010
STEEL	COPPER BASE ALLOY	AL ALLOY			
-1032	B1032	D1032	NO. 10-32 NF-3	.234	.375
- 428	B428	D428	1/4-28 NF-3	.322	.438
- 524	B524	D524	5/16-24 NF-3	.385	.500
- 624	B624	D624	3/8-24 NF-3	.453	.563
- 720	B720	D720	7/16-20 NF-3		.625
- 820	B820	D820	1/2-20 NF-3	.594	.750
- 918	B918	D918	9/16-18 NF-3	.688	.875
-1018	B1018	D1018	5/8-18 NF-3	.750	.938
-1216	B1216	D1216	3/4-16 NF-3	.875	1.063
-1414	B1414	D1414	7/8-14 NF-3	1.000	1.250
-1614	B1614	D1614	1 -14 NF-3	1.125	1.438
-1812	B1812	D1812	1- 1/8-12 NF-3	1.250	1.625
-2012	B2012	D2012	1- 1/4-12 NF-3	1.438	1.813

COARSE THREAD

- 440	B440	D440	NO. 4-40 NC-2	.141	.250
- 632	B632	D632	NO. 6-32 NC-2	.172	.312
- 832	B832	D832	NO. 8-32 NC-2	.234	.344

(a) MINIMUM A NOT SPECIFIED. LIMITED ONLY BY STRENGTH REQUIREMENT OF SPECIFICATION.

ADD A AFTER DASH NUMBER FOR NUTS HAVING NONMETALLIC INSERTS.

ADD C AFTER DASH NUMBER FOR NUTS FABRICATED ENTIRELY FROM METAL.

EXAMPLES OF PART NUMBERS: MS20365-428 = 1/4-28 STEEL NUT, EITHER ALL METAL OR WITH NONMETALLIC INSERT.
MS20365D428 = 1/4-28 ALUMINUM-ALLOY NUT, EITHER ALL METAL OR WITH NONMETALLIC INSERT.
MS20365B428A = 1/4-28 COPPER-BASE-ALLOY NUT WITH NONMETALLIC INSERT.
MS20365-428C = 1/4-28 STEEL, ALL METAL NUT.

DIMENSIONS IN INCHES.

(B) FOR INSTALLATION, SEE STANDARD MS33588.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 3 Jan 57 REVISED (A) 19 Feb 57 (B) 16 Apr 57

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS20365 (ASG)
Navy - BuAer Air Force	A - N - AF -	NUT, SELF-LOCKING, 250°F	
PROCUREMENT SPECIFICATION AN-N-5		SUPERSEDES: AN365	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:22Z
Check the source to verify that this is the current version before use.