FED. SUP CLASS 4730

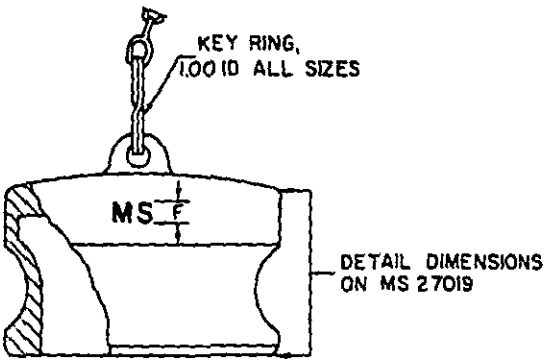

DASH NUMBER	CLASS NUMBER		NOM. SIZE	SASH CHAIN		DIMENSION
	CLASS 1	CLASS 2		NO. LINKS	LINK SIZE	F
-1	X		1/2	19	35	.125
-2		X				
-3	X		3/4	19	35	.125
-4		X				
-5	X		1	19	35	.125
-6		X				
-7	X		1-1/4	19	35	.25
-8		X				
-9	X		1-1/2	19	35	.25
-10		X				
-11	X		2	19	35	.25
-12		X				
-13	X		2-1/2	19	35	.25
-14		X				
-15	X		3	19	35	.25
-16		X				
-17	X		4	19	35	.25
-18		X				
-19	X		6	19	35	.25
-20		X				

NOTES:

(E) 1. MATERIAL
   a. BODY
      CLASS 1 ALUMINUM - QQ-A-601, ALLOYS 356.0-T6, 712.0-T5 OR 713.0-T5.
      CLASS 2 BRASS - QQ-C-390, ALLOY 836,844 or 922; OR BRASS, QQ-B-626, COPPER ALLOY 377.
   b. RINGS, WIRE - SPRING STEEL.
   c. CHAIN, SASH - RR-C-271, BRONZE, TYPE II, CLASS 3, TRADE NO. AS SPECIFIED IN TABLE UNDER LINK SIZE.
2. FINISH
   a. BODY
      CLASS 1 ALUMINUM - MIL-A-8625, ANODIC COATING, TYPE II, CLASS 1 .
      CLASS 2 BRONZE OR BRASS - PLAIN
   b. RINGS - QQ-P-416, CADMIUM PLATE, TYPE II, CLASS 2 ,
3. BURRS AND ALL FOREIGN MATERIAL SHALL BE REMOVED.
4. HYDROSTATIC TEST PRESSURE - 1/2 THROUGH 4 INCH, 300 P.S.I., 6 INCH, 150 P.S.I.
5. WORKING PRESSURE - 1/2 THROUGH 4 INCH, 150 P.S.I., 6 INCH, 75 P.S.I.
6. DIMENSIONS - IN INCHES. NOMINAL UNLESS OTHERWISE SPECIFIED.
7. PART NUMBER - THE MS PART NUMBER CONSISTS OF THE MS SHEET NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS27029-1.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
9. FOR DESIGN FEATURE PURPOSE, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

NOTE:

CERTAIN PROVISIONS (DIMENSIONS) OF THIS DOCUMENT ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (STANAG NO. 2761 AND QSTAG 240). WHEN CHANGE NOTICE, REVISION, OR CANCELLATION OF THIS DOCUMENT IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY SHALL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

(E) DENOTES CHANGES

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY-ME Other Cust NAVY-YD A. F. - 99	STANAG NO. 2761 QSTAG 240	COUPLING HALF, QUICK DISCONNECT, CAM-LOCKING TYPE, PLUG, DUST, TYPE I	MS 27029
PROCUREMENT SPECIFICATIONS MIL-C-27487	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 SEP 87 672-1 — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. — 4730-0605

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

REVIEW ACTIVITIES: ARMY - AV, GL; AIR FORCE-82; DLA-CS

USER ACTIVITIES: ARMY - AT; NAVY - MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 25 SEPTEMBER 1980 (E) 4 OCTOBER 1985 (D) 16 JULY 1980 (E) 19 AUGUST 1975 (C) 26 FEBRUARY 1970 (B) 2 AUGUST 1966 (A)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:13Z
Check the source to verify that this is the current version before use.