NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP. CLASS
6240

This standard establishes the overall dimensions and detail engineering requirements for mercury vapor lamps, type VG-15. The item covered hereon is standard for use in the design of new equipment procured by the Bureau of Ships.

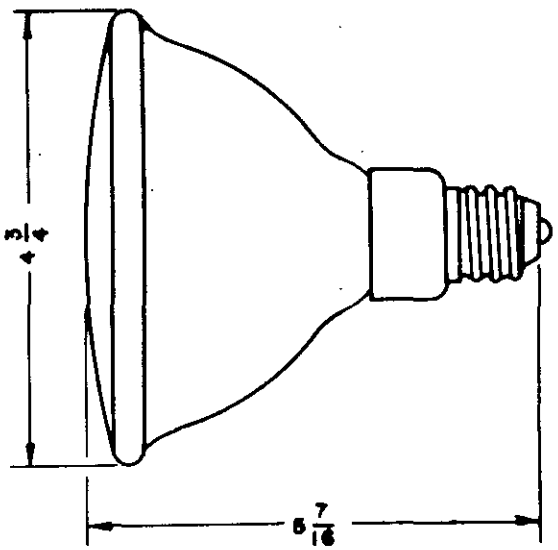

Characteristic	Type VG-15
Industry number	E-H4
Watts	100
Volts (circuit)	115-230
Bulb	Par-38
Finish	Reflector opaque outside-coated and clear lens filter required.
Base	Admedium skirt
Electrodes	3
Gas	Mercury vapor
Overall length (max. inches)	5-7/16
Hours life (approximate)	1000
Use	"Black light" source on aircraft carriers.

Ⓐ CANCELED AFTER 23 JULY 1984.
NO SUPERSEDING STANDARD.

APPROVED 2 AUG 1954 REVISED Ⓐ 23 JULY 1984

MS part number	FIIN
MS15619-1	184-5823

CUSTODIANS	OTHER INT.
Ships	A - N - AF -

MILITARY STANDARD

LAMP, MERCURY VAPOR, (ULTRAVIOLET) PAR-38, ADMEDIUM SKIRT

MS15619
(SHIPS)

Procurement Specification

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672
1 OCT 52

A03433

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:49Z
Check the source to verify that this is the current version before use.