FED. SUP CLASS
5935

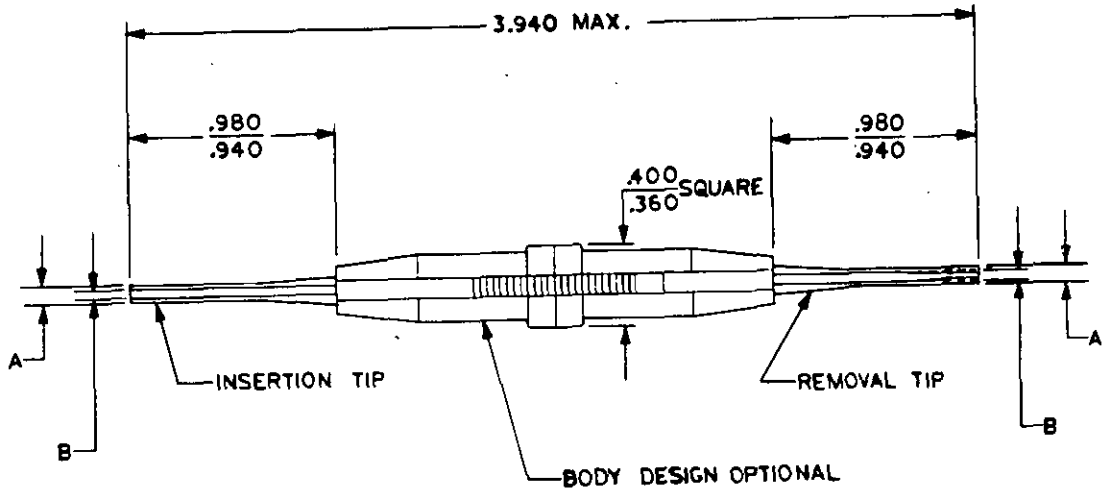

CONTACT SIZE	A DIA.	B DIA.	COLOR CODE (BODY)	
			INSERTION	REMOVAL
22	.074 .070	.054 .052	BLACK	WHITE
20	.085 .081	.073 .071	GREEN	WHITE
16	.134 .128	.114 .110	BLUE	WHITE

NOTES:
1. Materials –
   Body – Molded Acetal or equivalent.
   Tips – Metal, Treated to resist corrosion.
2. Dimensions in inches.
3. Slot design shall allow all applicable wire sizes to fit into tool freely.
4. The insertion and removal handle ends shall be color coded as shown in table.
5. Part number shall be permanently marked along major surface of tool handle.
6. For use with MIL-C-81659 Connectors, Series 2.
7. Example of part number: MS3156-20.

Ⓐ CANCELED AFTER 20 JUNE 1979 USE MIL-I-81969/1 FOR CONTACT SIZE 22, 20, 16

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Reviewer Activity
NAVY- EC

APPROVED 21 July 1971 REVISED Ⓐ 20 JUNE 1979

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY-AS Other Cust	TITLE TOOL, INSERTION AND REMOVAL, CONTACT, MIL-C-81659 CONNECTOR (SERIES 2)	MILITARY STANDARD MS 3156 (NAVY)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 67 672-1N LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-N750-61

☆U.S. GOVERNMENT PRINTING OFFICE: 1979—603-022/2796