FSC. SUP CLASS. 5330

MS9058

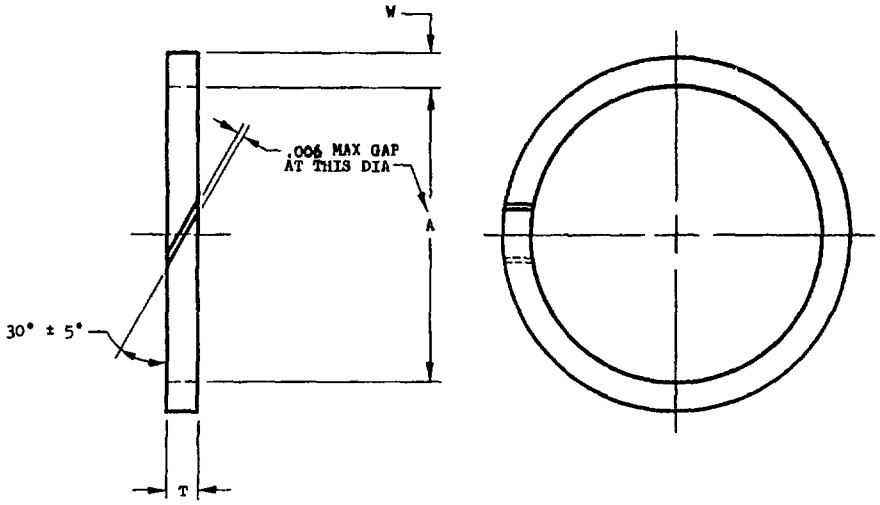

PART NO.	NOM TUBE OD	A BASIC	W ± 002	T ± 004	APPROX WEIGHT LB/100
MS9058-02	.125	246	112	056	056
MS9058-03	188	309	112	056	.066
MS9058-04	250	360	117	061	.085
MS9058-05	.312	423	117	061	096
MS9058-06	.375	478	121	061	.110
MS9058-07	.438	549	.121	.061	.120
MS9058-08	.500	656	125	.061	149
MS9058-09	562	718	125	061	162
MS9058-10	625	769	.131	073	.216
MS9058-11	.688	.878	159	.073	300
MS9058-12	750	941	169	073	342
MS9058-14	.875	1.066	169	073	381
MS9058-16	1.000	1 191	169	.073	419
MS9058-18	1.125	1.378	169	073	477
MS9058-20	1 250	1.503	169	073	515
MS9058-24	1 500	1 752	.169	073	592
MS9058-28	1 750	2 127	.169	.073	.707
MS9058-32	2 000	2 377	169	073	784

Ⓒ STANDARD REACTIVATED IO JUNE 1969

MATERIAL POLYTETRAFLUOROETHYLENE AMS 3651

ELDES TO BE CUT CLEAN AND SQUARE WITHIN 5°

DIMENSIONS IN INCHES

DO NOT USE UNASSIGNED PART NUMBERS

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE & PROPELLER QUALITY PARTS COMMITTEE OF THE SAE.

APPROVED 22 May 56 REVISED ④ 15 Nov 57 Ⓑ 3 Jan 65 Ⓒ 10 June 69

User activities: Review activities: USAF - 82, 85

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for requisitions now shall be made from this document.

PA: USAF - 11 Other Cust: Army - AV Navy - AS

PROCUREMENT SPECIFICATION NONE

MILITARY STANDARD

RING-BACK-UP, 2033 CONNECTION, AMS 3651

MS9058

SUPERSEDES: MS9484 Ⓒ

SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969 341-520/A-7472

5330-0355

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:09Z
Check the source to verify that this is the current version before use.