FED SUP CLASS
5340

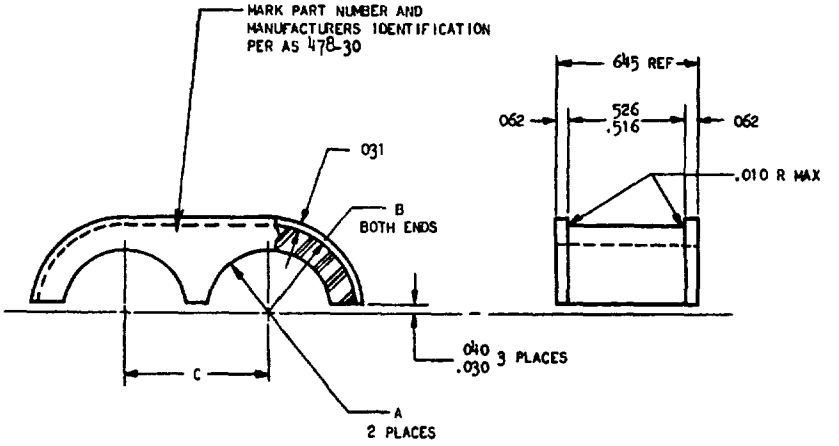

PART NO.	NOMINAL TUBE SIZE	A RAD +.010 −.000	B RAD ± 005	C ±.005	APPROX WEIGHT LB/100
MS9515-01	.125	062	125	.188	.236
MS9515-02	.188	094	156	.250	.343
MS9515-03	250	.125	219	344	.707
MS9515-04	312	156	.250	406	.943
MS9515-05	375	188	.281	.469	1.098
MS9515-06	438	219	.312	531	1.213
MS9515-07	.500	250	375	.625	1.848
MS9515-08	.562	281	.406	688	2.088
MS9515-09	625	.312	.438	.750	2.319
MS9515-10	688	.344	469	.812	2.567
MS9515-11	750	375	500	.875	2.819
MS9515-12	812	406	531	.938	3.134
MS9515-13	875	.438	562	1 000	3.337
MS9515-14	938	469	594	1.062	3.593
MS9515-15	1.000	500	625	1.125	3.878

.1 MATERIAL. FABRIC, WIRE REINFORCED ASBESTOS, POLYTETRAFLUOROETHYLENE IMPREGNATED, SINTERED, AMS 3839

2 DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES· LINEAR DIMENSIONS ±.010.

3 DO NOT USE UNASSIGNED PART NUMBERS

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS MILITARY STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

P.A USAF - 11 Other Cust Navy - AS	TITLE CUSHION, LOOP CLAMP - MULTIPLE, 2-TUBE, AMS 3839	MILITARY STANDARD MS 9515 (ASG)
PROCUREMENT SPECIFICATION None	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

*U.S. GOVERNMENT PRINTING OFFICE: 1967-761-610-/761

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities
USAF - 11
Navy - AS

REVISED 17 April 67

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.