
FED. SUP CLASS
2995

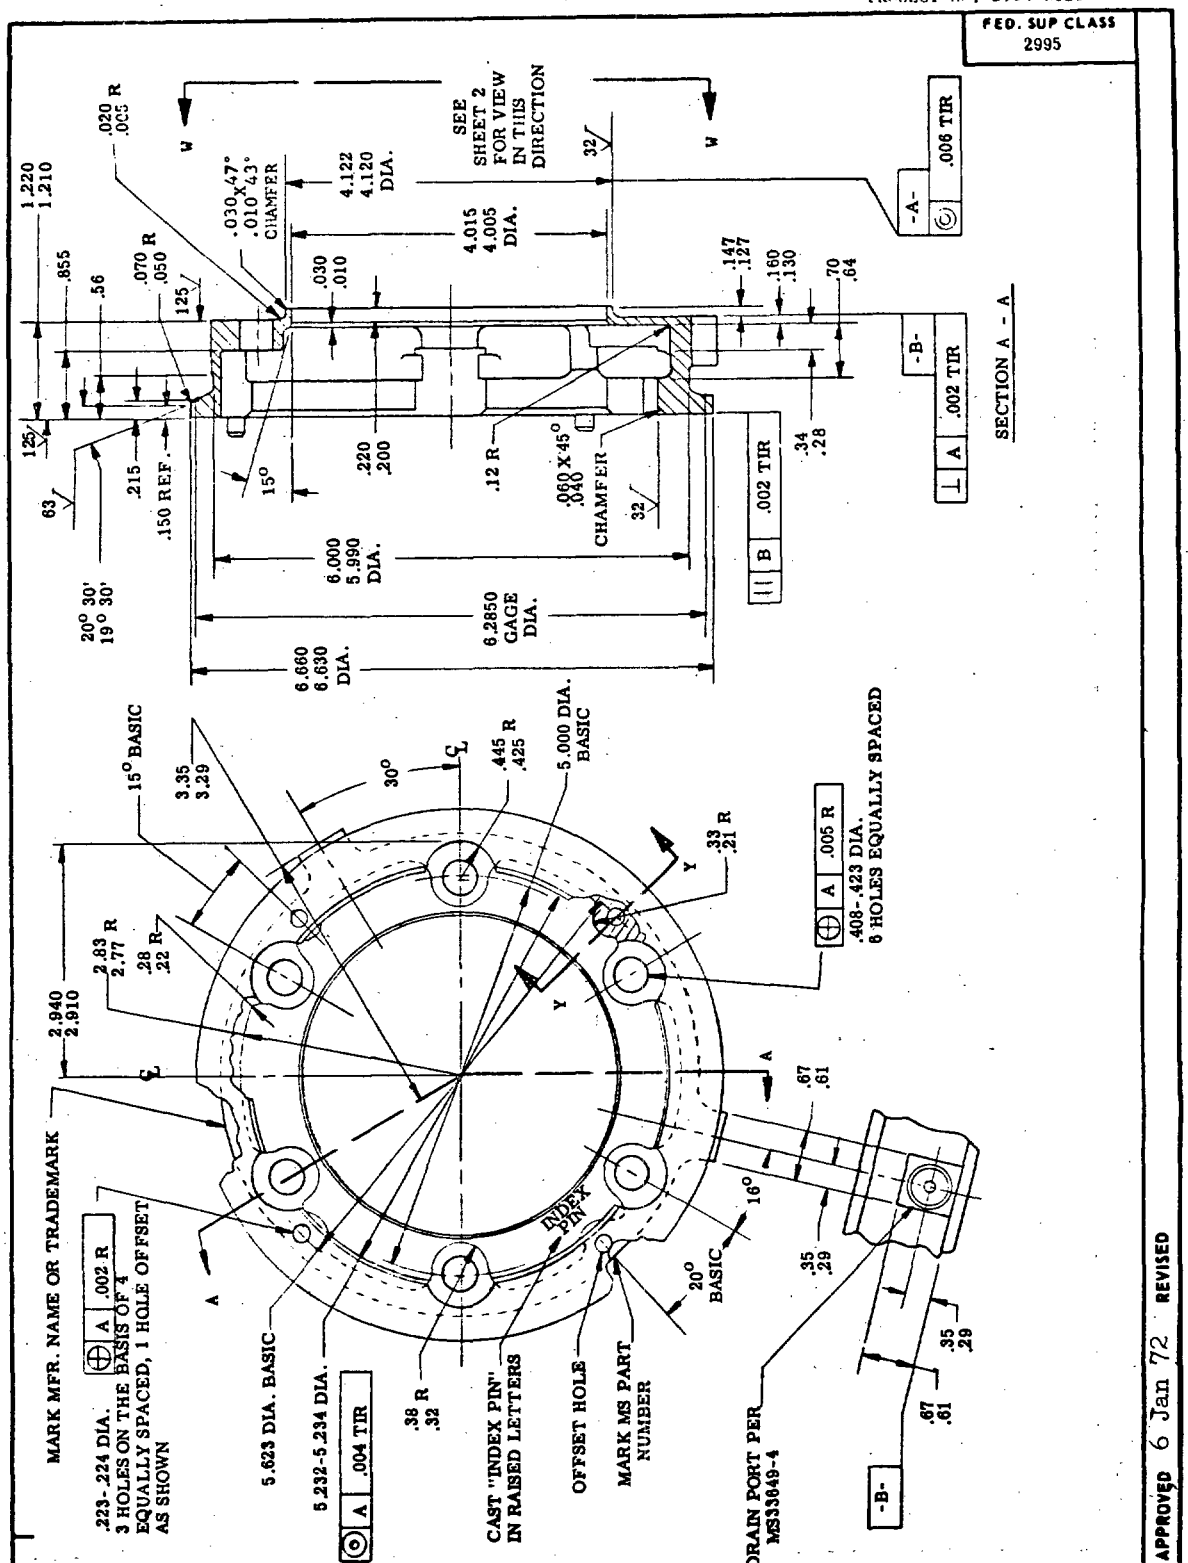

APPROVED 6 Jan 72 REVISED

P.A. NAVY - AS
Other Cost

TITLE
ADAPTER - AIR TURBINE STARTER TO ENGINE, MOUNTING

MILITARY STANDARD
MS14117(AS)

PROCUREMENT SPECIFICATION

SUPERSEDES:

SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLE

PLATE NO. 17709

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 672-1 (Effective coordination)

P.A. NAVY - AS
Other Cand

PROCUREMENT SPECIFICATION

SUPERSEDES:

TITLE
ADAPTER-AIR TURBINE STARTER TO ENGINE, MOUNTING

MILITARY STANDARD
MS14117(AS)


SHEET 2


PLATE NO. 17700

DASH NO.	DRAIN PORT PROVISIONS
-1	NONE
-2	FINISHED BOSS AT BOTH LOCATIONS

NOTES:

1. MATERIAL: ALUMINUM ALLOY NO. C355 PER MIL-A-21180C.
2. ANODIZE PER MIL-A-8625; HARDCOAT INDICATED SURFACE PER TYPE III, COAT ALL OTHER SURFACES PER TYPE II.
3. INSPECT CASTING PER MIL-C-6021, CLASS 2A, GRADE C.
4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: 3 PLACE DECIMALS ±.005, 2 PLACE DECIMALS ±.01, ANGLES ±1°.
5. FILLETS TO BE .09 TO .15 UNLESS OTHERWISE SPECIFIED.
6. BREAK EDGES .003 -.015 UNLESS OTHERWISE SPECIFIED.
7. SURFACE TEXTURE IN ACCORDANCE WITH ASA B46.1-1962. (ANSI)
8. INSTALL WITH WET MIL-P-8585 PRIMER AS PACKAGED-UNDILUTED.

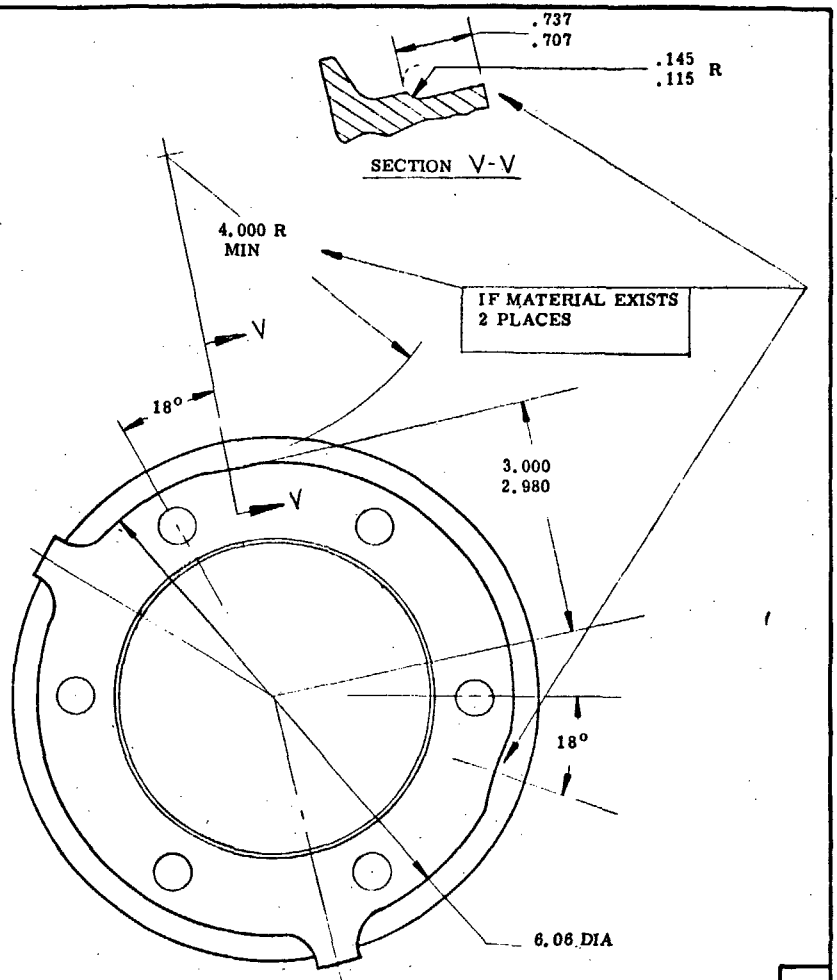

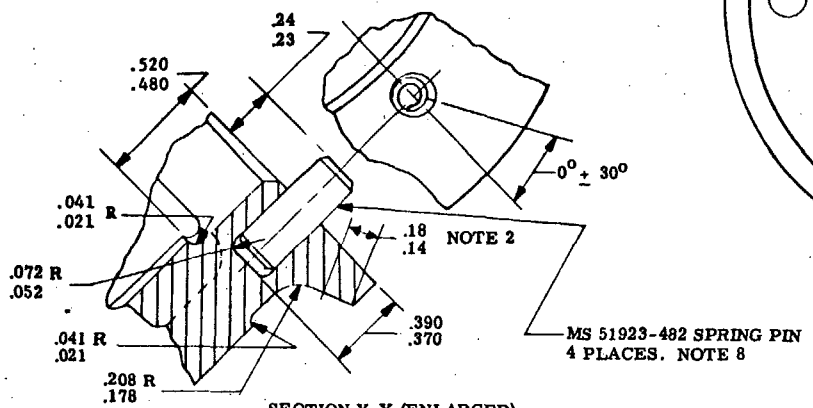

SECTION Y-Y (ENLARGED)

APPROVED 6 Jan 72 REVISED

FED. SUP CLASS 2995

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.