THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: ASME/ANSI B18.3

Form Approved
OMB No. 0704-0188

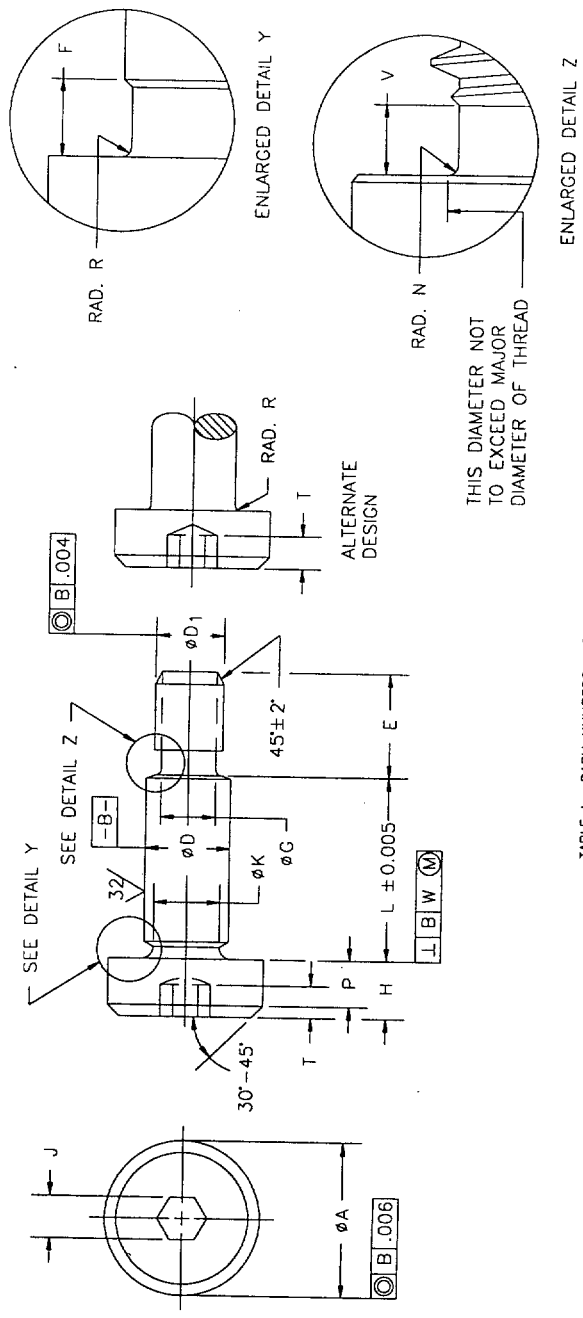


TABLE I. DASH NUMBERS AND DIMENSIONS

NOMINAL SIZE OR BASIC SHOULDER DIAMETER	ØD SHOULDER DIAMETER MAX	ØD SHOULDER DIAMETER MIN	ØA HEAD DIAMETER MAX	ØA HEAD DIAMETER MIN	H HEAD HEIGHT MAX	H HEAD HEIGHT MIN	P HEAD SIZE HEIGHT MIN	J HEXAGON SOCKET SIZE NOM	T KEY ENGAGEMENT MIN	R HEAD FILLET RADIUS MIN	ØX SHOULDER NECK DIAMETER MIN	F SHOULDER NECK WIDTH MAX	ØD1 NOMINAL THREAD SIZE OR BASIC THREAD DIAMETER	ØD1 UNC-3A THREADS/ INCH	ØG THREAD NECK DIAMETER MAX	ØG THREAD NECK DIAMETER MIN	V THREAD NECK WIDTH MAX	N THREAD NECK FILLET MAX	N THREAD NECK FILLET MIN	E THREAD LENGTH MAX	E THREAD LENGTH MIN	W TOLERANCE
.375	.373	.371	.562	.543	.250	.240	.209	.188	.141	.015	.352	.093	.3125	18	.249	.237	.111	.031	.025	.500	.480	.003
.500	.498	.496	.750	.729	.312	.302	.262	.250	.188	.020	.477	.093	.3750	16	.304	.291	.125	.035	.029	.625	.595	.004
.625	.623	.621	.875	.853	.375	.365	.315	.312	.234	.024	.602	.093	.5000	13	.414	.397	.154	.042	.036	.750	.720	.004

(B) ENTIRE SPECIFICATION REVISED

INCH-POUND

PREPARING ACTIVITY: DLA-IS
CUSTODIANS: ARMY- ER NAVY- YD
AIR FORCE- 99 DLA-
REVIEW: AR, GL, NS, MC, FSS, 82
USER: --
PROJECT NUMBER: 5305-2082

MILITARY SPECIFICATION SHEET

TITLE

SCREW, SHOULDERED, HEX-SOCKET HEAD
.375, .500, .625 UNC-3A, UNPLATED

SPECIFICATION SHEET NUMBER
MS21301 27 JUN 95 REV B

SUPERSEDING
MS21301A 21 DEC 87

AMSC- N/A FSC 5305

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:31Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: ASME/ANSI B18.3

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

TBALE II. DASH NUMBERS AND DIMENSIONS

NOMINAL SIZE SHOULDERED DIAMETER		.375	.500	.625
THREAD SIZE		.3125-18 UNC-3A	.375-16 UNC-3A	.500-13 UNC-3A
L SHOULDER LENGTH	TOLERANCE	DASH NO	DASH NO.	DASH NO.
1.00	±.005	-1		
1.25		-2	-27	
1.50		-3	-29	-59
1.75		-5	-31	-61
2.00		-7	-33	-63
2.25		-9	-35	-65
2.50		-11	-37	-67
2.75		-13	-39	-69
3.00		-15	-41	-71
3.25		-17	-43	-73
3.50		-19	-45	-75
3.75		-21	-47	-77
4.00		-23	-49	-79
4.25		-25	-51	-81
4.50			-53	-83
4.75			-55	-85
5.00			-57	-87
5.50				-89
6.00				-91

REQUIREMENTS:

1. MATERIAL: MATERIAL SHALL BE ALLOY STEEL GRADE 4340 (UNS G43400) IN ACCORDANCE WITH AMS 6415 OR MIL-S-5000.
2. PROTECTIVE COATING: UNCOATED (NONE).
3. THREADS: THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 22.
4. TENSILE STRENGTH: ULTIMATE TENSILE STRENGTH SHALL BE 140 KSI, BASED ON THE MINIMUM THREAD NECK AREA.
5. HARDNESS: HARDNESS SHALL BE IN THE RANGE OF 32 TO 43 HRC.
6. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE II.

EXAMPLE: MS21301 -5
DASH NUMBER
BASIC MS NUMBER

MS21301-5 INDICATES - SCREW, SHOULDER, HEX-SOCKET HEAD, .375 SHOULDER DIAMETER; .3125-18 UNC-3A THREAD SIZE; 1.50 SHOULDER LENGTH.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES. INTERPRET DIMENDIONS AND TOLERANCES IN ACCORDANCE WITH ANSI Y14.5M.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE.
3. UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICATION.
4. SEE MS51975 FOR CADMIUM PLATED ALLOY STEEL SCREWS AND MS51576 FOR CRES SCREWS.

PREPARING ACTIVITY: DLA-IS
CUSTODIANS: ARMY- ER NAVY- YD
AIR FORCE- 99 DLA-
REVIEW: AR, GL, NS, MC, FSS, 82
USER: --
PROJECT NUMBER: 5305-2082

MILITARY SPECIFICATION SHEET

TITLE

SCREW, SHOULDERED, HEX-SOCKET HEAD .375, .500, .625 UNC-3A, UNPLATED

SPECIFICATION SHEET NUMBER
MS21301
27 JUN 95
REV B

SUPERSEDING
MS21301A 21 DEC 87

AMSC- N/A FSC 5305

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:31Z
Check the source to verify that this is the current version before use.