
FED. SUP CLASS
4730

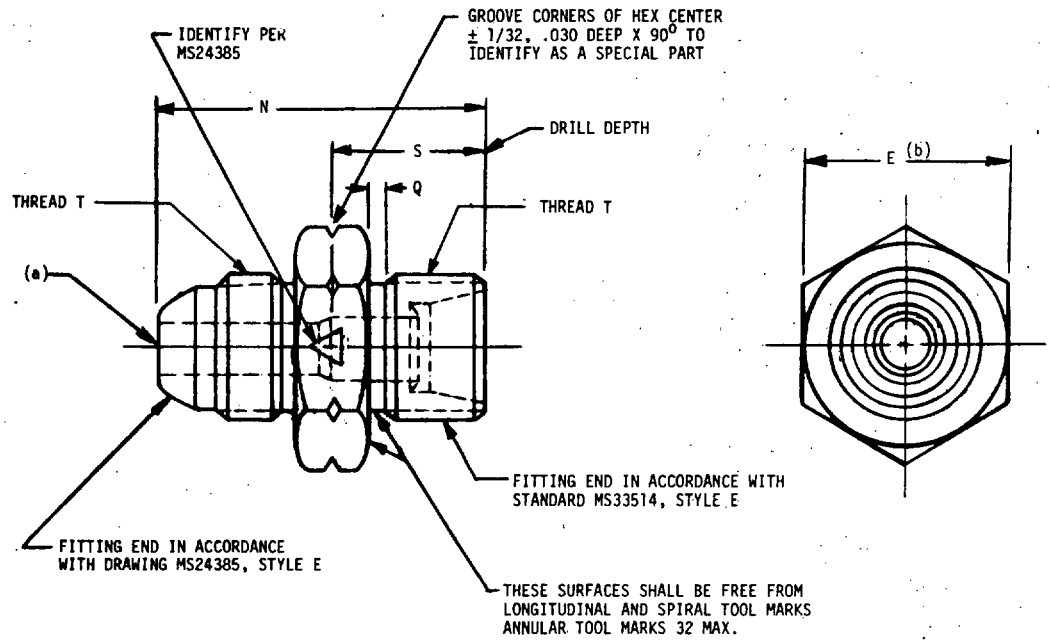

DASH NO.	TUBE OD	THREAD T MIL-S-8879	E (b) (Ref)	N ± 1/64	S ± 1/32	Q + .010 - .000	WT LB MAX STEEL	AL ALLOY	TI ALLOY
-3	3/16	.3750-24 UNJF-3A	5/8	1-5/32	Thru	.093	.044	.015	.025
-4	1/4	.4375-20 UNJF-3A	11/16	1-17/64	9/16	.109	.053	.019	.030
-5	5/16	.5000-20 UNJF-3A	3/4	1-17/64	Thru		.060	.021	.034
-6	3/8	.5625-18 UNJF-3A	13/16	1-9/32		.125	.073	.026	.042
-8	1/2	.7500-16 UNJF-3A	1	1-15/32	11/16	.140	.133	.046	.076
-10	5/8	.8750-14 UNJF-3A	1-1/8	1-11/16	25/32		.182	.065	.105
-12	3/4	1.0625-12 UNJ -3A	1-3/8	1-15/16	7/8	.156	.305	.109	.175
-16	1	1.3125-12 UNJ -3A	1-5/8	1-31/32	27/32		.414	.145	.328
-20	1-1/4	1.6250-12 UNJ -3A	1-7/8	2	7/8		.625	.209	.360
-24	1-1/2	1.8750-12 UNF -3A	2-1/8	2-5/32			.820	.280	.473
-32	2	2.5000-12 UNJ -3A	2-3/4	2-15/32	29/32		1.596	.510	.920

(a) AT THE OPTION OF THE MANUFACTURER, THE SMALLER DIAMETER MAY BE DRILLED THROUGH THE FITTING FROM END TO END.

(b) FOR HEX DIMENSIONS AND TOLERANCES AND TOLERANCES SEE MS24385, STYLE E.

APPROVED 1 MAR 60 REVISED (C) 26 JUNE 1981

(C) REVISED & REDRAWN

P.A.		TITLE	MILITARY STANDARD
NAVY - AS Other Cust USAF-99 ARMY-AV	INTER-NATIONAL INTEREST SEE NOTE 7	ADAPTER, FLARELESS TUBE TO FLARED TUBE PRECISION TYPE	MS 24405
PROCUREMENT SPECIFICATION MIL-F-18280		SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 23065

PROJECT NO. 4730-0171

REVIEWER SYMBOLS:
USAF - 11, 69
ARMY - AR, MI
DLA - CS

USER SYMBOLS:
NAVY - OS
ARMY - GL, CR, ME, AT

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:54Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
NAVY - OS
ARMY - GL,CR,ME,AT

REVIEWER SYMBOLS:
USAF - 11,69
ARMY - AR,MI
DLA - CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
4730

NOTES:

1. MATERIAL: SEE PROCUREMENT SPECIFICATION.
2. FINISH: SEE PROCUREMENT SPECIFICATION.
3. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ± 1/64, ANGLES ± 1/2°.
4. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.
5. PART NUMBERS:

   NO CODE LETTER IN PART NUMBER FOR CARBON STEEL.

   ADD W IN PLACE OF DASH FOR ALUMINUM ALLOY.
   ADD J IN PLACE OF DASH FOR CORROSION RESISTANT STEEL TYPE 304.
   ADD K IN PLACE OF DASH FOR CORROSION RESISTANT STEEL TYPE 316.
   ADD S IN PLACE OF DASH FOR CORROSION RESISTANT STEEL TYPE 347.
   ADD T AFTER DASH NUMBER FOR TITANIUM ALLOY (6AL-4V).

   EXAMPLE OF PART NUMBER:

   MS24405-4 - ADAPTER, 1/4 TUBING, CARBON STEEL.

   MS24405W4 - ADAPTER, 1/4 TUBING, ALUMINUM ALLOY (7075).
   MS24405J4 - ADAPTER, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 304.
   MS24405K4 - ADAPTER, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 316.
   MS24405S4 - ADAPTER, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 347.
   MS24405-4T - ADAPTER, 1/4 TUBING, TITANIUM ALLOY (6AL-4V).

6. TITANIUM NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.
7. CERTAIN PROVISIONS (SCREW THREADS, HEXAGON SIZE AND UNDERCUT DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/15. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.
8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 1 MAR 60 REVISED (C) FOR CHANGES SEE SHEETS 1 & 2

P.A. NAVY - AS Other Cust USAF-99 ARMY-AV	INTER-NATIONAL INTEREST SEE NOTE 7	TITLE ADAPTER, FLARELESS TUBE TO FLARED TUBE PRECISION TYPE	MILITARY STANDARD MS 24405
PROCUREMENT SPECIFICATION MIL-F-18280		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 23085

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:54Z
Check the source to verify that this is the current version before use.