
FED. SUP CLASS
5935

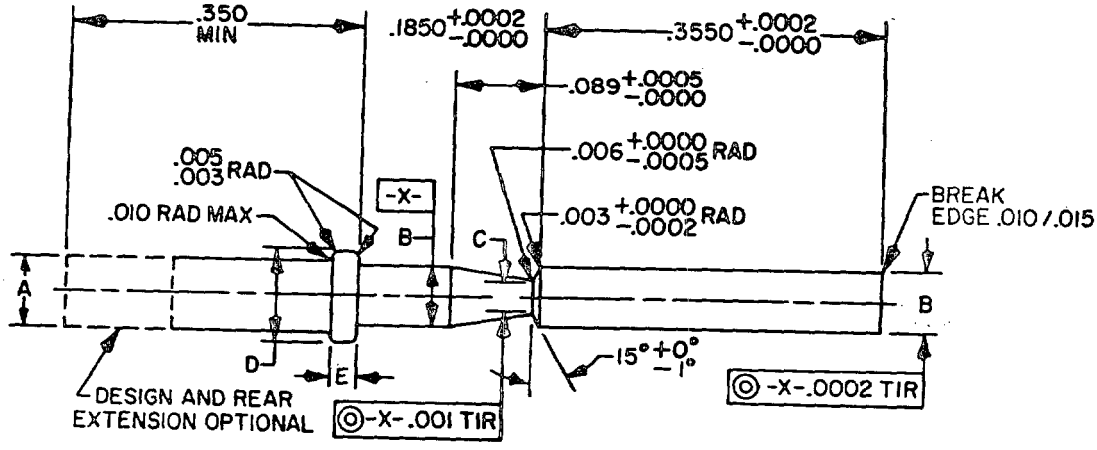

DASH NUMBER	A DIA	B +.0002 -.0000	C +.0000 -.0005	D DIA +.0000 -.0005	E
-20S	.078 .076	.0760	.0520	.1030	.033 .029
-16S	.105 .101	.1100	.0870	.1480	.048 .044
-12S	.153 .147	.1580	.1350	.2020	.048 .044

GAGE FOR SOCKET CONTACT LOCATION AND CONTACT RETENTION TESTS.

APPROVED 1 Apr 71 REVISED (A) 5 SEPT 1975

(A) Entire standard revised

User activities: Army AV, Navy, Air Force


Reviewer activities: Army MU, MI, EL; Navy EC; Air Force 11, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy - AS	International interest	TITLE: TEST GAGE, MIL-C-26482 SERIES 1 OR MIL-C-81703 SERIES 2 CONTACT RETENTION FEATURE	MILITARY STANDARD
Other Cust: Army - EL; AF - 85			MS 3460
Procurement Specification		SUPERSEDES: MS3460 (NAVY)	SHEET 1 OF 2

DD FORM 1 SEP 63 672 (Coordinated) previous editions are obsolete 5935-1947-33

Source: https://assist.dla.mil - Downloaded: 2026-10-23T13:50:27
Check the source to verify that this is the current version before use.

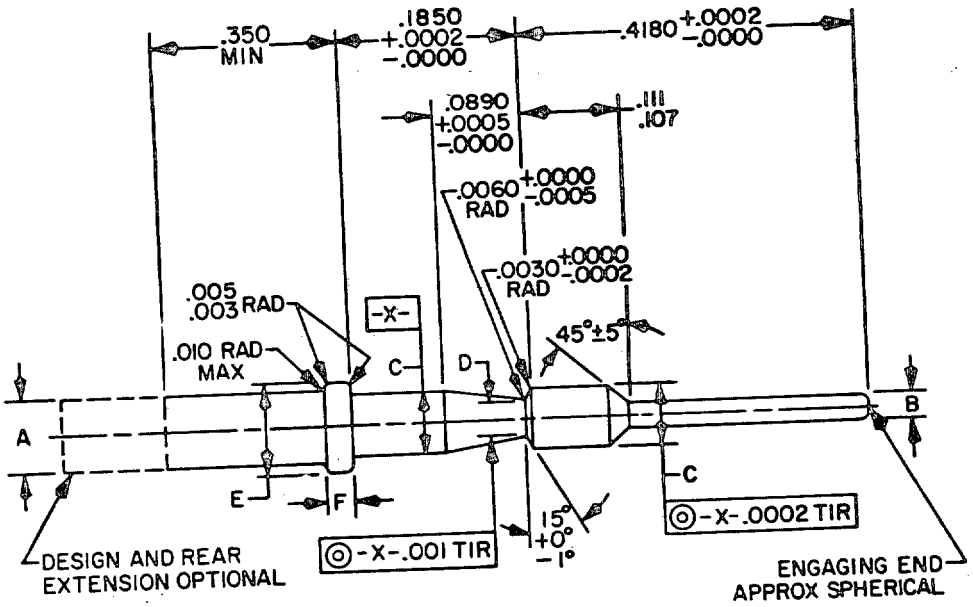

DASH NUMBER	A DIA	B DIA	C +.0002 -.0000	D +.0000 -.0005	E DIA +.0000 -.0005	F
-20P	.078 .076	.041 .039	.0760	.0520	.1030	.033 .029
-16P	.105 .101	.0635 .0615	.1100	.0870	.1480	.048 .044
-12P	.153 .147	.095 .093	.1580	.1350	.2020	.048 .044

GAGE FOR PIN CONTACT LOCATION AND CONTACT RETENTION TESTS.

1. DIMENSIONS ARE IN INCHES.
2. MATERIAL: STEEL
3. FINISH: 32 MICROINCH POLISHED.-
4. EXAMPLE OF PART NUMBER:

MS3460 - 12S
BASIC PART NO. — DASH NUMBER

5. UNLESS OTHERWISE SPECIFIED, ALL DIAMETERS TO BE CONCENTRIC TO - X - WITHIN .002 TIR.
6. PART TO BE FREE OF ALL BURRS AND SHARP EDGES .003 TO .005 RADIUS UNLESS OTHERWISE NOTED.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 1 Apr 71 REVISED (A) Entire standard revised

User activities: Army: AV Navy Air Force

Reviewer activities: Army MU, MI, EL Navy EC, SH Air Force 11, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy - AS	International interest	TITLE	MILITARY STANDARD
Other Cust Army - EL AF - 85		TEST GAGE, MIL-C-26482 SERIES 1 OR MIL-C-81703 SERIES 2 CONTACT RETENTION FEATURE	MS 3460
Procurement Specification		SUPERSEDES: MS3460 (NAVY)	SHEET 2 OF 2

DD FORM 1 SEP 63 672 (Coordinated) SUPERSEDES PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-1947-33

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.