MIL-C-29184/1B is inactive for new design as of 16 April 2001.

INCH-POUND

MIL-C-29184/1B
9 December 1991
SUPERSEDING
MIL-C-29184/1A
3 December 1984

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLIES, POWER, ELECTRICAL, FOR PORTABLE PANELBOARDS: TYPE I, CLASS 1, 350 AMPERE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-29184.

REQUIREMENTS:

Physical: Design and construction - see figure 1 and table I.
Overall length - see table II.

Electrical: Power - 208Y/120 volt, 3-phase, 4-pole, 5-wire.
Ampacity - 350 amperes.

PIN: M29184/1-(applicable dash number from table II).

AMSC N/A

FSC 6150

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:01Z
Check the source to verify that this is the current version before use.

TABLE I. Cable assembly components.

Item	Quantity	Description
1	4	Portable power cable, round construction, NEMA type W, single conductor, 250 million circular mils, with not less than 427 strands per conductor, with 1 inch of insulation removed at each end, and the exposed conductors dipped in solder.
2	1	Portable power cable, round construction, NEMA type W, single conductor, 1/0 AWG with not less than 259 strands per conductor, with 1 inch of insulation removed at each end, and the exposed conductors dipped in solder in accordance with MIL-STD-454.
3	1	Marking band, phase A, black.
4	1	Marking band, phase B, red.
5	1	Marking band, phase C, orange or blue.
6	1	Marking band, neutral, white.
7	1	Marking band, ground, green, if insulated.

TABLE II. Dash numbers.

Dash Number	Description
01	Cable assembly, 50 feet overall length.*
02	Cable assembly, 100 feet overall length.*

*Ground cable shall be a minimum 4 feet longer than cable assembly length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:01Z
Check the source to verify that this is the current version before use.

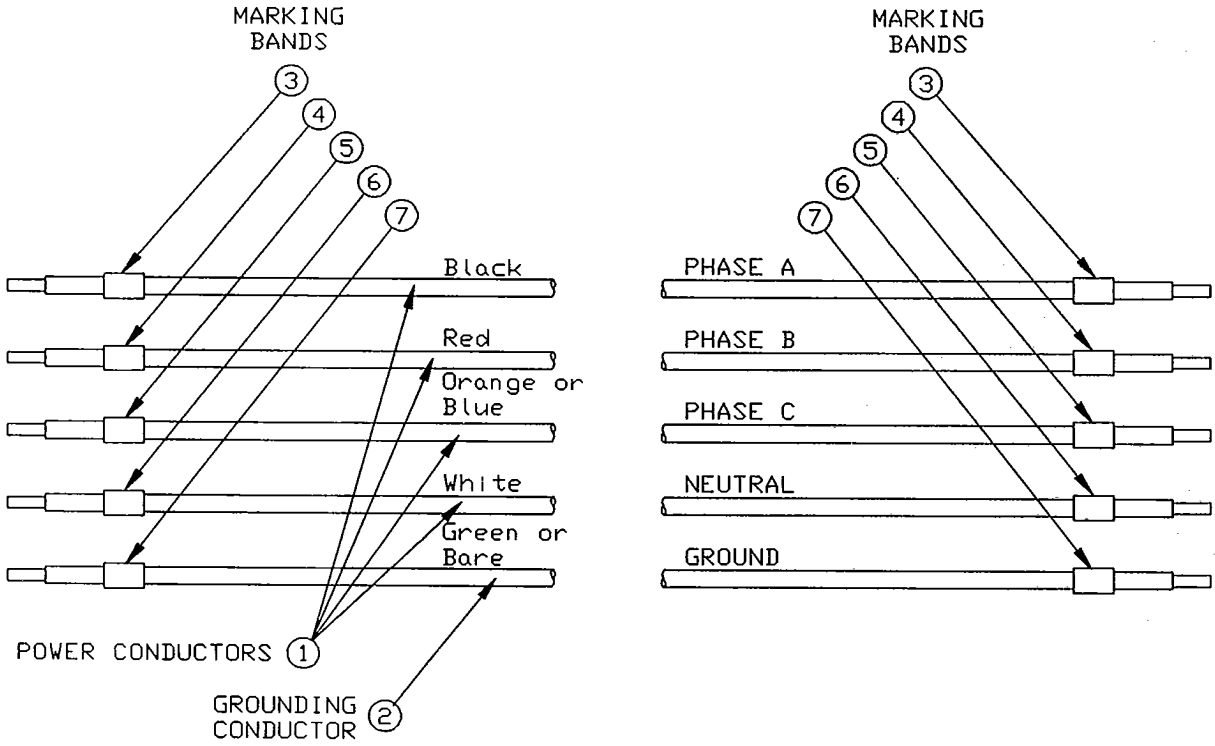


FIGURE 1. Cable assembly functional components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:01Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ME
Navy - YD
Air Force - 99

Review Activities:
Navy - MC, MS
Air Force - 80
DLA - GS

Preparing Activity:
Navy - YD

(Project 6150-0206)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:01Z
Check the source to verify that this is the current version before use.