
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, STRAIGHT, CATEGORY 4C (FOR MIL-C-5015 CONNECTORS AND MIL-C-5015 CONNECTOR ACCESSORIES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

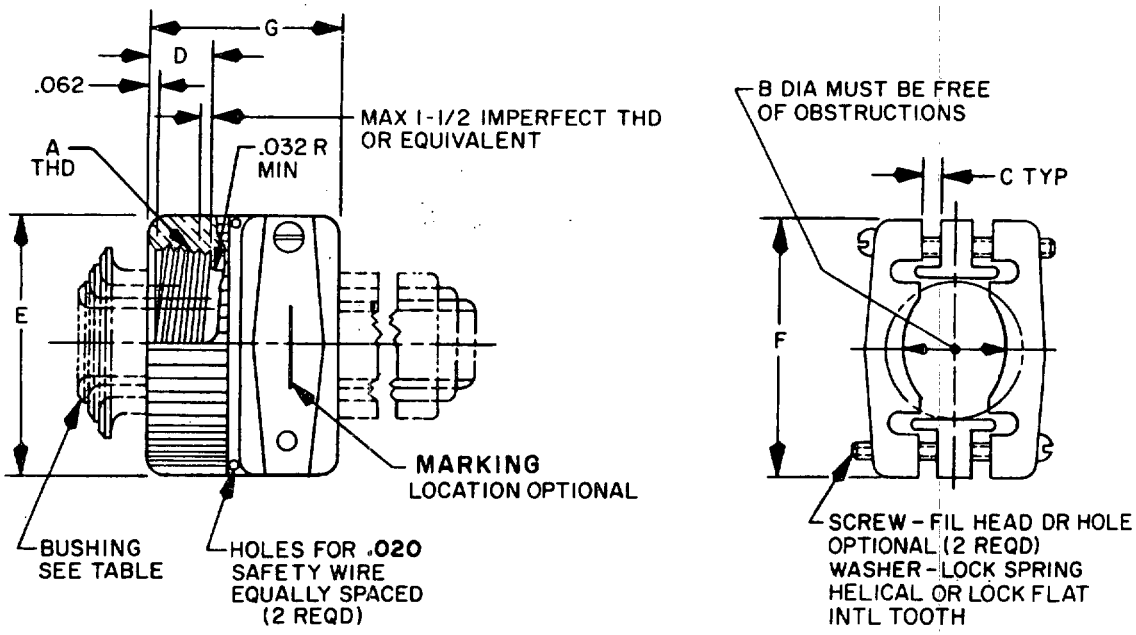

TYPE A

FIGURE 1. Configurations and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

DASH NO.	CONNECTOR SHELL SIZE (REF) SEE NOTE 8	A THREAD	B MAX	C	D	E ±.031 DIA	F ±.031	G ±.031	BUSHING (REF) SEE NOTE 9
-3A	8S AND 10S	.500-28 UNEF-2B	.250	.047	.406	.688	.812	.812	MS3420-3
-4A	10SL. 12S AND 12	.625-24 UNEF-2B	.312	.062		.812	.875		MS3420-4
-6A	14S AND 14	.750-20 UNEF-2B	.438	.078		.969	1.062	.875	MS3420-6
-8A	16S AND 16	.875-20 UNEF-2B	.562	.109		1.094	1.156	.938	MS3420-8
-10A	18	1.000-20 UNEF-2B	.625	.125		1.188	1.250		MS3420-10
-12A	20 AND 22	1.188-18 UNEF-2B	.750	.156		1.375	1.469		MS3420-12
-16A	24 AND 28	1.438-18 UNEF-2B	.938	.188		1.656	1.688	1.031	MS3420-16
-20A	32	1.750-18 UNS-2B	1.250	.250	.469	2.031	2.031	1.094	MS3420-20
-24A	36	2.000-18 UNS-2B	1.375	.297	.531	2.219	2.281	1.156	MS3420-24
-28A	40	2.250-16 UN-2B	1.625	.328		2.500	2.688	1.688	MS3420-28
-32A	44	2.500-16 UN-2B	1.875	.375	.594	2.781	2.938	1.750	MS3420-32
-40A	48	3.000-16 UN-2B	2.375	.453	.656	3.281	3.500		MS3420-40

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.031	.79	.969	24.61	1.375	34.92	2.219	56.36
.688	17.48	1.031	26.19	1.656	42.06	2.500	63.50
.812	20.62	1.094	27.79	1.688	42.88	2.781	70.64
.875	22.22	1.156	29.36	1.750	44.45	3.281	83.34
.938	23.83	1.188	30.18	2.031	51.59		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances: Decimals ±.016 (.41 mm), angles ±2°.
4. Dimensions apply after plating.
5. Dimensions and tolerancing in accordance with ANSI Y14.5-1973.
6. Remove all burrs and sharp edges.
7. Part numbers M85049/41-3A through -40A are interchangeable with part numbers AN3057-3A through -40A.
8. Clamp mates with connector shell size listed in this column.
9. Bushings for reference only and not supplied as part of clamp. For additional closedown of the B dimension, bushing MS3420-3 through MS3420-40 may be used.
   One bushing as required for M85049/41-3A through M85049/41-12A, corresponding to MS3420-3 through MS3420-12.
   Two bushings as required for M85049/41-16A through M85049/41-24A, one each corresponding to MS3420-16 through MS3420-24, and MS3420-12 through MS3420-20. (Examples: M85049/41-16A requires one MS3420-16 and one MS3420-12).
   Three bushings as required for M85049/41-28A through M85049/41-40A, one each corresponding to MS3420-28 through MS3420-40, and MS3420-24 through MS3420-32, and MS3420-20 through MS3420-28. (Examples: M85049/41-40A requires one MS3420-40, one MS3420-32, and one MS3420-28).

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.

Material: Aluminum alloy in accordance with MIL-C-85049.

Finish: W


Part number: see example below:

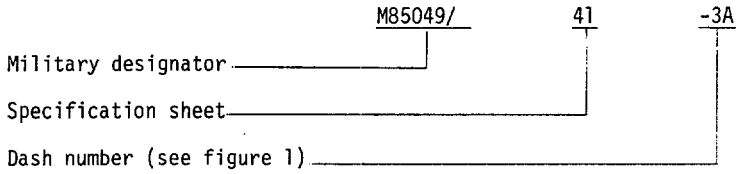

Qualification:
See MIL-C-85049, category 4C, examination of product, salt spray and post examination, only tests required.

QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane, IN 47522.

Supersession data:



Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11
DLA - ES

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3067-27)

U.S. GOVERNMENT PRINTING OFFICE: 1980 — 603-121/798

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-85049/41

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

POSTAGE AND FEES PAID
Navy Department
DOD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department (Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.