
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, STRAIGHT, SELF-LOCKING, SHIELD BAND TERMINATION, (RFI/EMI), SHRINK BOOT ACCOMMODATION, CATEGORY 38 (FOR MIL-C-38999 SERIES I AND II CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation
MIL-C-85049

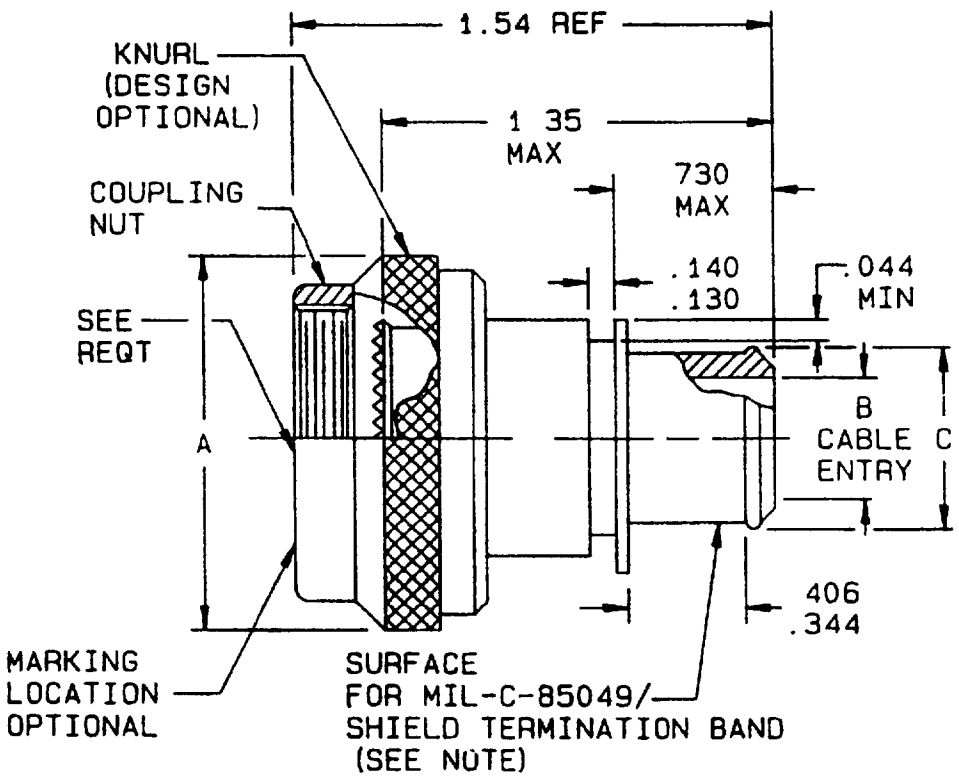


NOTE: Ribbed, internal knurl or surface roughness R_a 125-250 in accordance with ANSI B46 1 See figure 2 for selective plating details

FIGURE 1. Configuration and dimensions

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

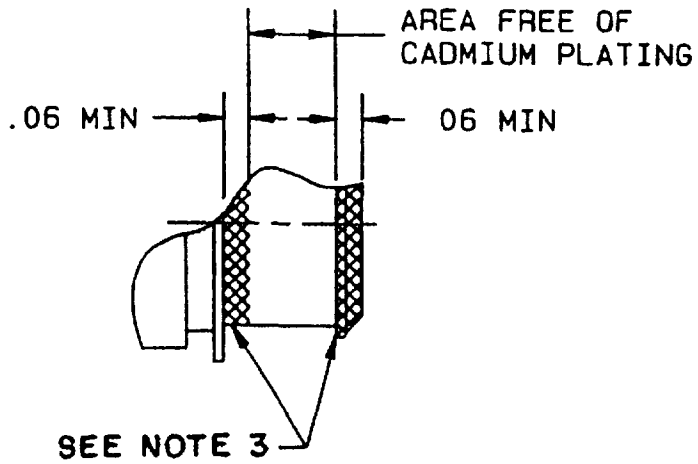

Inches	mm	Inches	mm	Inches	mm	Inches	mm
044	1.12	562	14 27	.829	21.06	1 157	29 39
130	3 30	583	14 81	.858	21 79	1 279	32 49
140	3 56	625	15 88	895	22.73	1 350	34 29
250	6.35	684	17 37	938	23.83	1 406	35 71
312	7 92	707	17 96	957	24.31	1 516	38 51
395	10.03	730	18 54	.984	24 99	1 642	41 71
438	11.13	750	19.05	1 000	25 40	1 768	44 91
457	11 61	770	19 56	1 083	27.51	1 889	47.98
500	12 70	812	20 62	1 145	29 08		

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 00 (25 4 mm)
3. Cadmium/nickel interface shall be coated with polysulfide sealant

FIGURE 2 Selective plating

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

TABLE I. Shell size and dimensions.

Accessory shell size	Connector shell size		A max dia	B dia ±.010 entry size		C dia ref	
	Series I	Series II		01	02	01	02
08	8	9	.859	N/A	.250	N/A	.395
10	10	11	986	N/A	.312	N/A	.457
12	12	13	1 156	312	.438	457	.583
14	14	15	1.281	.438	562	.583	707
16	16	17	1.406	.500	.625	645	770
18	18	19	1.516	625	.750	.770	.895
20	20	21	1.641	625	.812	.770	957
22	22	23	1 766	688	938	829	1 083
24	24	25	1 891	750	1.000	895	1 145

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction

Dimensions and configuration See figure 1 and table I

Interface dimensions: Shall conform to MIL-C-85049.

Coupling nut. Shall be captivated to the adapter body and free to rotate

Material and finish: In accordance with MIL-C-85049 and table II herein

TABLE II Material and finish.

Finish	Material
N - Electroless nickel 1/ P - Cadmium olive drab over electroless nickel (selective plating, see figure 2) W - Cadmium oliver drab	Aluminum alloy

1/ Not for Navy use Limited to space applications for Air Force use

Vibration Backshells shall be subjected to test parameters of applicable connector specifications The coupling torque shall be within +20, -10 inch-pounds of the initial value

Part or Identifying Number (PIN): See example below:

M85049/ 85 - 16 P 02

Military designator

Specification sheet

Shell size, see table I

Finish

Entry size

QUALIFICATION

Qualification See MIL-C-85049, category 3B

QPL evaluating activity Naval Air Warfare Center, Code B/444, 6000 East 21st Street, Indianapolis, IN 46219-2189

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 19, 99
DLA - ES

Preparing activity.
Air Force - 85

Agent.
DLA - ES

(Project 5935-3760-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE AIR FORCE
2750 LOG/ES
STANDARDIZATION
CUSTOMER SATISFACTION INQUIRY

TELEPHONE - COM 513-296-5517 DSN 986-5517
FAX - COM 513-296-8783 DSN 986-8783

VERY DISSATISFIED	DISSATISFIED	SOMEWHAT DISSATISFIED	SOMEWHAT SATISFIED	SATISFIED	VERY SATISFIED	NOT APPLICABLE
1	2	3	4	5	6	7

(PLEASE ENTER THE VALUE THAT YOU FEEL IS APPROPRIATE)

I. STAFF

1. PROVIDERS QUALIFICATIONS/COMPETENCE---------- ☐

2. PROVIDERS PROFESSIONALISM---------- ☐

	TIMELINESS	QUALITY
3. PROVIDERS RESPONSE TO YOUR INITIAL REQUEST----------	☐	☐

II. PRODUCT

	TIMELINESS	QUALITY
1. INITIAL DRAFT----------	☐	☐
2. REVISION/AMENDMENT SATISFIED YOUR REQUIREMENT----------	☐	☐

III. COMMENTS/SUGGESTIONS

(CONSTRUCTIVE COMMENTS OR SUGGESTIONS APPRECIATED)

MIL-C-85049/85

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

"Please Fold and Tape"

First
Class

Official Business

DEPARTMENT OF THE AIR FORCE
2750 LOG/ES
GENTILE STATION
1060 HAMILTON ST.
DAYTON, OHIO 45444-5400

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.