FED. SUP CLASS
5306

Review activities:
ARMY - MC
NAVY - SA
DSA - IS

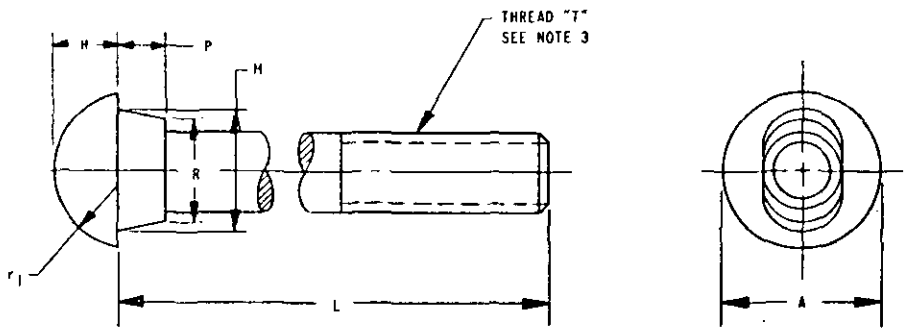

TABLE I. PART NUMBERS

MS35474 DASH NO.	A ± 1/16	THREAD T	H ± 1/16	L ± 1/8	M ± 1/32	P	R ± 1/32	r_1	USE WITH
-4	1-9/32	.75-10 UNC-2A	15/32	4	1-1/16	7/16	1-1/32	7/16	60 LB RAIL
-2	1-11/16	1-8 UNC-2A	5/8	5-1/4	1-3/8	9/16	1-11/32	19/32	90 LB RAIL
-3	1-11/16	1-8 UNC-2A	5/8	5-3/4	1-3/8	9/16	1-11/32	19/32	115 LB RAIL

NOTES:

1. MATERIAL AND OTHER CRITERIA SHALL BE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION MIL-B-3964.
2. BOLT SHALL BE NEATLY FORMED AND FREE FROM FINS, NICKS, AND INJURIOUS DEFECTS, AND HAVE A WORKMANLIKE FINISH.
3. SCREW THREADS SHALL BE IN ACCORDANCE WITH THE [illegible]

© CANCELED – FOR FUTURE ACQUISITION USE
ANSI B18.10

DOCUMENTS REFERENCED HEREIN.

7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

(B) ENTIRE STANDARD REVISED

Project No. 5306-0576

P.A. NAVY - YD Other Cust ARMY-ME AF -99	TITLE BOLT, ~~DUAL~~ NECK, TRACK OVAL	MILITARY STANDARD MS35474
PROCUREMENT SPECIFICATION MIL-B-3964	SUPERSEDES.	SHEET 1 OF 1

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 5 MARCH 1956 REVISED (B) 20 JULY 1978 © 20 April 1984

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.