Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on information in the current DODISS(PSC Listing).
ARMY: GL+ MC+ EL+ NAVY: MC0 SH+ SA+ YD0 AIR FORCE: 260 69+ 85+

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5306

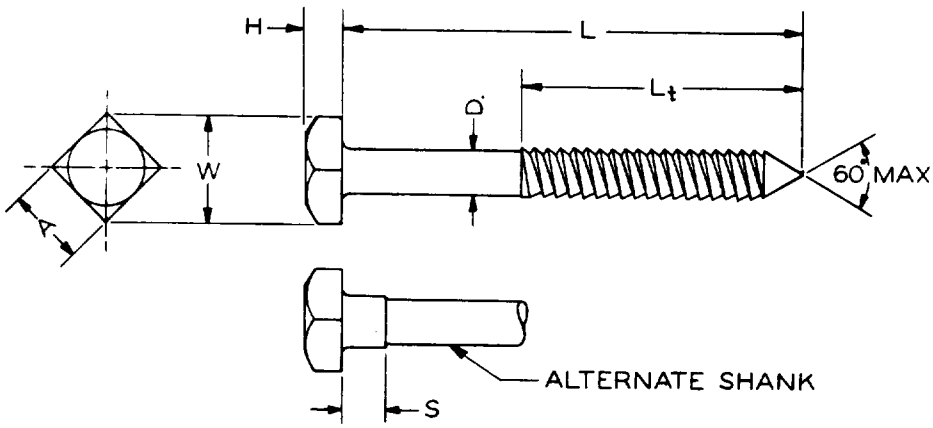

DASH NO.	DIMENSION						
	D	L	L_t	W	A	H	S
-1	3/8-8	3 1/2	2 1/4 MIN	.747	9/16	1/4	3/16
-2	1/2-6	4 1/2	2 3/4 MIN	.995	3/4	21/64	7/16

NOTES:

1. REFERENCE DOCUMENTS - ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BID APPLY.
2. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
3. (A) MATERIAL AND FINISH SHALL BE IN ACCORDANCE WITH EDISON ELECTRIC INSTITUTE SPECIFICATION TD-3.

ALL DIMENSIONS IN INCHES

APPROVED 19 NOV 57 REVISED (A) 10 August 1967

P.A. EL Other Cust YD 69	TITLE BOLT, LAG, FETTER DRIVE HOT GALVANIZED (POLE-LINE)	MILITARY STANDARD MS 35801
PROCUREMENT SPECIFICATION MIL-H-55053	SUPERSEDES:	

*U.S. GOVERNMENT PRINTING OFFICE: 1967-801-612/1714

5306-0123

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:28Z
Check the source to verify that this is the current version before use.