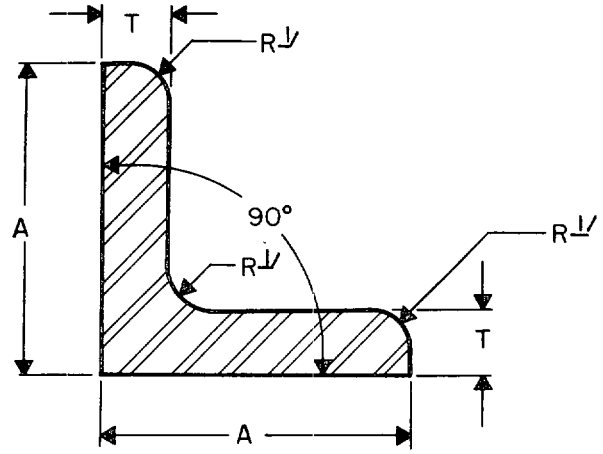


1/ SEE NOTE 2

TABLE 1. DASH NUMBERS.

DASH NO	INDUSTRY DESIGNATOR	A	T	HEAT TREATMENT	FORMING PROCESS 1/
001	L3/4 x 3/4 x 1/8	3/4	1/8	ANNEALED	E,H,C
003	L1 x 1 x 1/8	1	1/8	ANNEALED	E,H,C
005	L1-1/2 x 1-1/2 x 1/8	1-1/2	1/8	ANNEALED	E,H,C
007	L1-1/4 x 1-1/4 x 3/16	1-1/4	3/16	ANNEALED	E,H,C
009	L1-1/2 x 1-1/2 x 3/16	1-1/2	3/16	ANNEALED	E,H,C
011	L2 x 2 x 3/16	2	3/16	ANNEALED	E,H,C
013	L2 x 2 x 1/4	2	1/4	ANNEALED	E,H,C
015	L2-1/2 x 2-1/2 x 1/4	2-1/2	1/4	ANNEALED	E,H,C

1/ SEE REQUIREMENT 3

REQUIREMENTS:

1. MATERIAL. STEEL, CORROSION RESISTANT, TYPE 304 (UNS S30400) AS SPECIFIED IN PROCUREMENT DOCUMENT.
2. LENGTH. STANDARD LENGTH OF STRUCTURAL ANGLE IS 10 FEET MINIMUM, 12 FEET MAXIMUM.
3. FORMING PROCESS. EXTRUDED - CODE "E"
   HOT FINISHED - CODE "H"
   COLD FINISHED - CODE "C"
4. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

   EXAMPLE: MS14470H001
   - (SEE TABLE I)
   - HOT FINISHED (SEE REQUIREMENT 3)
   - BASIC MS NUMBER
5. MARKING. IRON AND STEEL PRODUCTS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-183 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. R = RADII OF FILLETS AND TOES OF SHAPE PROFILES VARY WITH INDIVIDUAL MANUFACTURERS AND THEREFORE ARE NOT SPECIFIED.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
4. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 28 FEB 1985 REVISED

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
AS		ANGLE,STRUCTURAL, CORROSION RESISTANT, TYPE 304	MS14470
Other Cust MR 99			
PROCUREMENT SPECIFICATION: QQ-S-763	SUPERSEDES:		PAGE 1 OF 1

USER ACTIVITIES:
REVIEWER ACTIVITIES:
AIR FORCE - 84
DLA - IS
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:44Z
Check the source to verify that this is the current version before use.