MIL-B-36581
19 August 1969

MILITARY SPECIFICATION

BOTTLE, SNAP-ON CAP, PLASTIC, TABLET AND CAPSULE, ROUND

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

1.1 Scope. This specification covers plastic, snap-on cap bottles, suitable for dispensing drugs in tablet or capsule form in Military pharmacies.

1.2 Classification. Bottles shall be furnished in the following sizes:

| | |
|---|---|
| Size 5 | 5 dram (19 cc) |
| Size 7 | 7 dram (26 cc) |
| Size 10 | 10 dram (37 cc) |
| Size 13 | 13 dram (48 cc) |
| Size 20 | 20 dram (75 cc) |
| Size 30 | 30 dram (110 cc) |
| Size 40 | 40 dram (150 cc) |

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS.

Federal

| | |
|---|---|
| PPP-B-566 | Boxes, Folding, Paperboard |
| PPP-B-585 | Boxes, Wood, Wirebound |
| PPP-B-601 | Boxes, Wood, Cleated-Plywood |
| PPP-B-621 | Boxes, Wood, Nailed and Lock-Corner |
| PPP-B-636 | Boxes, Fiberboard |
| PPP-B-676 | Boxes, Setup |

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

Military

MIL-L-10547 Liners, Case, and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible.

STANDARDS

Military

MIL-STD-105 Sampling Procedures and Tables For Inspection by Attributes.

MIL-STD-129 Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as direct by the contracting officer.)

3. REQUIREMENTS

3.1 Material.

3.1.1 Bottle. Bottle shall be fabricated of clear, colorless, polystyrene rigid plastic.

3.1.2 Cap. Cap shall be fabricated of white or natural-color polyethylene.


3.2 Construction. Bottle shall be a straight-wall cylindrical container with a snap-on cap, as shown in figure 1. Side walls of container may be slightly tapered. The bottle shall be stable when placed on a smooth plane surface, and shall be clean, dry and ready for use. Bottle shall be furnished with the cap in place.

3.2.1 Bottle. Bottle shall be cylindrical in shape and shall be provided with a bead on the outer rim of the cylinder opening. The bead shall be of such dimension that it shall accept and securely retain a snap-on cap (see 3.2.2). Dimensions of the bottle shall be as shown in the table on figure 1.

3.2.2 Cap. Cap shall have a tab integrally molded to its outside rim. The cap and the bottle shall be so designed that when the two are engaged, the bead of the cap shall be below the bead of the bottle, and shall hug the surface (smallest diameter) of the bottle at that point (See figure 1). Cap shall be of such design, thickness, and flexibility as to snap on and off over the beaded rim of the bottle and provide a secure and firm closure. Cap shall be 1/4 $\pm$ 1/16 inch in overall height.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

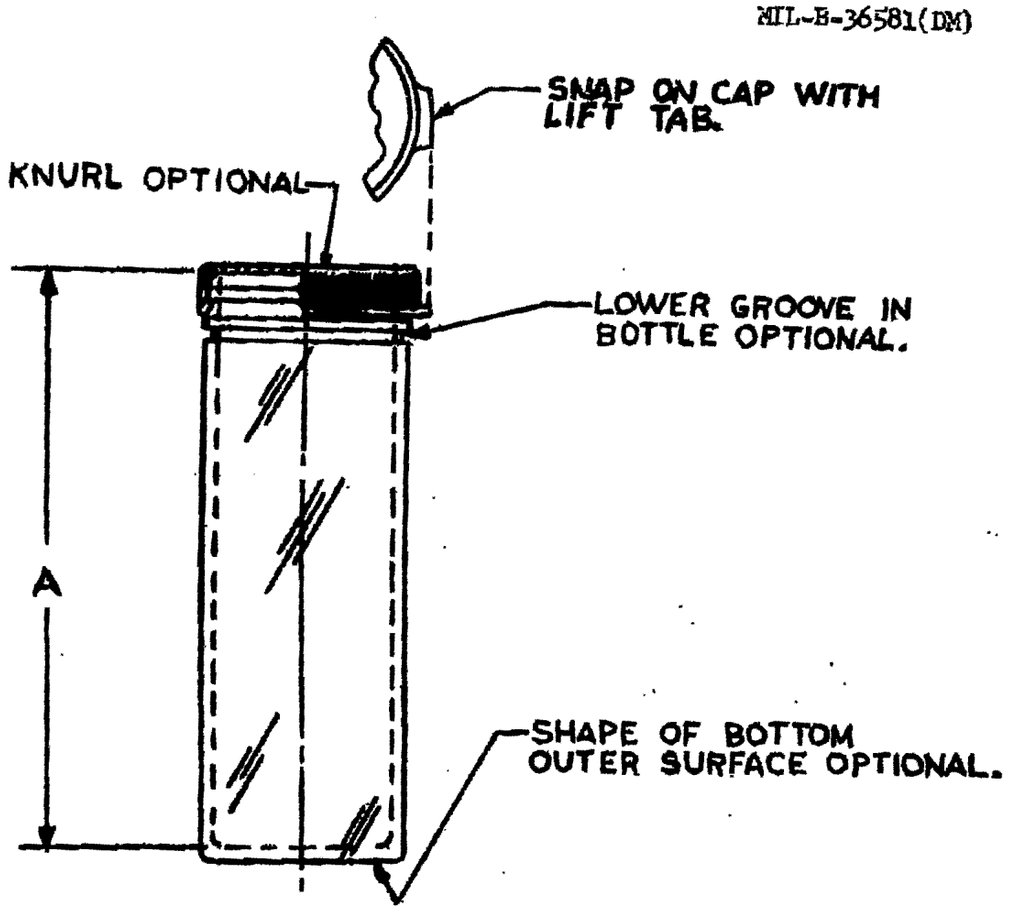


| SIZE | | A | WALL |
|---|---|---|---|
| DRAM CAPACITY | TOL. | INSIDE HEIGHT OF BOTTLE | THICKNESS (MIN) |
| 5 | +1 −0 | 1 3/4 - 2 1/4 | 0.038 |
| 7 | | 1 15/16 - 2 1/8 | 0.038 |
| 10 | +1 −0.5 | 2 3/32 - 3 1/16 | 0.038 |
| 13 | | 2 1/8 - 4 1/16 | 0.038 |
| 20 | ±2 | 2 1/4 - 2 7/8 | 0.048 |
| 30 | | 2 11/16 - 3 1/8 | 0.048 |
| 40 | | 3 - 3 3/4 | 0.048 |

FIGURE 1
BOTTLE SNAP-ON CAP PLASTIC



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

3.3 Identification marking. Each bottle shall be permanently and legibly marked with the name or registered trademark of the manufacturer and the capacity on the outside bottom of the bottle. The bottle shall be marked with its capacity to the nearest dram unit.

3.4 Workmanship. Workmanship shall be first class throughout. Bottles shall be free from scratches, bubbles, chipped edges and other defects which detract from their appearance or may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties.)

4.2 Sampling. Unit of product for inspection purposes shall be one bottle with cap.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and Table I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

Table I. Sampling for Examination

| | Inspection level | AQL (percent defective) |
|---|---|---|
| For visual examination | | |
| Major A defects | II | 2.5 |
| Major B defects | S-3 | 2.5 |
| Minor defects | II | 4.0 |
| For dimensional examination | S-1 | 2.5 |

4.3 Examination. The bottles and caps shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with Table II.

Table II. Classification of Defects

| Categories | Defects* |
|---|---|
| **Major A** | |
| 101 | Bottle and cap not free of cracks, chips, and breaks. |
| 102 | Bottle and cap not free of deformation. |
| 103 | Bottle and cap not free of sharp edges. |
| 104 | Bottle not free of crazing. |
| 105 | Bottle not clean, dry, and ready for use.** |
| 106 | Bottle not furnished with cap in place. |
| 107 | Bottle not stable on smooth plane surface. |
| 108 | Closure not secure and firm on bottle. |
| 109 | Identification marking missing, illegible, or incomplete. |
| 110 | Bottle not clear and colorless. |
| **Major B *** | |
| 150 | Bead of the cap not below the bead of the bottle. |
| 151 | Bead of the cap does not hug the surface of the bottle. |
| NOTE: | Cap shall be cut in half and one section fitted onto rim of bottle to verify Classification of Defects under Major B. |
| **Minor** | |
| 201 | Finish of bottle not smooth. |
| 202 | Bottle and cap not free of feathered edges. |
| 203 | Bottle not free of burs. |
| 204 | Bottle not free of mar-marks and blemishes. |
| 205 | Bottle not free of scratches and pits. |
| 206 | Bottle not free of sharp mold marks. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

*Examination shall not be restricted to the classified possible defects listed above.
**Application of the cap to the bottle, during the capping process, may result in deposit of some small plastic shavings in the bottle. Presence of a few of these shavings shall not be considered a defect.

4.3.2 Dimensional examination. The bottles and caps shall be examined for defects in dimensions. Any dimension not within the tolerance specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One package (72 bottles or 144 bottles) of the size specified, sontitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in table III shall be packaged in each unit, intermediate and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table III. Packaging Quantities

| Size | Unit package | Intermediate package | Exterior container |
|---|---|---|---|
| 20, 30, 40 | 1 unit | Not required | 12 units |
| 5, 7, 10, 13 | 1 unit | Not required | 18 units |

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package. Each unit shall be packaged in a box of appropriate size and design constructed in accordance with PPP-B-566 or PPP-B-676, except commercial colors will be acceptable, or PPP-B-636, type CF, class domestic. Carton shall be designed with suitable interior fittings or shall contain sufficient cushioning material to insure against shifting of, or damage to the contents. Closure shall be adequate to prevent accidental opening.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for type 2 load, and constructed in accordance with PPP-B-585, style 3, for class 3 use; PPP-B-601, table III, using type I, class 1 plywood; PPP-B-621, table III; or PPP-B-636, type CF, class weather-resistant. Closure and strapping of wood boxes shall be in accordance with appendix of applicable box specification. Closure of fiberboard boxes shall be as specified in the appendix and waterproofing shall be in accordance with 30.4 of PPP-B-636.

5.2.1.2 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall conform to PPP-B-601, table II, using type III, class 1 plywood; or shall be designed for type 2 load and constructed in accordance with PPP-B-585, style 3, for class 2 use; PPP-B-621, table I; or PPP-B-636, type CF, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, constructed so as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Interior packages. Each unit package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

a. Number and date of this specification.
b. Selection of applicable levels of packaging and packing (See 5.1 and 5.2).

6.2 This specification does not cover all types, classes, grades or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the types which are normally procured to meet military requirements.

Custodians:
Army MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency (DM)

Review activities:
Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.





Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.