COMMERCIAL ITEM DESCRIPTION
INSTALLING TOOL SET, O-RING

The General Services Administration has authorized the use of this commercial item description.

This commercial item description covers a tool set designed to install TFE and elastomeric O-rings and seals over male tube fittings conforming to MS 3365 without damage to or distortion of the ring or seal.

Salient characteristics:

The set shall consist of 13 different sized installing tools, furnished in a substantially constructed case of metal, wood, or plastic with a compartment for each of the 13 installing tools. The case shall have a cover with a positive latch.

The installing tool shall be:

Similar to figure 1.

In dimensions listed in table I. The bored internal length shall be sufficient to completely cover the threads of the MS fitting

Fabricated from a high density polyurethane or similar material which will withstand repeated test drops. Random sample installing tools shall be subjected to six drops from a height of 3 feet onto a concrete floor without any nicks or other surface damage which may damage the O-ring.

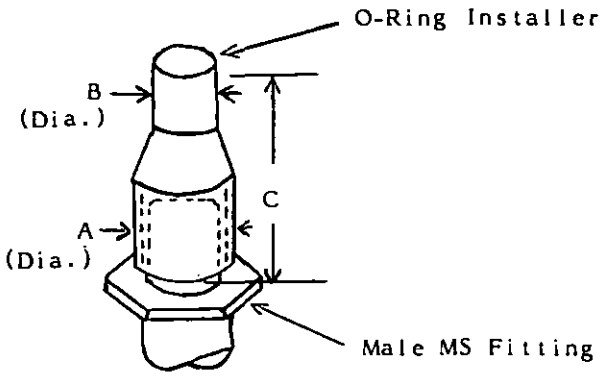


FIGURE 1. O-ring installer and fitting.

TABLE I. Installing tool sizes and dimensions

Size (inches)	A Maximum (inches)	B Maximum (inches)	C Nominal (inches)
1/8	0.415	0.225	1-7/16
3/16	0.490	0.315	1-1/2
1/4	0.565	0.359	1-5/8
5/16	0.630	0.421	1-5/8
3/8	0.690	0.476	1-11/16
1/2	0.880	0.654	1-13/16
5/8	0.985	0.767	2
3/4	1.190	0.938	2-3/16
1	1.465	1.188	2-1/4
1-1/4	1.765	1.500	2-5/16
1-1/2	2.015	1.750	2-7/16
1-3/4	2.375	2.090	2-5/8
2	2.615	2.340	2-3/4

Workmanship. The outer surface of the installing tool that makes contact with the O-ring shall be free of any imperfection that may scratch or cut the surface of the O-ring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.

Preservation, packaging, packing, and marking. The sets shall be preserved and packaged in accordance with normal commercial practice and packed in fiberboard boxes that will assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling, and storage. The shipping container shall be in compliance with National Motor Freight Classification and Uniform Freight Classification. Marking shall be as specified in the contract or order.

Note: NSN 5120-00-937-7428 has been assigned.

Military standards are available from Naval Forms and Publications Center (Code 300), 5801 Tabor Avenue, Philadelphia, PA 19120.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:08Z
Check the source to verify that this is the current version before use.