INCH-POUND


MIL-DTL-83420/3B
21 December 2000
SUPERSEDING
MIL-DTL-83420/3A
30 October 1999

* DETAIL SPECIFICATION SHEET

WIRE ROPE, FLEXIBLE, TYPE II (JACKETED), COMPOSITION A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

* The requirements for acquiring the wire rope described herein shall consist of this specification sheet and the latest issue of MIL-DTL-83420 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

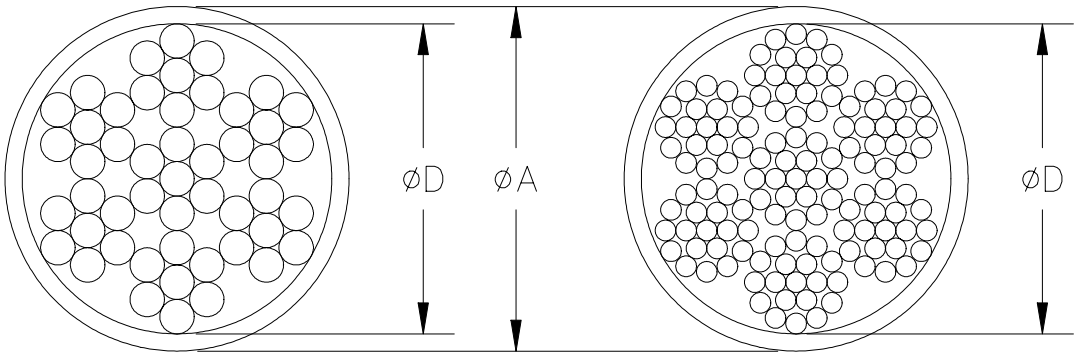

WIRE ROPE, 7 x 7 WIRE ROPE, 7 x 19

* NOTES:

1. Unless otherwise specified, all dimensions are in inches.
2. Qualified Products List (QPL) applies to the products listed herein.

FIGURE 1. Wire rope, flexible, type II, (jacketed) composition A.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Carbon steel (see procurement specification).

2. Part Number: The part number consists of the letter "M", the basic number of this specification sheet, and a dash number taken from table I.

EXAMPLE: M83420/3-004

- 004 — Dash number
- 3 — Specification sheet number

* M83420/3-004 Indicates - Wire Rope, Flexible, Type II, Carbon Steel, Construction; 7 x 19, Diameter 3/16, 1/4 Outside Diameter Jacket

* TABLE I. Dash numbers.

Dash Number	Diameter "D"	Diameter "A" Outside Diameter of Jacket	Type of Construction	Breaking Strength (lbs.)	Length Per Reel (ft.) 1/
001	3/64	1/16	7 x 7	270	1,000
002	3/32	1/8	7 x 7	920	1,000
003	1/8	3/16	7 x 19	2,000	1,000
004	3/16	1/4	7 x 19	4,200	1,000
005	1/32	3/64	3 x 7	110	1,000
006	3/64	5/64	7 x 7	270	1,000
007	1/16	3/32	7 x 7	480	1,000
008	1/16	1/8	7 x 7	480	1,000
009	1/16	3/32	7 x 19	480	1,000
010	1/16	1/8	7 x 19	480	1,000
011	3/32	5/32	7 x 7	920	1,000
012	3/32	1/8	7 x 19	1,000	1,000
013	3/32	5/32	7 x 19	1,000	1,000
014	5/32	7/32	7 x 19	2,800	1,000
015	5/32	9/32	7 x 19	2,800	1,000
016	3/16	5/16	7 x 19	4,200	1,000
017	7/32	9/32	7 x 19	5,600	1,000

1/ or as specified in the purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:04Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers - Continued.

Dash Number	Diameter "D"	Diameter "A" Outside Diameter of Jacket	Type of Construction	Breaking Strength (lbs.)	Length Per Reel (ft.) 1/
018	7/32	11/32	7 x 19	5,600	1,000
019	1/4	5/16	7 x 19	7,000	1,000
020	1/4	3/8	7 x 19	7,000	1,000
021	9/32	13/32	7 x 19	8,000	1,000
022	5/16	7/16	7 x 19	9,800	1,000
023	3/8	1/2	7 x 19	14,400	1,000

1/ or as specified in the purchase order.

* CHANGES FROM PREVIOUS ISSUE: The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Preparing activity:
DLA - GS5

(Project 4010-0112)

Reviewer:
Air Force - 82

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:04Z
Check the source to verify that this is the current version before use.