
FED. SUP CLASS

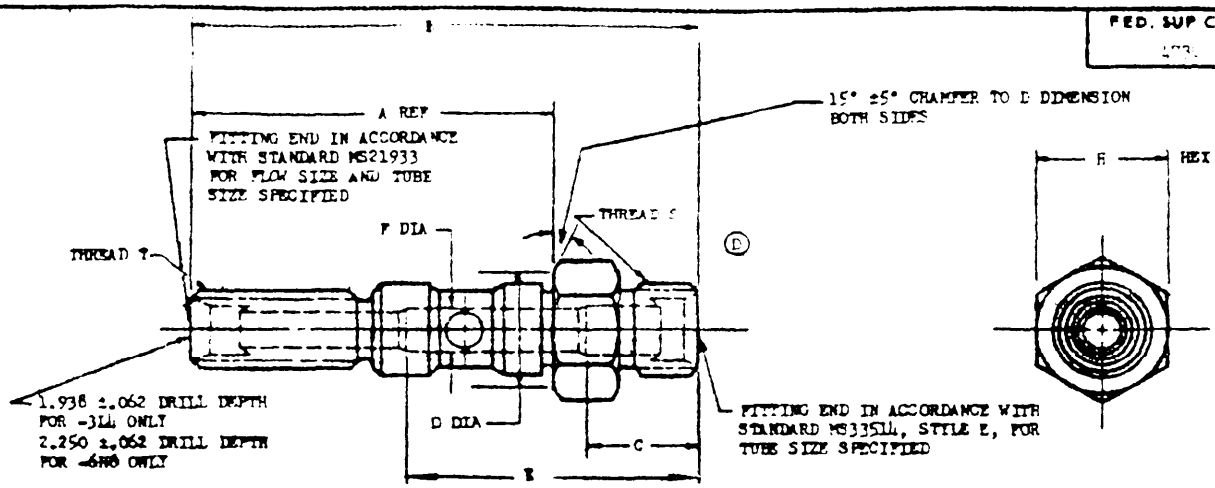

LOW FLOW SIZE DASH NUMBER	TUBE OD	THREAD S MIL-S-8879	TUBE OD	THREAD T MIL-S-8879	A REF	B	C ±.062	D +.000 -.025	E ±.062	F ±.003	H HEX	WT LB MAX
-3L4	3/16	.3750-24 UNJF-3A	1/4	.4375-20 UNJF-3A	2.072	2.806	THRU	.621	—	.187	.621/.628	—
-4L4	1/4	.4375-20 UNJF-3A	1/4	.4375-20 UNJF-3A	2.072	2.869	THRU	.684	1.715	.187	.684/.691	.014
-5L4	5/16	.5000-20 UNJF-3A	1/4	.4375-20 UNJF-3A	2.072	2.931	—	.746	1.750	.234	.746/.753	.017
-6L4	3/8	.5625-18 UNJF-3A	1/4	.4375-20 UNJF-3A	2.072	2.978	.663	.871	1.750	.234	.871/.878	.022
-8L4	1/2	.7500-16 UNJF-3A	1/4	.4375-20 UNJF-3A	2.072	3.071	.656	.996	1.844	.234	.996/1.003	—

HIGH FLOW SIZE DASH NUMBER	TUBE OD	THREAD S MIL-S-8879	TUBE OD	THREAD T MIL-S-8879	A REF	B	C ±.062	D +.000 -.025	E ±.062	F ±.003	H HEX	WT LB MAX
-6H4	3/8	.5625-18 UNJF-3A	1/4	.4375-20 UNJF-3A	2.353	3.259	—	.871	1.913	.297	.871/.878	.035
-6H5	3/8	.5625-18 UNJF-3A	5/16	.5000-20 UNJF-3A	2.353	3.259	—	.871	1.913	.297	.871/.878	—
-6H6	3/8	.5625-18 UNJF-3A	3/8	.5625-18 UNJF-3A	2.359	3.265	THRU	.871	THRU	.297	.871/.878	.036
-6H8	3/8	.5625-18 UNJF-3A	1/2	.7500-16 UNJF-3A	2.460	3.366	THRU	.871	—	.422	.871/.878	.037
-8H4	1/2	.7500-16 UNJF-3A	1/4	.4375-20 UNJF-3A	2.353	3.352	—	.996	2.030	.422	.996/1.003	—
-8H5	1/2	.7500-16 UNJF-3A	5/16	.5000-20 UNJF-3A	2.353	3.352	—	.996	2.030	.422	.996/1.003	—
-8H6	1/2	.7500-16 UNJF-3A	3/8	.5625-18 UNJF-3A	2.359	3.358	—	.996	2.030	.422	.996/1.003	.037
-8H8	1/2	.7500-16 UNJF-3A	1/2	.7500-16 UNJF-3A	2.460	3.459	THRU	.996	THRU	.422	.996/1.003	—
-10H4	5/8	.8750-14 UNJF-3A	1/4	.4375-20 UNJF-3A	2.353	3.415	.812	1.121	2.055	.422	1.121/1.128	—
-10H5	5/8	.8750-14 UNJF-3A	5/16	.5000-20 UNJF-3A	2.353	3.415	.812	1.121	2.055	.422	1.121/1.128	—
-10H6	5/8	.8750-14 UNJF-3A	3/8	.5625-18 UNJF-3A	2.359	3.421	.812	1.121	2.055	.422	1.121/1.128	—
-10H8	5/8	.8750-14 UNJF-3A	1/2	.7500-16 UNJF-3A	2.460	3.522	.812	1.121	THRU	.422	1.121/1.128	.046

(D) INACTIVE FOR NEW DESIGN AFTER 31 DEC: 1989

(D) DENOTES CHANGE

USER ACTIVITIES: ARMY - CL, CR, MF, AT

REVIEW ACTIVITIES: Navy - AR, MI DLA - CS

VT A Approved for public release; distribution is unlimited.

DISTRIBUTION S

Other Cust
USAF - 99
ARMY - AV

INTERNATIONAL INTEREST
SEE NOTE (D)

TITLE
BOLT, CLUSTER FITTING, SINGLE PORT, THROUGH, FLARELESS

MILITARY STANDARD
MS21939

PROCUREMENT SPECIFICATION
MIL-F-18327

SUPERSEDES:
MS21939(AS)

SHEET 1 OF

DD FORM 672-1 (Coordinated)

APPROVED 15 FEB 1956 REVISED (A) 20 NOV 57 (B) 27 June 69 (C) 26 JUNE 1981 (D) 21 JUNE 1988

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:42Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5330

REQUIREMENTS: (S)

1. MATERIAL. ALUMINUM ALLOY - BARS. SEE PROCUREMENT SPECIFICATION.

2. FINISH: SEE PROCUREMENT SPECIFICATION.
SURFACE FINISH IN ACCORDANCE WITH ANSI B46.1
UNLESS OTHERWISE SPECIFIED, ALL OUTSIDE MACHINED SURFACES SHALL BE 125 MICROINCHES Ra AND ALL INSIDE SURFACES SHALL BE 250 MICROINCHES Ra.

NOTES: (D)

1. FITTINGS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS.

2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS±.010, ANGLES±1/2°.

3. PART NUMBERS.
NO CODE LETTER IN PART NUMBER FOR ALUMINUM ALLOY (2024).
ADD W IN PLACE OF DASH FOR ALUMINUM ALLOY (7075).
EXAMPLES OF PART NUMBERS:
MS21939-8L4 - BOLT, 1/2 TO 1/4 TUBING, LOW FLOW, ALUMINUM ALLOY (2024).
MS21939W8L4 - BOLT, 1/2 TO 1/4 TUBING, LOW FLOW, ALUMINUM ALLOY (7075).

4. INSTALLATION IN ACCORDANCE WITH MS21931.

5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

6. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

REVIEW ACTIVITIES: USAF - 82
ARMY - AR, MI
DLA - CS

USER ACTIVITIES: ARMY - CL, CR, ME, AT

DISTRIBUTION STATEMENT A Approved for public release;distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications for repetitive use shall be made
from this document when applicable.

APPROVED 15 Feb 1956 REVISED (D) FOR CHANGES SEE SHEETS 1 AND 2.

P.A. NAVY — AS Other Cust USAF - 99 ARMY - AV	INTERNATIONAL INTEREST ~~SEE NOTE 3~~ (5)	TITLE BOLT, CLUSTER FITTING, SINGLE PORT, THROUGH, FLARELESS	MILITARY STANDARD MS21939
PROCUREMENT SPECIFICATION MIL-F-18280	SUPERSEDES MS21939(ASG)	SHEET 2 OF 2	

DD FORM 1 MAR 72 672-1 (Superseding previous editions of this form are obsolete.) PLATE NO. 20000

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:42Z
Check the source to verify that this is the current version before use.