INCH-POUND
MS25081M
28 May 2026
SUPERSEDING
MS25081L
15 August 2011

DETAIL SPECIFICATION SHEET

WASHER, KEY

Reactivated after 2 February 2004 and may be used for new and existing designs and acquisitions.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

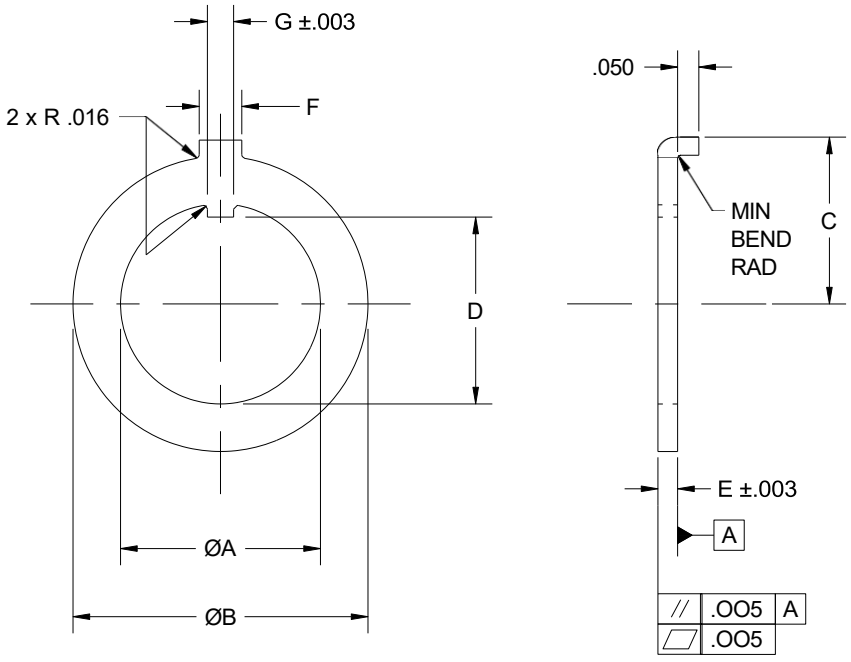


FIGURE 1. Washer, Key.

Beneficial comments, recommendations, additions, deletions, clarifications, and any other data that may improve this document should be sent to: DLA Aviation VEB, 6090 Strathmore Road, Richmond, VA 23237 or emailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil

AMSC N/A FSC 5310

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:03Z
Check the source to verify that this is the current version before use.

Table I - Dash numbers and dimensions

DASH NO		∅A	∅B ±.015	C	D		E	F	G
STEEL	CRES				MAX	MIN			
-0	C0	.255	.398	.263	.223	.220	.030	.062	.046
-4	C4	.475	.719	.392	.440	.433	.040	.110	.062
-5	C5	.631	.875	.517	.597	.589			
-6	C6	.652		.470	.605	.591			
-7	C7	.752	.984	.528	.707	.693			
-8	C8	1.010	1.250	.705	.965	.951			

REQUIREMENTS:

1. Marking: The washer shall be marked in accordance with MIL-STD-130.

2. Material: Carbon steel in accordance with ASTM-A659/A659M, ASTM-A1011/A1011M, ASTM-A794/A794M, ASTM-A1008/A1008M or ASTM-A109/A109M. Corrosion resistant steel (CRES), 304 (UNS S30400) in accordance with SAE-AIR4127.

3. Finish: Carbon steel, cadmium plate in accordance with SAE-AMS-QQ-P-416, type II, class 3. CRES, passivate in accordance with SAE-AMS2700.

4. Tolerances: Unless otherwise specified, tolerances: .XXX ± .005.

5. Example of part number: MS25081-4 = Washer, cadmium plated carbon steel.
   MS25081C4 = Washer, corrosion resistant steel

NOTES:

1. Dimensions in inches.

2. Break sharp edges and remove all burrs.

3. Interpret drawing in accordance with ASME Y14.5.

4. In the event of a conflict between the text of this document and the references cited herein the text of this document takes precedence.

5. Unless otherwise specified, issues of referenced documents are those in effect at the time of solicitation.

6. Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:03Z
Check the source to verify that this is the current version before use.

Custodians:
Army – CR4
Navy – AS
Air Force – 99
DLA – GS

Preparing activity:
DLA – GS7

(Project 5310-2026-005)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:03Z
Check the source to verify that this is the current version before use.