

FED. SUP CLASS
6115

MS33631 SHALL BE USED AS A DESIGN GUIDE. LOAD TERMINALS IN AREA "A". ALL OTHER TERMINALS IN AREA "AA".

MOUNTING FLANGE & COUPLING IN ACCORDANCE WITH AND10266 SLOTTED MOUNTING HOLES

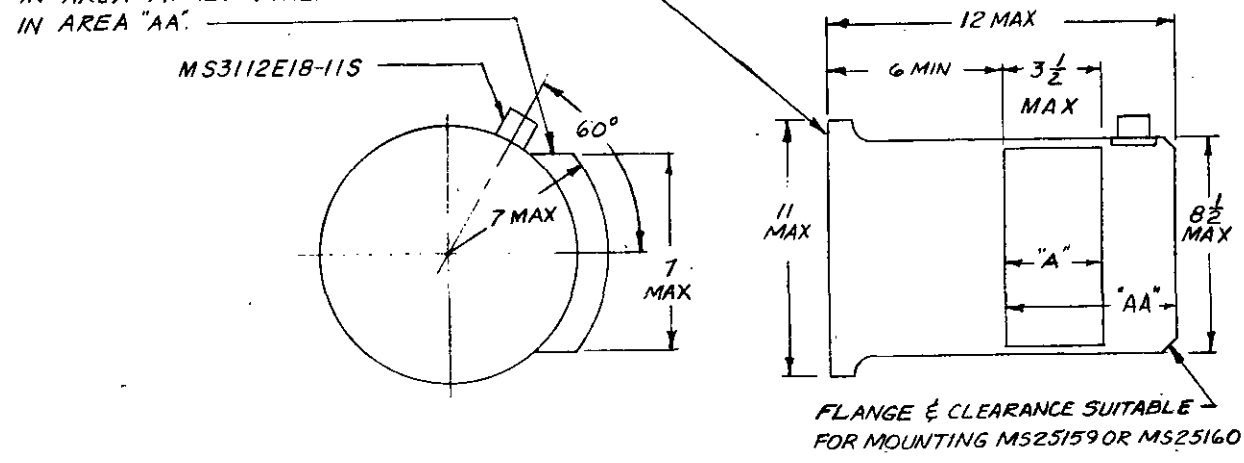

GENERATOR

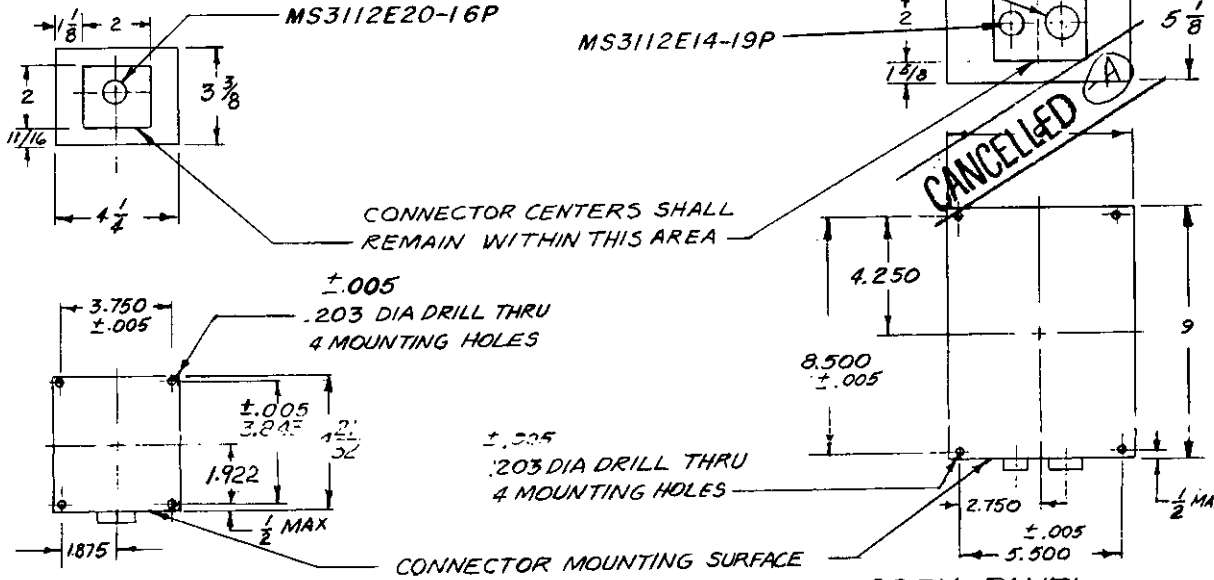

REGULATOR

SUPERVISORY PANEL

GENERATOR DATA	
RATED VOLTAGE	120/208
RATED OUTPUT	30 KVA
PHASE	3
SPEED RANGE	7600-8400 RPM
MAX SPEED FOR REGULATION	8800 RPM
OVERSPEED	10,500 RPM
RATED POWER FACTOR	0.75 LAGGING TO 1.0
EFFICIENCY MIN AT RATED LOAD	85%
MAX WEIGHT	68 LB
OVERHUNG MOMENT - MAX	400 IN-LB
FREQUENCY	380-420 CPS
CLASS	C
SHEAR	3000 IN-LB ±10%
FLEXIBLE DRIVE	NOT REQUIRED

REGULATOR DATA	
REGULATOR WEIGHT -- MAXIMUM	4 LB

SUPERVISORY PANEL DATA	
SUPERVISORY PANEL WEIGHT -- MAXIMUM	6 LB

SYSTEMS DATA

TYPE	GENERATOR	ROTATION	REGULATOR AND SUPERVISORY PANEL
MS25364-1	BRUSH TYPE	CLOCKWISE	AS REQUIRED
MS25364-2	BRUSH TYPE	COUNTERCLOCKWISE	
MS25364-3	BRUSHLESS	CLOCKWISE	
MS25364-4	BRUSHLESS	COUNTERCLOCKWISE	

(A) CANCELLED AFTER 28 April 1966 NO SUPERSEDING STANDARD

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

APPROVED 19 August 1959 REVISED (4) 28 April 1966

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. BUREAU OF AERONAUTICS
Other Cust

TITLE
GENERATOR SYSTEM, ALTERNATING CURRENT, INTEGRALLY EXCITED, 30KVA

MILITARY STANDARD
MS 25364(AER)

PROCUREMENT SPECIFICATION
MIL-G-21480(AER)

SUPERSEDES:

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:09Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.