

FED. SUP CLASS
2920

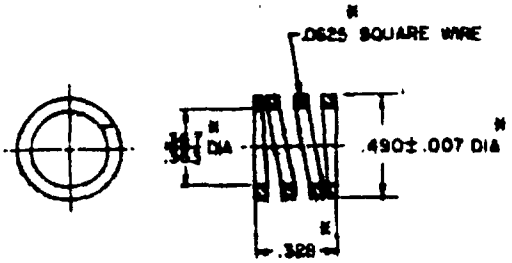

DETAIL OF SPRING

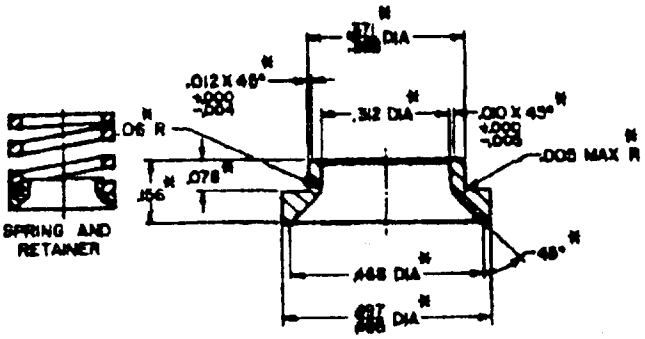

DETAIL OF RETAINER

DIMENSIONS ARE IN INCHES

NOTES:

(5) 1. MATERIAL: SPRING; STEEL WIRE, .0626 SQUARE, MIL-W-21425, TYPE 1.

2. MATERIAL RETAINER: STEEL, CARBON; C1015 TO C1025, QQ-S-630,

(B) 3. FINISH: SPRING AND RETAINER; CADMIUM PLATING; QQ-P-416, Class 3. WITHIN ONE HOUR AFTER PLATING SPRING SHALL BE BAKED FOR 2 HOURS AT 375° ± 15° F.

4. SPRING ENDS: CLOSED AND GROUND SQUARE; 2 1/2 EFFECTIVE COILS; COMPRESSIBLE TO 1/4 INCH OVERALL LENGTH UNDER 15 ± 3 POUND LOAD.

5. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES, TOLERANCES ARE ± .005 ON DECIMALS, ± 2° ON ANGLES.

6. SHEET 2 IS IDENTICAL WITH SHEET 1, EXCEPT THAT DIMENSIONS ARE IN MILLIMETERS.

7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

(B) 8. RECYCLED MATERIALS. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATIONS WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

NOTE:
CERTAIN PROVISIONS (IDENTIFIED BY *) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO STANAG 4005. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

(B) FOR CHANGES SEE SHEET 1 AND 2

REVIEW ACTIVITIES: ME
USER ACTIVITIES: ARMY-EL; GL; NAVY-MC


APPROVED 14 APRIL 1958 REVISED (A) 3 NOVEMBER 1966 (B) 31 MARCH 1978

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A. ARMY-AT Other Cust AF-99	INTERNATIONAL INTEREST	TITLE: SPRING AND RETAINER, ELECTRICAL TERMINAL: SPARK PLUG CABLE (OTHER THAN AIRCRAFT)	MILITARY STANDARD MS 51015
PROCUREMENT SPECIFICATION NONE		SUPERSEDES	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:53Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2920

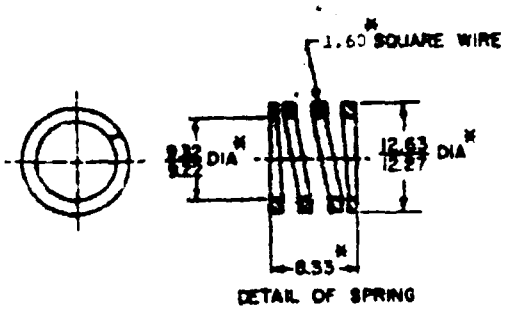

DETAIL OF SPRING

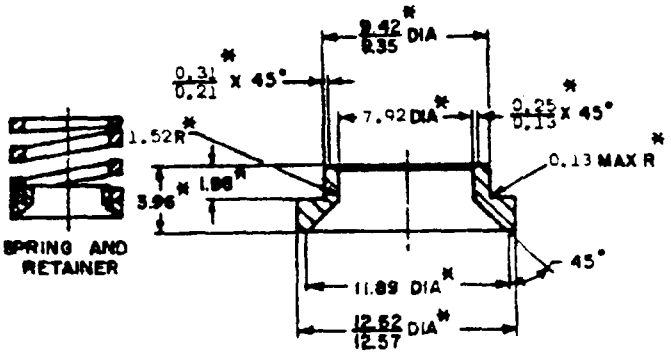

SPRING AND RETAINER

DETAIL OF RETAINER

DIMENSIONS ARE IN MILLIMETERS

NOTES:

1. MATERIAL: SPRING: STEEL WIRE, MIL-W-21425 TYPE I EXCEPT WIRE SIZE 1.60 MM SQUARE; HOWEVER, SPECIFICATION AND EQUIVALENT DIMENSIONAL TOLERANCES FOR .0625 INCH SQUARE WIRE APPLY.
2. MATERIAL RETAINER: STEEL, CARBON; C1015 TO C1025, QQ-S-630.
3. FINISH: SPRING AND RETAINER; CADMIUM PLATING; QQ-P-416, CLASS 3. WITHIN ONE HOUR AFTER PLATING SPRING SHALL BE BAKED FOR 2 HOURS AT 375° + 15° F.
4. SPRING ENDS: CLOSED AND GROUND SQUARE; 2 1/2 EFFECTIVE COILS; COMPRESSIBLE TO 6.35 MILLIMETERS OVERALL LENGTH UNDER 6.80 ± 1.36 KILOGRAMS LOAD.
5. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS; TOLERANCES ARE ± 0.13.
6. SHEET 1 IS IDENTICAL WITH SHEET 2 EXCEPT THAT DIMENSIONS ARE IN INCHES.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
8. RECYCLED MATERIALS. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATIONS WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

NOTE:
CERTAIN PROVISIONS (IDENTIFIED BY *) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO STANAG 4006. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

* U.S. GOVERNMENT PRINTING OFFICE 1978-703-122/1933

APPROVED 14 APRIL 1958 REVISED (A) 3 NOVEMBER 1966 (B) BOX DIMENSIONS SHEET 1 AND 2

P.A. Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		SPRING AND RETAINER, ELECTRICAL TERMINAL SPARK PLUG CABLE (OTHER THAN AIRCRAFT)	MS51015
PROCUREMENT SPECIFICATION NONE		SUPERSEDING	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:53Z
Check the source to verify that this is the current version before use.