operation the United States Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto

FED SUP CLASS
5315

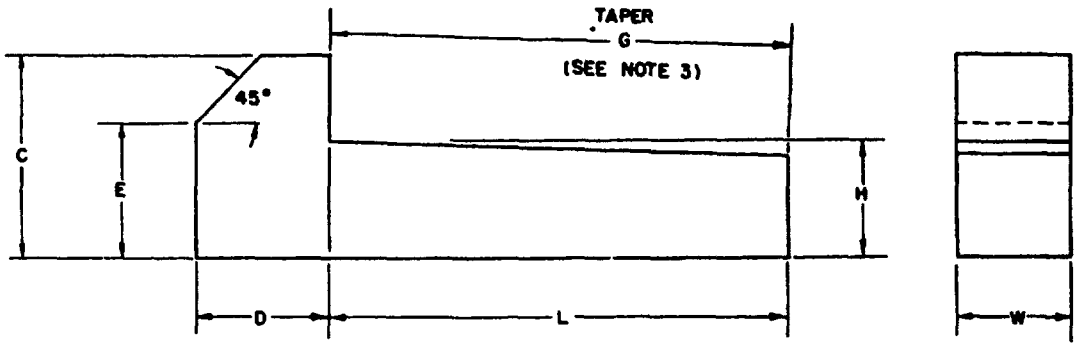

NOMINAL SIZE		1/8	3/16	1/4	3/8	1/2	5/8	3/4	7/8	1
W WIDTH	Max.	.126	.1895	251	.376	.501	.626	.751	.876	1.001
	Min	.125	.1875	.250	.375	.500	.625	.750	.875	1 000
H HEIGHT	Max.	.127	.1895	252	.377	.5025	6275	.7525	878	1.003
	Min.	.125	.1875	.250	.375	.5000	6250	.7500	.875	1.000
C HEAD HEIGHT	± 1/32	1/4	5/16	7/16	11/16	7/8	1-1/16	1-1/4	1-1/2	1-3/4
D HEAD LENGTH	± 1/32	7/32	9/32	11/32	15/32	19/32	23/32	7/8	1	1-3/16
E EDGE	± 1/32	5/32	7/32	11/32	15/32	5/8	3/4	7/8	1	1-3/16

L LENGTH	± .010	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number
1		1	5	9	14	19				
1-1/4		2	6	10	15	20				
1-1/2		3	7	11	16	21	24	27		
1-3/4		4	8	12	17	22	25	28		
6				13	18	23	26	29	30	31

MATERIAL: Steel, Carbon, Grade C, in accordance with procurement specification 00-K-220.

PROTECTIVE COATING: Uncoated

DIMENSIONS: All dimensions are in inches unless otherwise specified

TOLERANCES: ± 5° on the angle.

PART NUMBER: The MS part number consists of the MS number plus the dash number. Example: MS51935-1.

NOTES: (1) For design feature purposes, this standard takes precedence over procurement documents referenced herein

(2) Referenced documents shall be of the issue in effect on date of invitations for bid.

(3) Taper "G" shall be 1/8 inch per foot of length "L".

APPROVED 16 APRIL 63 REVISED

Department of the Army is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

P A WC Other Cust	TITLE KEY, MACHINE - GIB HEAD	MILITARY STANDARD MS51935(WC)
PROCUREMENT SPECIFICATION 00-K-220	SUPERSEDES BGFX1 and BGGX1	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:13Z
Check the source to verify that this is the current version before use.