A-A-1281A
March 31, 1989
SUPERSEDING
A-A-1281
September 3, 1980

COMMERCIAL ITEM DESCRIPTION

SORBENT, OIL (PARTICULATE)

The General Services Administration has authorized the use of this Commercial Item Description (CID) in preference to MIL-S-28600(YD) in part.

Abstract. This CID covers oil sorbents for pickup of large oil spills in open areas.

Salient characteristics. The sorbents shall be nontoxic to aquatic life, and shall not pollute waters or shorelines, or react with oil. A plainly printed label shall be attached to the sorbent container warning personnel against possible health hazards.

1. Sieve analysis. The sorbents shall have sieve analysis of not less than 90 ±2 percent retention when 2 g sample is shaken for 5 minutes through a mechanical NO. 100 U.S. Standard Sieve.

2. Oil adsorption ratio. The oil adsorption ratio shall be not less than 12 g of No. 2 Fuel Oil per gram of sorbent. The sorbent shall float when saturated and when tested in accordance with ASTM F 726.

3. Fire resistant. The sorbent in its unused dry state shall be rated as resistant to flammability in accordance with ASTM D 2859.

Beneficial comments (recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: Commanding Officer, Naval Facilities Engineering Command, Code 156, Port Hueneme, CA 93043

FSC 9330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.


4. Ignition temperature. The sorbent shall have a self-ignition temperatuare greater than 150 degrees Centigrade (° C) when tested in accordance with ASTM D 1929.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID, and that the product conforms to the producer's own drawings, specifications, standards, quality assurance pracatices, and is the same as the product offered for sale in the commercial market place. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-50 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. The packaging, packing, and marking shall be in accordance with ASTM D 3951.

CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor. Part numbers shall be determined as follows:

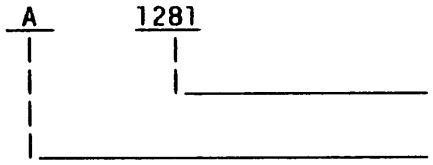

Notes.

ASTM standards are available from the ASTM, 1916 Race Street, Philadelphia, PA 19103.

Retrieval of the saturated sorbent should be done in accordance with manufacturer's instructions.

MILITARY INTERESTS:

Custodians

Navy - YD
Air Force - 84

Review Activities

Navy - AS
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY

GSA - 7FXE

PREPARING ACTIVITY:
Navy - YD

Project 9330-1057

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.