INCH-POUND

A-A-2532A
May 16, 2002
SUPERSEDING
A-A-2532
January 15, 1987

COMMERCIAL ITEM DESCRIPTION

BEVELS, SLIDING T

The General Services Administration has authorized the use of this Commercial Item Description by all federal agencies.

1. SCOPE. This Commercial Item Description covers sliding T-bevels, used by machinists and carpenters for measuring and transferring angles in layout work.

2. CLASSIFICATION. The sliding T- bevels shall conform to the following types.

2.1 Type I. Wood handle.


2.2 Type II. Plastic handle.

3. SALIENT CHARACTERISTICS.

3.1 Design. The bevel shall consist of a blade and handle with a locking device to hold the blade in any position relative to the handle.

3.1.1 Type I, handle. Handles shall be made of straight grained, hardwood, with a smooth finish, and treated to prevent absorption of moisture. Handles shall be bound at each end by metal tips, which are securely fastened to the handle. The handles shall measure 5-9/16 inches (+/-1/8 inch) in length, 1 inch (+/-1/8 inch) in width, and 23/32 inch (+/-1/16 inch) thick.

3.1.2 Type II, handle. Handles shall be made of rugged, one-piece plastic. The handles shall measure 5-9/16 inches (+/-1/8 inch) in length, 1 inch (+/-1/8 inch) in width, and 23/32 inch (+/-1/16 inch) thick.

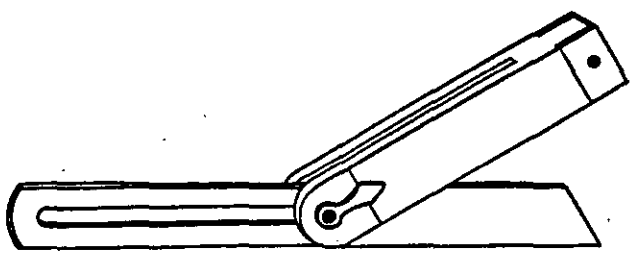

Sliding T-bevel

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Hardware SuperStore, 6FEE, 1500 Bannister Rd., Bldg.# 6, Kansas City, Missouri. 64131.

FSC 5210

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:23Z
Check the source to verify that this is the currentversion before use.

3.1.3 Blade. Blades shall be of tool or stainless steel with a blued, chrome plate or polished finish. Blades shall measure 8 inches (+/- 1/4 inch) in length, 1 inch (+/- 1/16 inch) in width, and .050 inch (+/- .005 inch) thick. When tested blades shall have a minimum hardness of 90 on the Rockwell B scale in accordance with ASTM E 18.

3.1.4 Locking device. The T-bevel shall include a bolt and wing nut, thumbnut, or cam lock to hold the blade in any desired position.

3.2 Identification marking. The tool shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture, unless otherwise specified. All identification markings shall be etched, engraved, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.3 Workmanship. Details of workmanship shall be in accordance with the best commercial practices. Paints, coatings, plating, and finishes shall be smooth, adherent, continuous and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g. sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g. pits, rips, fins, burrs, tears, nodules, cracks, or blisters), which may adversely impact the item's serviceability, durability, safety, or appearance

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The supplier/manufacturer is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch- pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. PRODUCT CONFORMANCE.

5.1 Product Conformance. The products provided shall meet the salient characteristics of this Commercial Item Description, conform to the supplier's own drawings, specifications, standards and quality assurance practices, and the same product and offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Responsibility for inspection. Unless otherwise specified, the supplier is responsible for the performance of all inspection requirements and may use any commercial facilities (including the supplier's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

6. PACKAGING. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

7. NOTES.

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Acquisition Regulation (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20401-9371

GSA Specification Section (3FP-E), Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC, 20407.

American Society for Testing and Materials (ASTM), 100 Barr Harbor Drive, West Conshohocken, PA, 19428-2959.

7.2 National Stock Numbers (NSNs). The following NSN corresponds to the styles specified in this CID This NSN may not be indicative of all possible NSNs associated with this CID.

NSN	Type
5210-00-278-0645	II

7.3 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number, and date of Commercial Item Description.
(b) The type.
(b) When applicable, the appropriate NSN.

7.4 Key words. Sliding T-bevel

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions and amendments to this Commercial Description until further notice.

Preparing Activity:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.