

FED. SUP CLASS
6675

TYPE II




TYPE III

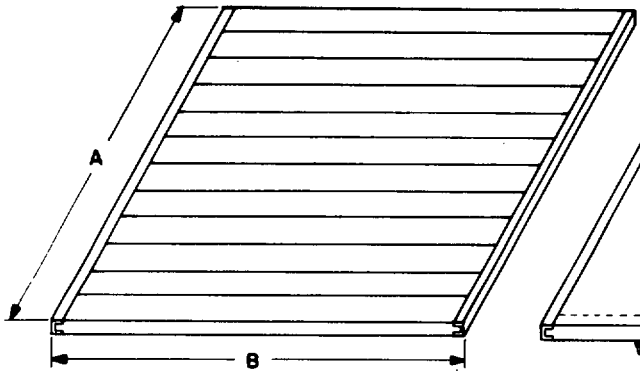


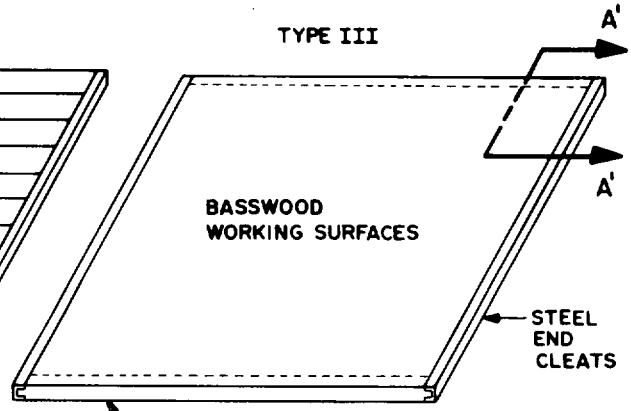


STEEL END CLEAT SHAPE AND METHOD
OF ATTACHMENT TO ENDS OF BOARD

TYPE IV
(DASH 7 ONLY)

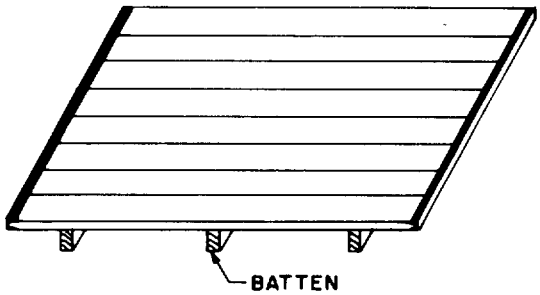

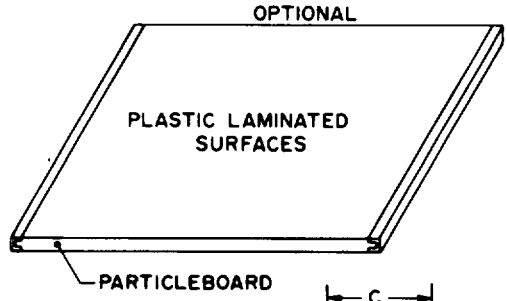



SECTION A'-A'

TYPE II-III-IV

MS DASH NO.	A ± 1/4	B ± 1/4	C ± 1/8
-1	23	31	7/8
-2	31	42	7/8
-3	38	48	1-1/16
-4	43-1/2	60	1-1/16
-5	43-1/2	72	1-1/16
-6	43-1/2	84	1-1/16
-7	60	120	1-1/16
-7(OPT)	60	108	5/8

REVIEW ACTIVITIES: GS, 82, AR
USER ACTIVITIES: MC

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

APPROVED 30 DECEMBER 1960 REVISED (A) 21 JULY 1964 (B) 17 JULY 1970 (C) 2 AUGUST 1978 (D) 3 DECEMBER 1984

P.A. ARMY-ME Other Cust NAVY-YD AIR FORCE-99	TITLE DRAWING BOARDS TYPE II-III-IV	MILITARY STANDARD MS 39124
PROCUREMENT SPECIFICATIONS GG-D-635	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT 6675-0774

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:46Z
Check the source to verify that this is the current version before use.

NOTES:

1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(D) 3. ALL DIMENSIONS IN INCHES. TOLERENCES NOT SPECIFIED SHALL BE: PLUS 1/32 INCH FOR DASH 1 THRU 6, PLUS 1/8 INCH FOR DASH 7. WORK SURFACES SHALL BE A TRUE PLACE WITHIN 1/64 INCH (DASH 1 THRU 6), 1/8 INCH (DASH 7), FOR 12-INCHES OF LENGTH OR WIDTH, AND SHALL NOT BE CUMULATIVE WITHIN ANY 12-INCH INCREMENT. ANY DEVIATION SHALL BE EVENLY DISTRIBUTED OVER THE ENTIRE INCREMENT. ALL EDGES SHALL BE STRAIGHT WITHIN 1/64 INCH (DASH 1 THRU 6) AND 1/8 INCH (DASH 7) END TO END. A PERMANENT COVER SHALL BE FURNISHED FOR DASH 7. THE COVER SHALL BE REVERSIBLE, FLEXIBLE, AND WITH A CUSHIONING SURFACE ON BOTH SIDES. THE COVER SHALL BE FASTENED WITH DOUBLE-FACED TAPE.

(D) 4. TYPE IV (DASH 7, OPTIONAL). NO BATTENS ARE REQUIRED. THE PLASTIC LAMINATE SHALL COVER ALL WORKING SURFACES AND EDGE BANDINGS. THE PLASTIC LAMINATE SHALL BE THERMAL FUSED TO THE PARTICLEBOARD. A PERMANENT COVER IS REQUIRED.

APPROVED 30 DECEMBER 1960 REVISED (C) 2 AUGUST 1978 (D) 3 DECEMBER 1984

P.A. ARMY - ME Other Cust NAVY - YD AIR FORCE - 99	TITLE DRAWING BOARDS TYPE II, III, IV	MILITARY STANDARD MS 39124
PROCUREMENT SPECIFICATIONS GG-D-635	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:46Z
Check the source to verify that this is the current version before use.